


③ **USB2.0 COMPLIANT**

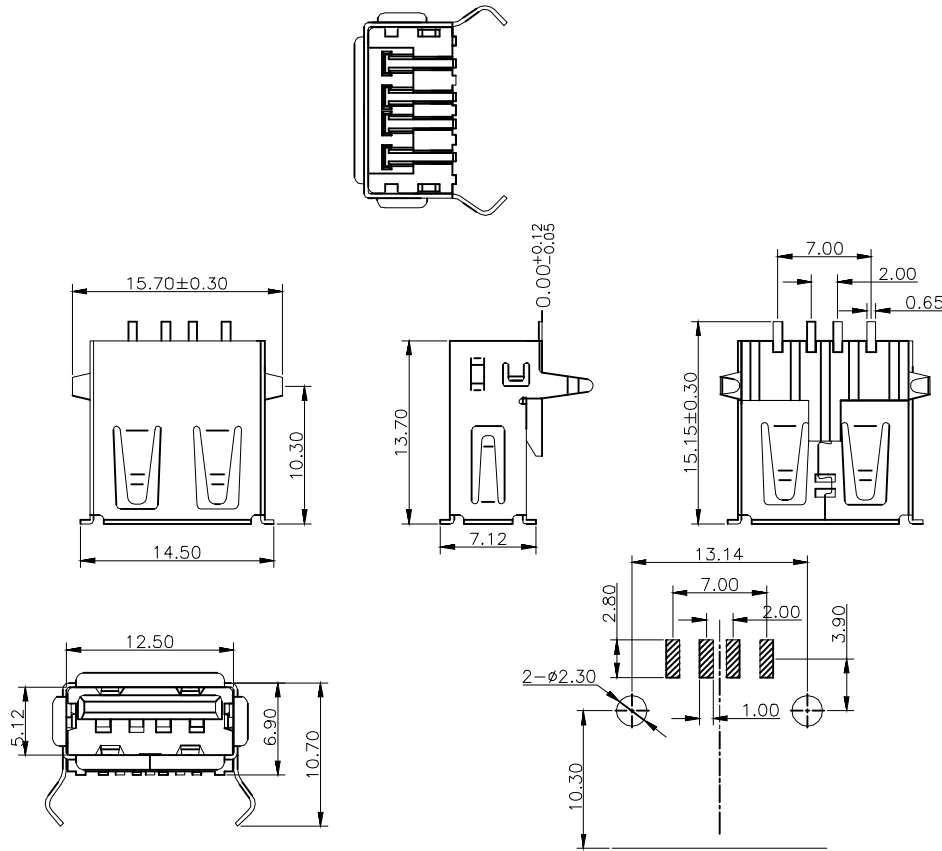

RECOMMENDED P.C.B LAYOUT

NOTES:

- 1.Material:
 - 1.1 Housing: LCP+30%GF UL94V-0, Color Black
 - 1.2 Shell: Brass
 - 1.3 Contact :Phosphor Bronze
2. FINISH:
 - 2.1 Contact Area: Selective 30u"Au
 - Solder Area: Tin Plated
 - Under: Ni Plated
- 3.MECHANICAL:
 - 3.1 Mating Force:3.57kgf Max.
 - 3.2 Unmating Force:1.02kgf Min
 - 3.3 Durability:1500 cycles Min
- 4.ELECTRICAL:
 - 4.1 Current Rating:1.5A
 - 4.2 Dielectric Strength:500V AC FOR 1 MINUTE
 - 4.3 Contact Resistance:30mΩ Max
 - 4.4 Insulation Resistance:1000 MΩ Min
- 5.Operating temperature: -55°C TO +85°C
- ② 6.PACKIING: Tray

RoHS compliant

Scale	Free				Date	Name	Customer-No.
TOLERANCE					Drawn	07.06.2013	Winnie
.X	±0.30						
.XX	±0.20	③	Update	24.07.2019	Xavier	Approved	14.07.2014
.XXX	±0.10	②	Correct the packing tape&reel to tray	14.07.2014	Winnie		
DIM	TOL	①	Change the P/N AU-Y1006-2-R into AU-Y1006-2	22.01.2014	Winnie		
X.°	±5°	①	Drawn	07.06.2013	Winnie		
Angle	TOL	①	Drawn	07.06.2013	Winnie		
UNIT	mm	Id.	Modification	Date	Name		

ASSMANN
WSW components

ASSMANN WSW-No.		
① AU-Y1006-2		
Drawing-No.	ASS 5774 CO	rev03
Replace	SHEET	