

## Product Datasheet

### LSWM1QSTK3-C

H3C® Compatible 40Gb/s 4SFP+ Direct Attach Cable  
Copper, Passive, 1m

#### FEATURES

- Compliant with SFF- 8436, SFF-8431, SFF-8432 and SFF-8472
- Up to 10. 3125Gbps data rate per channel
- Up to 7m transmission
- Operating temperature: 0°C to +70°C
- Single 3.3V power supply
- RoHS compliant
- Cost-effective copper solution
- Lowest total system power solution
- Lowest total system EMI solution
- Optimized design for Signal Integrity

#### APPLICATIONS

##### Data

- Servers
- Networked storage systems
- Routers
- External storage systems
- Data Center networking

##### Communications

- Switches
- Routers

#### INDUSTRIAL STANDARDS

- InfiniBand Trade Association (IBTA)
- IEEE802.3ba
- 40Gigabit Ethernet (40G BASE – CR4)

## Product Datasheet

### DESCRIPTION

ATGBICS QSFP+ (Quad Small Form-factor Pluggable Plus) copper direct-attach cables are suitable for very short distances and offer a highly cost-effective way to establish a 40-Gigabit link between QSFP+ ports of QSFP+ switches within racks and across adjacent racks. These cables are used for 40GbE and Infiniband standards, to maximize performance. QSFP+ are designed to meet emerging data center and high-performance computing application needs for a high-density cabling interconnect system capable of delivering an aggregate data bandwidth of 40Gb/s. This interconnect system is fully compliant with existing industry standard specifications such as the QSFP MSA and IBTA (InfiniBand Trade Association). The QSFP+ cables support the bandwidth transmission requirements as defined by IEEE 802.3ba (40 Gb/s) and Infiniband QDR (4x10 Gb/s per channel) specifications.


## Product Datasheet

### QSFP+ Pin Function Definition

Pin	Logic	Symbol	Description
1		GND	Ground
2	CML-I	Tx2n	Transmitter Inverted Data Input
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input
4		GND	Ground
5	CML-I	Tx4n	Transmitter Inverted Data Input
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input
7		GND	Ground
8	LVTTL-I	ModSelL	Module Select
9	LVTTL-I	ResetL	Module Reset
10		Vcc Rx	+3.3V Power Supply Receiver
11	LVC MOS-I/O	SCL	2-wire serial interface clock
12	LVC MOS-I/O	SDA	2-wire serial interface data
13		GND	Ground
14	CML-O	Rx3p	Receiver Non-Inverted Data Output
15	CML-O	Rx3n	Receiver Inverted Data Output
16		GND	Ground
17	CML-O	Rx1p	Receiver Non-Inverted Data Output
18	CML-O	Rx1n	Receiver Inverted Data Output
19		GND	Ground
20		GND	Ground
21	CML-O	Rx2n	Receiver Inverted Data Output
22	CML-O	Rx2p	Receiver Non-Inverted Data Output
23		GND	Ground
24	CML-O	Rx4n	Receiver Inverted Data Output
25	CML-O	Rx4p	Receiver Non-Inverted Data Output
26		GND	Ground
27	LVTTL-O	ModPrsL	Module Present
28	LVTTL-O	IntL	Interrupt
29		Vcc Tx	+3.3V Power supply transmitter
30		Vcc1	+3.3V Power supply

## Product Datasheet

<b>31</b>	LVTTTL-I	LPMMode	Low Power Mode
<b>32</b>		GND	Ground
<b>33</b>	CML-I	Tx3p	Transmitter Non-Inverted Data Input
<b>34</b>	CML-I	Tx3n	Transmitter Inverted Data Input
<b>35</b>		GND	Ground
<b>36</b>	CML-I	Tx1p	Transmitter Non-Inverted Data Input
<b>37</b>	CML-I	Tx1n	Transmitter Inverted Data Input
<b>38</b>		GND	Ground

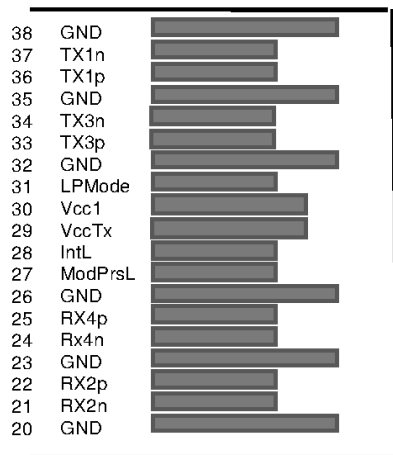

Top Side  
Viewed From Top



Bottom Side  
Viewed From Bottom

Module Card Edge

## Product Datasheet

### SFP+ Pin Function Definition

Pin	Logic	Symbol	Description
1		VeeT	Module Transmitter Ground
2	LVTTL-O	Tx_Fault	Module Transmitter Fault
3	LVTTL-I	Tx_Disable	Transmitter disable; Turns off transmitter laser output
4	LVTTL-I/O	SDA	2-wire Serial Interface Data Line (Same as MOD-DEF2 in INF-8074i)
5	LVTTL-I/O	SCL	2-wire Serial Interface Clock (Same as MOD-DEF1 in INF-8074i)
6		Mod_ABS	Module Absent, connected to VeeT or VeeR in the module
7	LVTTL-I	RS0	Rate Select 0, optionally controls SFP+ module receiver
8	LVTTL-O	Rx_LOS	Receiver Loss of Signal Indication (In FC designated as Rx_LOS and in Ethernet designated as Signal Detect)
9	LVTTL-I	RS1	Rate Select 1, optionally controls SFP+ module transmitter
10		VeeR	Module Receiver Ground
11		VeeR	Module Receiver Ground
12	CML-O	RD-	Receiver Inverted Data Output
13	CML-O	RD+	Receiver Non-Inverted Data Output
14		VeeR	Module Receiver Ground
15		VccR	Module Receiver 3.3 V Supply
16		VccT	Module Transmitter 3.3 V Supply
17		VeeT	Module Transmitter Ground
18	CML-I	TD+	Transmitter Non-Inverted Data Input
19	CML-I	TD-	Transmitter Inverted Data Input
20		VeeT	Module Transmitter Ground



## Product Datasheet

### General Product Characteristics

Q/4SFP+ DAC Specifications	
Number of Lanes	Tx & Rx
Channel Data Rate	10.3125 Gbps
Operating Temperature	0 to + 70°C
Storage Temperature	-40 to + 85°C
Supply Voltage	3.3 V nominal
Electrical Interface	38 pins edge connector (QSFP+) 20 pins edge connector (SFP+)
Management Interface	Serial, I2C

### High Speed Characteristics

Parameter	Symbol	Min	Typical	Max	Unit	Note
Differential Impedance	TDR	90	100	110	Ω	
Insertion loss	SDD21	-17.04			dB	At 5.15625 GHz
Differential Return Loss	SDD11 SDD22			See 1	dB	At 0.05 to 4.1 GHz
				See 2	dB	At 4.1 to 11.1 GHz
Differential to common mode return loss	SCD11 SCD22			-10	dB	At 0.2 to 11.1 GHz
Common-mode to common-mode output return loss	SCC11 SCC22		-3		dB	At 0.01 to 11.1 GHz

#### Notes:

1. Reflection Coefficient given by equation  $SDD11(\text{dB}) < -12 + 2 \times \text{SQRT}(f)$ , with  $f$  in GHz
2. Reflection Coefficient given by equation  $SDD11(\text{dB}) < -6.3 + 13 \times \log_{10}(f/5.5)$ , with  $f$  in GHz

## Product Datasheet

### Mechanical Information

The connector is compatible with the SFF-8436 to SFF-8432 specification



Length (m)	Cable AWG
1	30
3	30
5	26
7	24

### Regulatory Compliance

Feature	Test Method	Performance
<b>Electrostatic Discharge (ESD) to the Electrical Pins</b>	MIL-STD-883C Method 3015.7	Class 1(>2000 Volts)
<b>Electromagnetic Interference (EMI)</b>	FCC Class B CENELEC EN55022 Class B CISPR22 ITE Class B	Compliant with Standards
<b>RF Immunity (RFI)</b>	IEC61000-4-3	Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz
<b>RoHS Compliance</b>	RoHS Directive 2011/65/EU and it's Amendment Directives (EU) 2015/863	RoHS (EU) 2015/863 compliant
<b>REACH Compliance</b>	REACH Regulation (EC) No 1907/2006	REACH (EC) No 1907/2006 compliant

## Product Datasheet

### AWG Information

Reach @ 10Gb/s (m)	AWG
0.5	30
1	30
2	30
3	28/30
4	28
5	24
7	24