

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A	39014031	3CKT RECEPTACLE HOUSING 555703R2210	1	PC
B	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	3	PC
C	--	RESIN BLEND STPRNE	A/R	KG
D	--	MOLD PART INNER CAP	2	PC
E	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	--	3CX16AWG UNSHD BK UL2464	BLACK
A2	--		RED
A3	--		WHITE

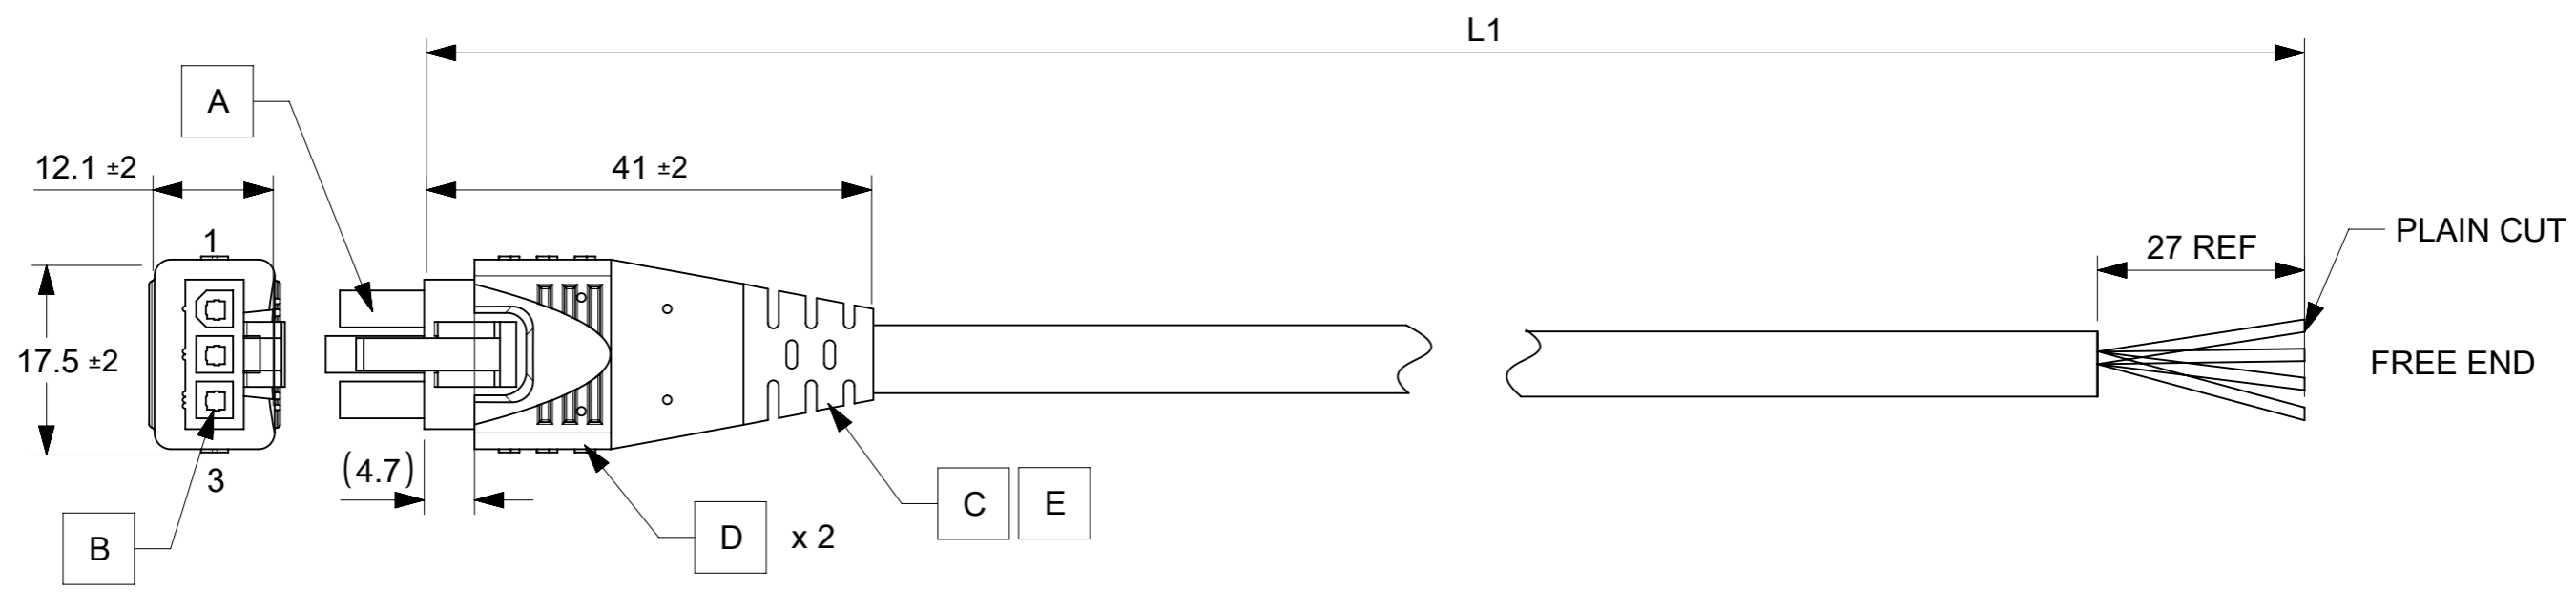


TABLE		
PART NUMBER	TITLE	L1
2171590305	3 CKT OVERMOLD MINIFIT JR PIGTAIL 500MM	500±10
2171590310	3 CKT OVERMOLD MINIFIT JR PIGTAIL 1M	1000±20
2171590320	3 CKT OVERMOLD MINIFIT JR PIGTAIL 2M	2000±25
2171590330	3 CKT OVERMOLD MINIFIT JR PIGTAIL 3M	3000±30

NOTES:

- MOLDING MATERIAL:
  - INNERCAP: PA66 NYLON RESIN.
  - OVERMOLD: SANTOPRENE TPE RESIN.
  - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
  - VOLTAGE RATING: 300V AC.
  - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
    - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
    - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
  - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
  - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		<b>molex</b>																							
	<table border="1"> <tr> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td>mm</td> <td>NTS</td> </tr> </table>	DIMENSION UNITS	SCALE		mm	NTS	<table border="1"> <tr> <td>EC NO: 740245</td> <td>2023/02/24</td> </tr> <tr> <td>DRWN: PRAVES6</td> <td>2023/03/29</td> </tr> <tr> <td>CHK'D: SKUMAR07</td> <td>2023/03/29</td> </tr> <tr> <td>APPR: SKUMAR07</td> <td></td> </tr> </table>		EC NO: 740245	2023/02/24	DRWN: PRAVES6	2023/03/29	CHK'D: SKUMAR07	2023/03/29	APPR: SKUMAR07		SEE TABLE										
DIMENSION UNITS	SCALE																										
mm	NTS																										
EC NO: 740245	2023/02/24																										
DRWN: PRAVES6	2023/03/29																										
CHK'D: SKUMAR07	2023/03/29																										
APPR: SKUMAR07																											
DIVISIONAL SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	INITIAL REVISION:		PRODUCT CUSTOMER DRAWING																							
	<table border="1"> <tr> <td>ANGULAR TOL</td> <td>±</td> <td>°</td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td></td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td></td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> </tr> </table>	ANGULAR TOL	±	°	4 PLACES	±		3 PLACES	±		2 PLACES	±		1 PLACE	±		0 PLACES	±		<table border="1"> <tr> <td>DRWN: SBS04</td> <td>2021/05/01</td> </tr> <tr> <td>APPR: MNARAYAN01</td> <td>2021/05/10</td> </tr> </table>	DRWN: SBS04	2021/05/01	APPR: MNARAYAN01	2021/05/10	DOCUMENT NUMBER	DOC TYPE	DOC PART
ANGULAR TOL	±	°																									
4 PLACES	±																										
3 PLACES	±																										
2 PLACES	±																										
1 PLACE	±																										
0 PLACES	±																										
DRWN: SBS04	2021/05/01																										
APPR: MNARAYAN01	2021/05/10																										
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER																				
			A3-SIZE	217159	SEE TABLE	GENERAL MARKET	1 OF 1																				