

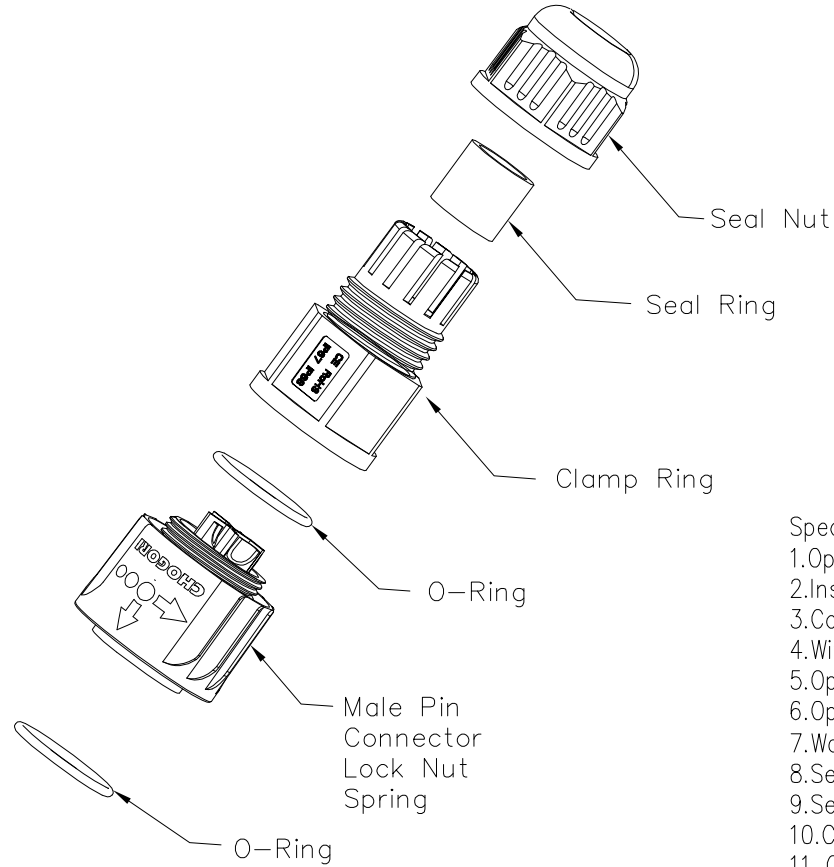
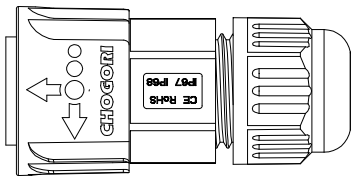

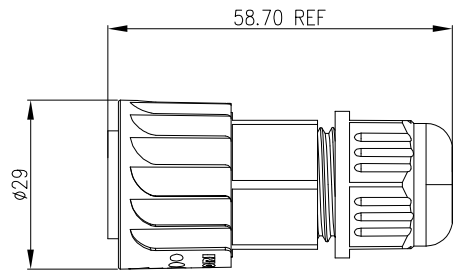


REV.	ECN NO.	DESCRIPTION	SIGN	DATE
C1	N/A	INITIAL DRAWING	Liu	2019/06/21



Specification:

- 1.Operation Temperature: -45℃~105℃.
- 2.Insulation Resistance: 100MΩ at DC500V.
- 3.Contact Resistance: <10mΩ.
- 4.Withstand Voltage: 1500V AC, 1min
- 5.Operating Current: 50A+15A+5A
- 6.Operating Voltage: AC 250V
- 7.Waterproof Rate: IP67 (Mated)
- 8.Seal Nut: Nylon, Black
- 9.Seal Ring: Silicon, Black.
- 10.Clamp Ring: Nylon, Black
- 11.O-Ring: Silicon, Red
- 12.Male Pin: Copper Alloy, Gold Plated
- 13.Connector: Nylon+GF, Black
- 14.Lock Nut: Nylon, Blue
- 15.Spring: SUS
- 16.O-Ring: Silicon, Red
- 17.RoHS Compliant.
- 18.Cable Range OD: φ6.5mm~φ10.5mm
- 19.Mating Cap: 804-00007-00

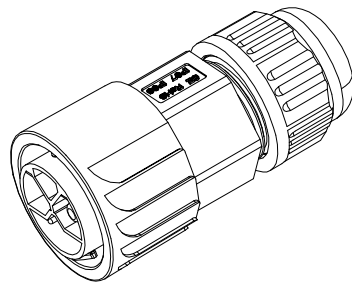

1+1+1 Pos

Pin Assignments
Front View

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.15
.XXX	±0.05
ANGLES	±1°

DESCRIPTION		Large Series 1+1+1 Pos Push Lock Male Plug With Male Pin	
SCALE:	N/A	SHEET	1 OF 1
REV.	C1	SIZE	A4
		* : Inspection Item	

CHOGORI

PART NO	24305131-02	DRAWN BY	Liu	DATE	2019/08/08
DWG NO		CHECKED BY	Mo	DATE	2019/08/08
CUSTOMER		APPROVED BY		DATE	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSE IS MADE BY YOU TO OTHER THAN CHOGORI PERSONNEL WITHOUT AUTHORIZATION FROM CHOGORI CORP.