


# APHC-07104-S

## Peltier cooler module

### Data sheet

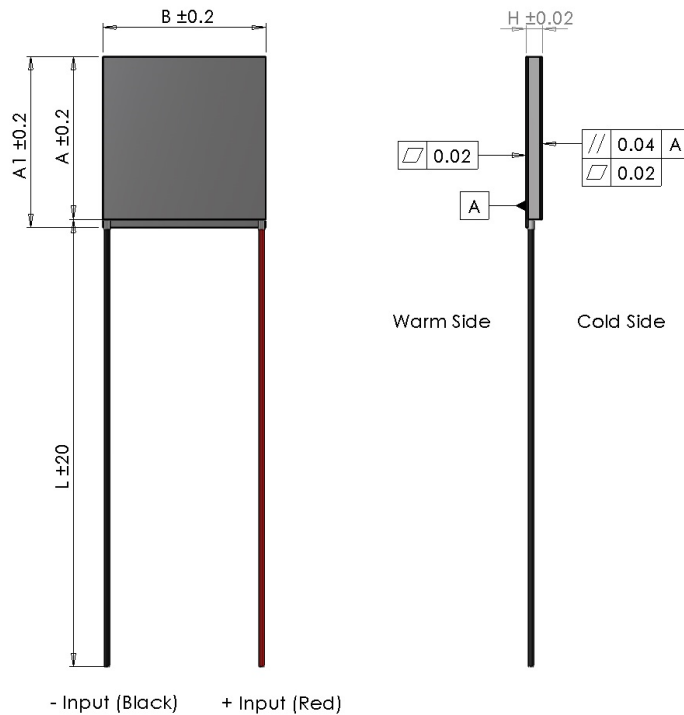

$I_{max}$	[A]	3.7
$V_{max}$	[Vdc]	8.2
$P_c \text{ max}$	[W]	20
ACR	[ $\Omega$ ]	1.8
$\Delta T_{max}$	[ $^{\circ}\text{C}$ ]	65
A	[mm]	23.5
A1	[mm]	23.5
B	[mm]	28
H	[mm]	3.33
L	[mm]	100
Wire	AWG	20

### Features

- RoHs and Reach 161 compliant
- Solid-state reliability
- Built with high temperature solder with the ability to withstand  $<200^{\circ}\text{C}$  assembly processing temperatures for short periods of time
- High integrity nickel diffusion barriers on elements
- High strength for rugged environments
- Porched style for enhanced leadwire strength
- Sealed & lapped for multi-module applications





- (At hot side temperature  $T_h = 27^{\circ}\text{C} / 300\text{K}$ , under dry  $\text{N}_2$ )
- $P_c \text{ max}$  = Cooling power at  $\Delta T = 0$  and  $I = I_{max}$
- $\Delta T_{max}$  = Temperature difference at  $I = I_{max}$  and  $P_c = 0$
- Max hot side temperature  $T_h = 200^{\circ}\text{C}$  for best long term performance
- Max mounting pressure: 1.5MPa
- Wires: UL-style 1569, 105oC (Unstripped)



# APHC-07104-S

## Peltier cooler module





Data sheet - At hot side temperature 25°C

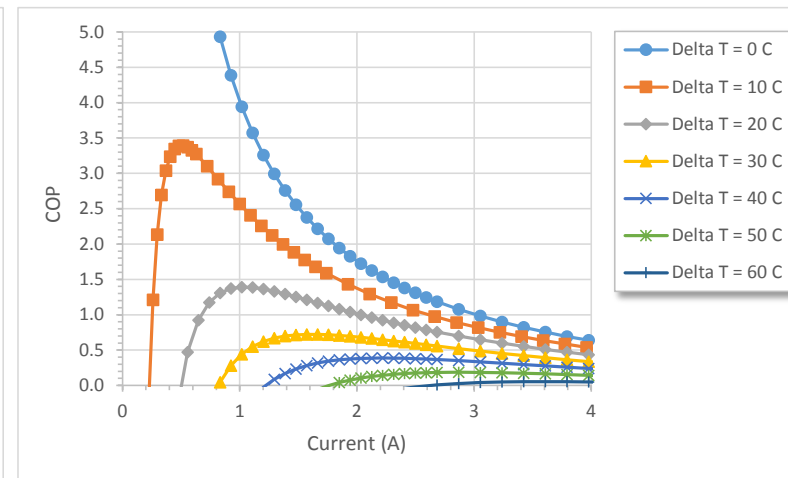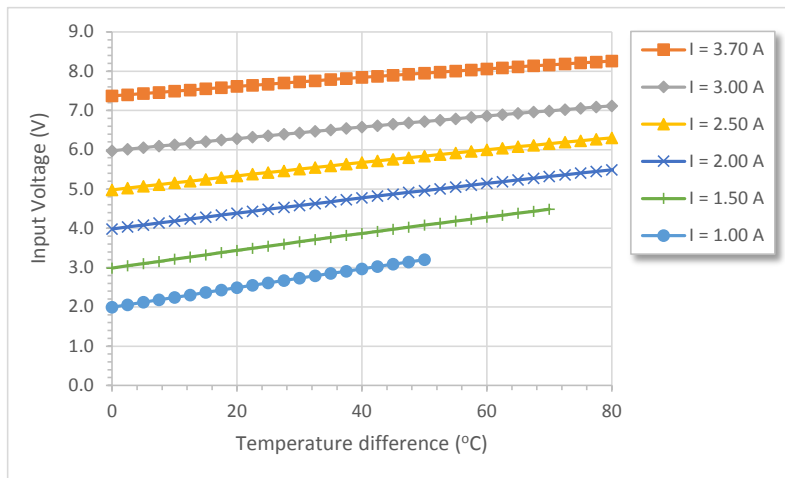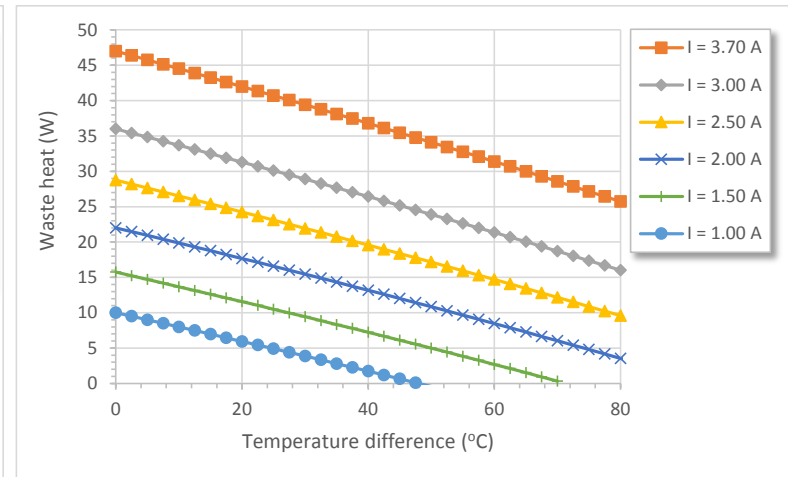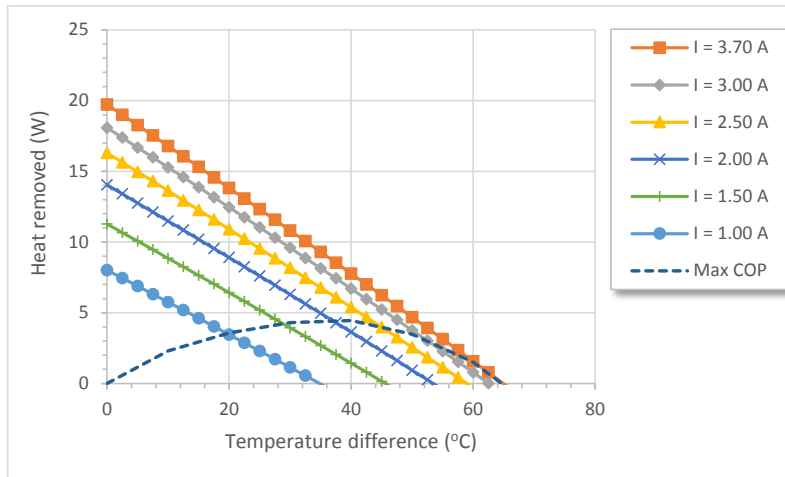

# APHC-07104-S

## Peltier cooler module

### Data sheet - At hot side temperature 50°C

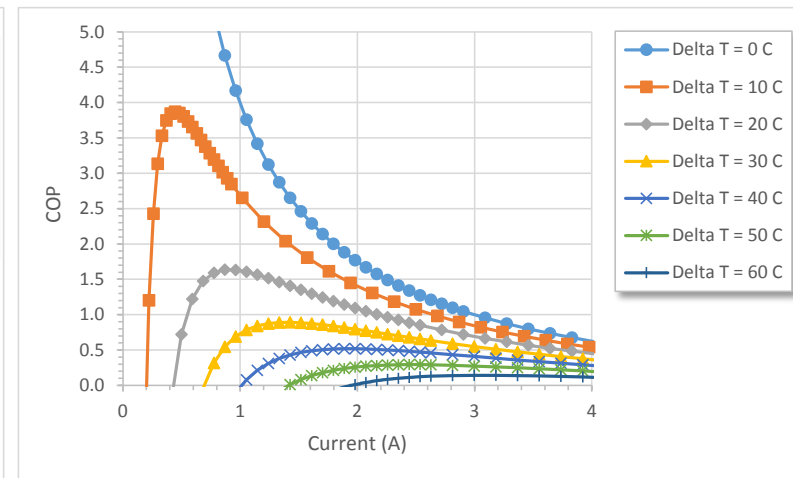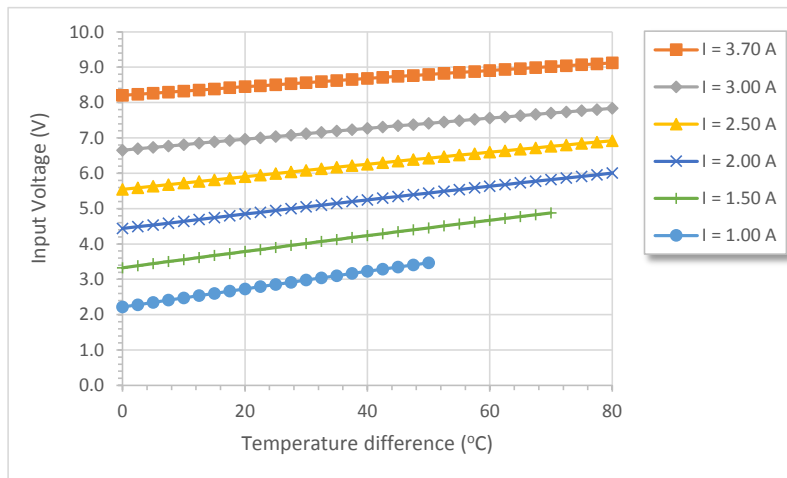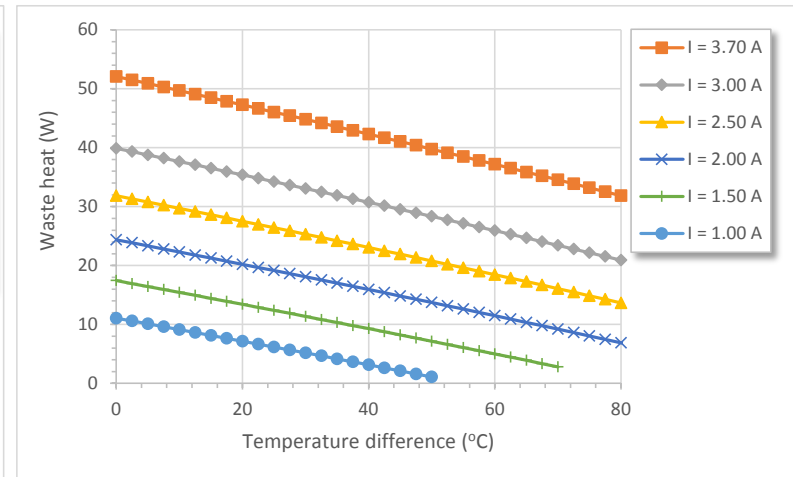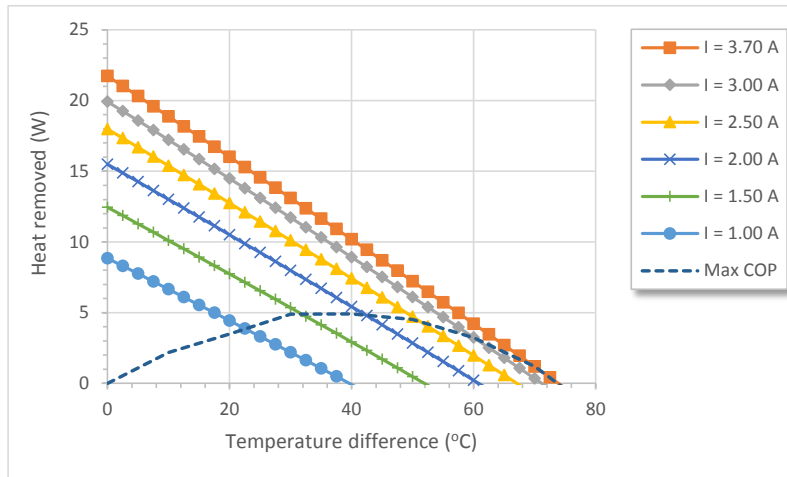

# APHC-07104-S

## Peltier cooler module

### Data sheet - At hot side temperature 75°C

