




Screw-Screwless Connectors

900 Q/12

terminal block, 12 pole, fixing: screw, clamping units per pole: 4, voltage rating: 450 V, current rating: 17.5 A, cross-section external: 2.5 mm², cross-section internal: 1.5 mm²

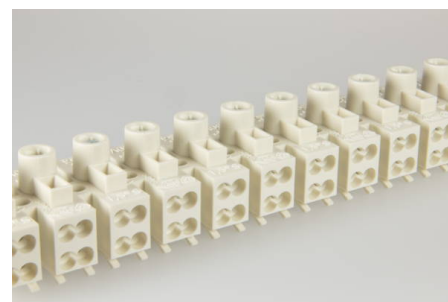

Order Info

| | |
|----------------------------|---------------|
| reference number (ref.no.) | 114012 |
| PU | 40 |
| EAN | 4028012104369 |

Type

| | |
|-------------------------|---------------------------|
| type | terminal block |
| number of poles | 12 pole |
| clamping units per pole | 4 |
| colour | white |
| cross-section rating | 1.5 / 2.5 mm ² |
| connection type | screw-screwless |

Technical Data

| | |
|-------------------------------------|-------------------------|
| voltage rating | 450 V |
| current rating | 17.5 A |
| insulating material | PA |
| contact material | brass |
| flammability rating | V-2 |
| max. ambient temperature operation | 85 °C |
| assembly contact screw | 0,8x4,0 / \cup 0,5 Nm |
| internal core cross-section min. | 0.5 mm ² |
| internal core cross-section max. | 1.5 mm ² |
| internal stripping length | 7.0-7.5 mm |
| external stripping length | 8.0-8.5 mm |
| fixing | screw |
| type of conductor solid external | yes |
| type of conductor flexibel external | yes |
| type of conductor solid internal | yes |
| type of conductor stranded internal | yes |
| cross-section external | 2.5 mm ² |
| cross-section internal | 1.5 mm ² |
| ammonia resistance | yes |

Approvals

| | |
|-------------------------|------------------------------|
| acc. to EN 60998 | Download PDF |
| acc. to UL | Download PDF |
| acc. to CSA | Download PDF |

Accessories

| | |
|----------------|--------|
| ZEL 110 | 196420 |
|----------------|--------|
