


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REV. BY ECO16-006304	29APR2016	HC	WLS
	A3	REV. BY ECO 17-007405	23MAY2017	HC	WLS

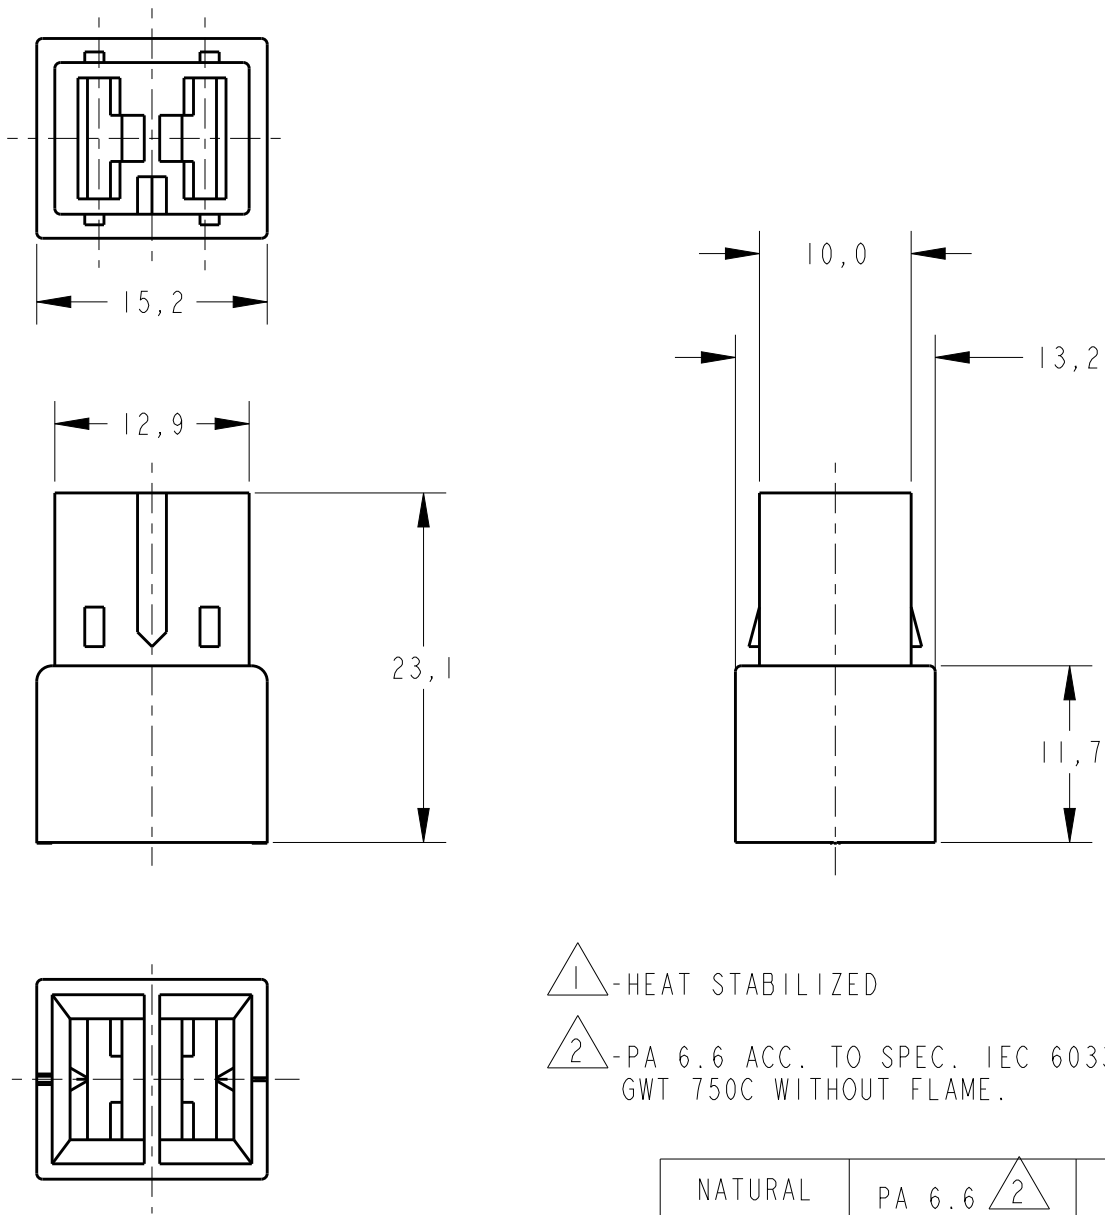

① - HEAT STABILIZED

② - PA 6.6 ACC. TO SPEC. IEC 60335-1
GWT 750C WITHOUT FLAME.

NATURAL	PA 6.6 ②	881600-5
BLACK	PA 6.6 ①	881600-4
BLACK	PA 6.6	881600-3
RED	PA 6.6	881600-2
NATURAL	PA 6.6	881600-1
FINISH	MATERIAL	PART NUMBER

OBSOLETE
OBSOLETE

THIS DRAWING IS UNPUBLISHED. BY - ALL RIGHTS RESERVED. 20

DIMENSIONS: mm		DWN H.C. CANTERI 28APR2016	MATERIAL -	FINISH -
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK W.L. STEFANI 29APR2016		
0 PLC ±-		APVD -		
1 PLC ±0,4		PRODUCT SPEC -	NAME 2 WAY FAST-IN-ON REC.HSG. .250 SERIES	
2 PLC ±-		APPLICATION SPEC -	SIZE A4	CAGE CODE -
3 PLC ±-		WEIGHT -	DRAWING NO C-881600	RESTRICTED TO -
4 PLC ±-			SCALE 2:1	SHEET 1 OF 1
ANGLES ±-				REV A3
		CUSTOMER DRAWING		