



**Electrical specifications**

**Center Frequency:** 2595 MHz  
**Bandwidth:** 50 MHz  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 2570-2620 MHz  
**Passband Insertion Loss:** 3.0 dB Max  
**Passband Ripple:** 0.5 dB max  
**Passband Return Loss:** 14 dB min  
**Rejection:** 40 dB min at 2467 MHz  
**Power Handling:** 1 W

**Mechanical**


**Mounting Method:** SMT  
**Dimensions:** 22.86 x 12.70 x 4.83 mm

**Environmental**

**Operating Temperature:** -40°C to +85°C  
**Storage Temperature:** -50°C to +90°C

**This product is RoHs compliant.**

**Outline Drawing:**

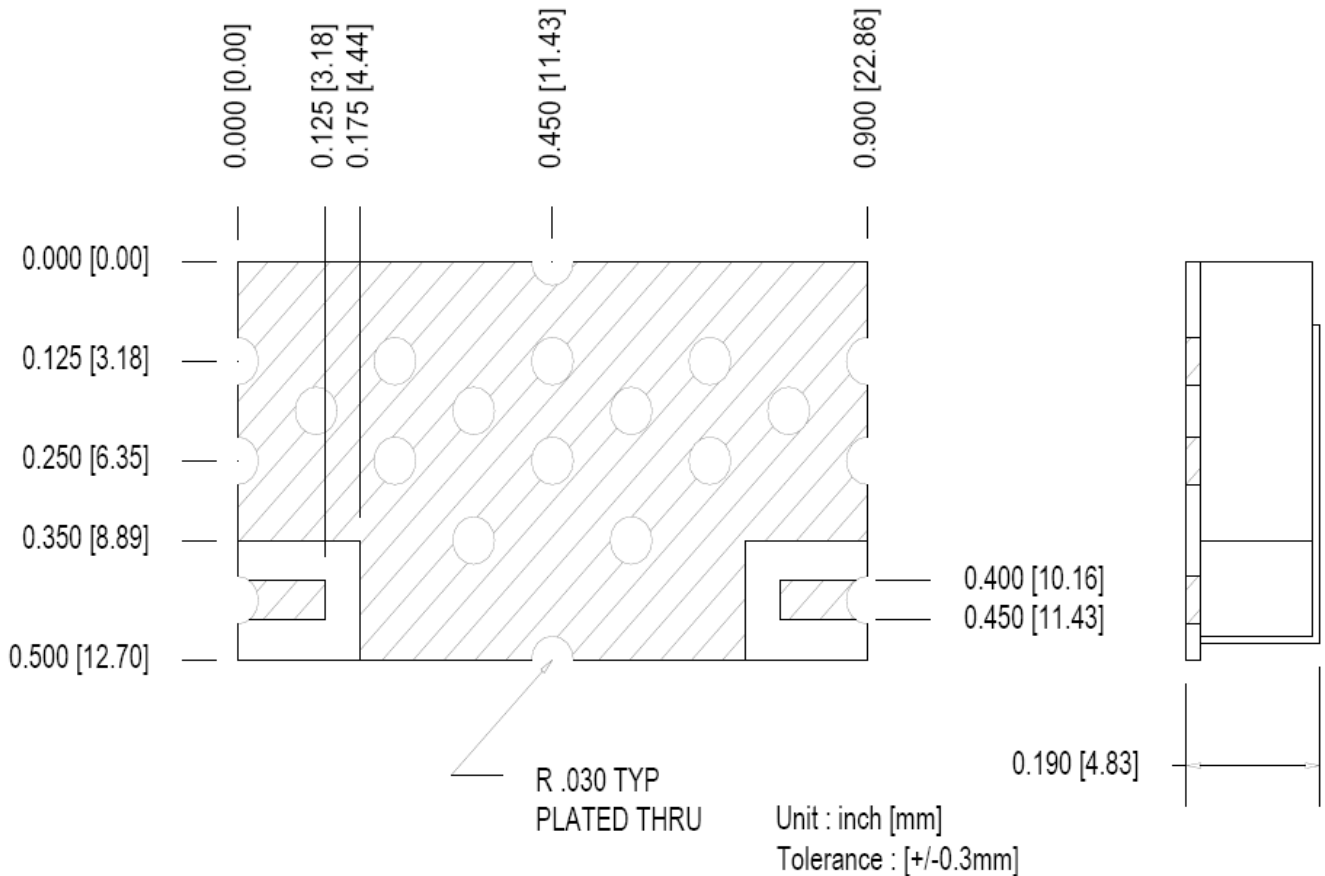



# 2595 MHz Ceramic Bandpass Filter

Part Number: AM2595B1231



## Response Plot:

