


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Date Code & Part No., Black Text.
3. Single Centered Marker on Cables of 6" and longer
4. Sweep Tested to validate Max VSWR @ Max Freq.
5. Store Hi-Point Data.

ConductRF(wk/yr)
FPA3C-PMRPMR-xxx

Marking Example

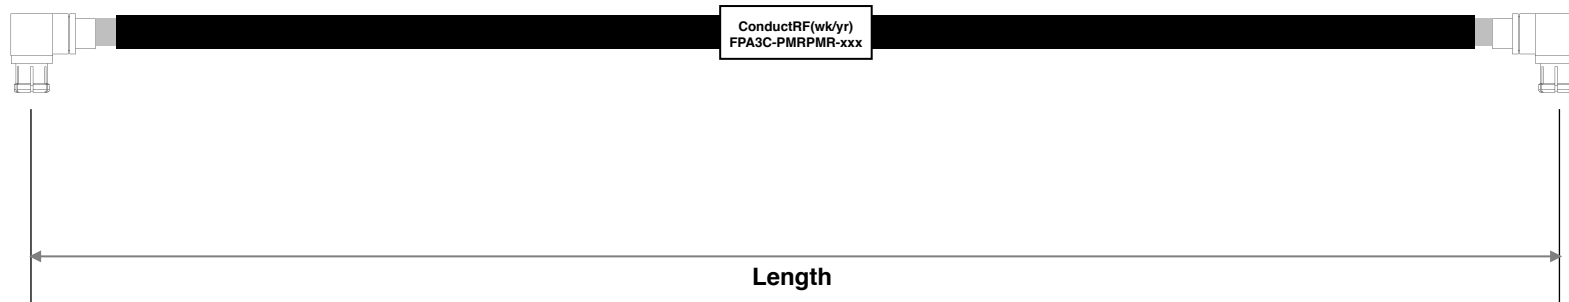


CRF #	Length	Typ. Insertion Loss(dB)		
		6GHz	12GHz	18GHz
XXX	Inches			
S04	4"	0.54	0.77	0.95
S05	5"	0.64	0.90	1.11
S06	6"	0.73	1.03	1.27
S08	8"	0.91	1.29	1.58
S12	12"	1.27	1.81	2.22
S16	16"	1.64	2.32	2.85
S18	18"	1.82	2.58	3.17
S24	24"	2.36	3.36	4.13
VSWR Max.		1.55:1		

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
SXX = Length in Inches (eg S18=18")
XMX = Length in Meters (eg 2M5=2.5m)
CXX = Length in CM (eg C50=50cm)

ITEM	DESCRIPTION	MATERIALS	FINISH
4	Label	B2 Shrink Tube	White
3	Flexible 0.047"	A33RFJ	Black FEP
2	SMPM R/A F	PMF21D-A33G01	Gold
1	SMPM R/A F	PMF21D-A33G01	Gold

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: SMPM R/A Jumper - 0.047" Flex to 18GHz				
1	Pre-Release		DG	02/12/21	Remarks:	Originated: 02/12/21	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: FPA		Sheet 1 of 1
								Dwg Ref: FPA33-PMRPMR		
REVISION HISTORY					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 1		Part No: FPA3C-PMRPMR-xxx