



4308U


**DIN RAIL
POWER RELAY**

11/14/14

FEATURES

- DIN rail power relay
- Relay output form: 3PDT – 8 Amps
- Output indicator is intensified by lens.
Red LED is standard, other colors are available.
- Coil is diode-suppressed
- DIN rail mounting
- UL and CE approvals, RoHS compliant

FEATURES

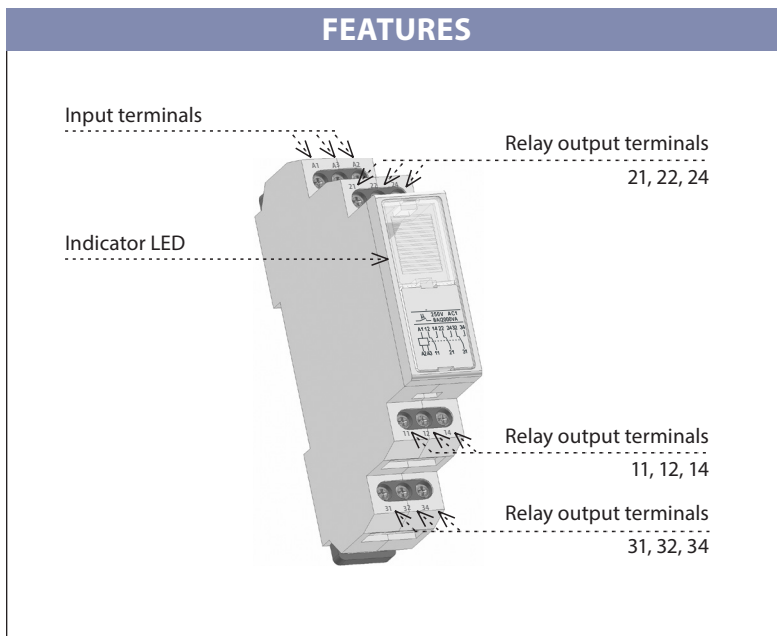

SPECIFICATIONS

- Input terminals** A1–A3
- Input voltage** 12–240VAC/VDC (50–60 Hz)
- Power Consumption (max)** . . AC 0.7–3VA / DC 0.5–1.7W
- Input voltage tolerance** . . . -15% to +10%
- Relay output form** 3PDT
- Rated current** 8Amps / AC
- Switching capacity** 2000 VA/ AC, 192 W/ DC
- Inrush current** 10A / < 3s
- Switching voltage (max)** . . . 250VAC / 24VDC
- Switching capacity DC (min)** 500mW
- Output indicator** Red LED standard,
other colors available
- Mechanical life** 30 million operations
- Electrical life (resistive)** . . . 70,000 operations
- Relay transfer** 10ms
- Operating temperature** . . . -20°C to +55°C
- Storage temperature** -30°C to +70°C
- Dielectric strength** 4 kV
- Operating position** any
- Mounting** DIN rail EN 60715
- Protection degree** IP 40 from front panel
- Wire size (max)** 14AWG
- Standards** EN 61811-1, EN 61010-1,
UL, CE, RoHS

WIRING DIAGRAM

