


Cable White print
 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C
 ---c AWM I/II A 80°C 30V FT1 USB CABLE

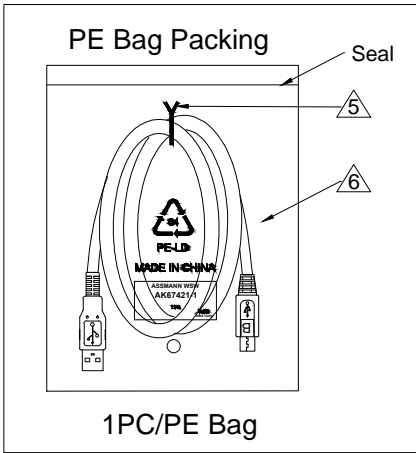

PIN ASSIGNMENT			
P1		P2	
1	Red	1	
2	White	2	
3	Green	3	
5	Black	4	
Shell	Drain+Braid	Shell	

WSW P/N	Jacket color	Length(mm)
AK67421-0.3	Black	300±15
AK67421-0.5	Black	500±15
AK67421-1	Black	1000±20
AK67421-2	Black	2000±20
AK67421-3	Black	3000±30
AK67421-5	Black	5000±50

Electrical test:
 1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 10Mohm min.
 4. Dielectric test: DC 300V

NO.	NAME.	Q'TY	SPECIFICATION
6	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
5	TIE	1	Black
4	Out Jacket	NA	Black PVC-45P
3	Cable	1	USB2.0 UL2725 (28#*1P+AL)+28#/2C+AEB Black OD:3.5mm
2	CONN	1	Micro USB 5P B Male Shell:Nickel Pin:G/F Insulator color: Black solder type
1	CONN	1	USB 2.0 A Male Shell:Nickel Pin:G/F Insulator color: White solder type

RoHS compliant
 Unit: mm

Scale	Free	⑤	Correct the USB A Male logo	13.12.2019	Winnie	Date	Name	Customer-No.
TOLERANCE		④	Update	13.07.2018	Xavier	Drawn	10.04.2013	Joanna
		③	Add 300mm	20.07.2016	Jesse	Approved	13.12.2019	Winnie
		②	Update drawing	12.04.2016	Amy			
DIM	TOL	①	Update drawing	25.08.2014	Joanna			Drawing-No.
		⑩	Drawn	10.04.2013	Joanna			ASS 7091 CA
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	1/1

AK67421-x



ASS 7091 CA rev05

Replace Sheet 1/1