THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES,
ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PART NO. **RFB-1716**

REV	DESCRIPTION	DWN	DATE	APPROVED
A	ENGINEERING RELEASE	CZS	3/24/98	R. RICE
B	REPLACE DIECAST MOLD	CZS	01/02/08	JDM

ALL DIMENSIONS ARE REFERENCE ONLY

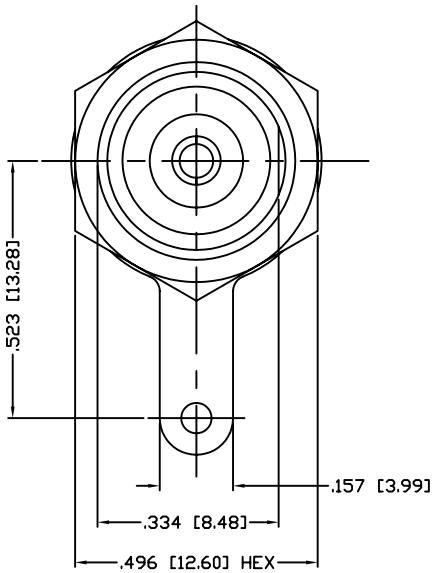

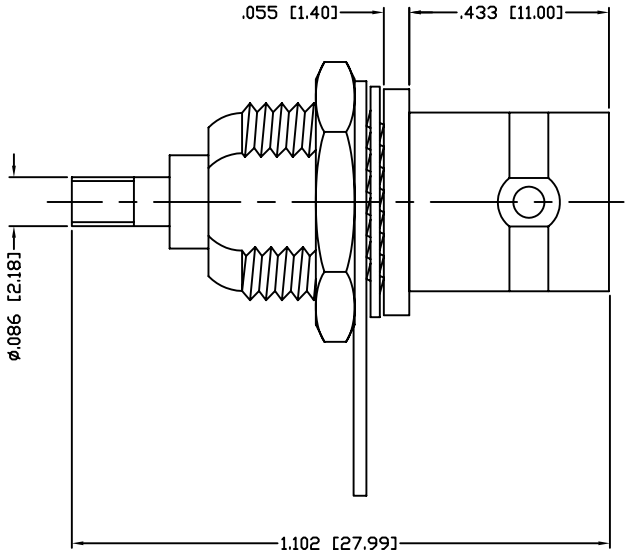

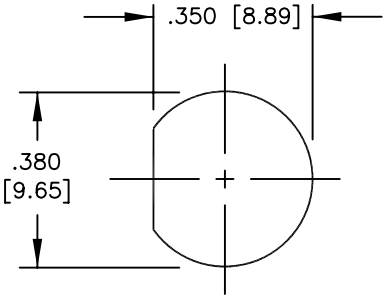

SUGGESTED MOUNTING CONFIGURATION

SPECIFICATIONS:

IMPEDANCE: 75 OHMS
VOLTAGE RATING: 500 VOLTS RMS
FREQUENCY RANGE: 0–1 GHz

#	DESCRIPTION	QTY	MATERIAL	FINISH
14				
13				
12				
11				
10				
9				
8				
7	HEX NUT	1	BRASS	NICKEL, 100µ"
6	SOLDER LUG	1	BRASS	NICKEL, 100µ"
5	LOCK WASHER	1	BRASS	NICKEL, 100µ"
4	PRESS FIT WASHER	1	BRASS	NICKEL, 100µ"
3	INSULATOR	1	DELRIN	---
2	CONTACT	1	BRASS	GOLD, 30µ"
1	BODY	1	ZINC DIECAST	NICKEL, 100µ"

000360

APPROVALS	DATE
DRAWN C. ZUNIGA	01/02/08
CHECKED	
ORJ DRAWN C. ZUNIGA	03/24/98

R o HS COMPLIANT

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]
UNLESS OTHERWISE NOTED TOLERANCES ARE:
DECIMALS | DIAMETER

RF connectors
DIVISION OF RF INDUSTRIES, LTD.
7610 MIRAMAR RD
SAN DIEGO, CA 92126
(858) 549-6340
(858) 549-6345 FAX

BNC JACK
BULKHEAD, FRONT MOUNT

SIZE	CABLE GROUP	DWG NO.	REV
A	N/A	RFB-1716	B

SCALE:	CAD FILE	SHEET
NTS	OUTLINE	1 OF 1