

4

3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
G	14	P	LTR	DESCRIPTION	DATE	DWN	APVD
		F1		REVISED PER ECO-15-015482	29OCT2015	NK	DR

**AMP**  
WIRE RANGE

---

6 AWG  
STRANDED

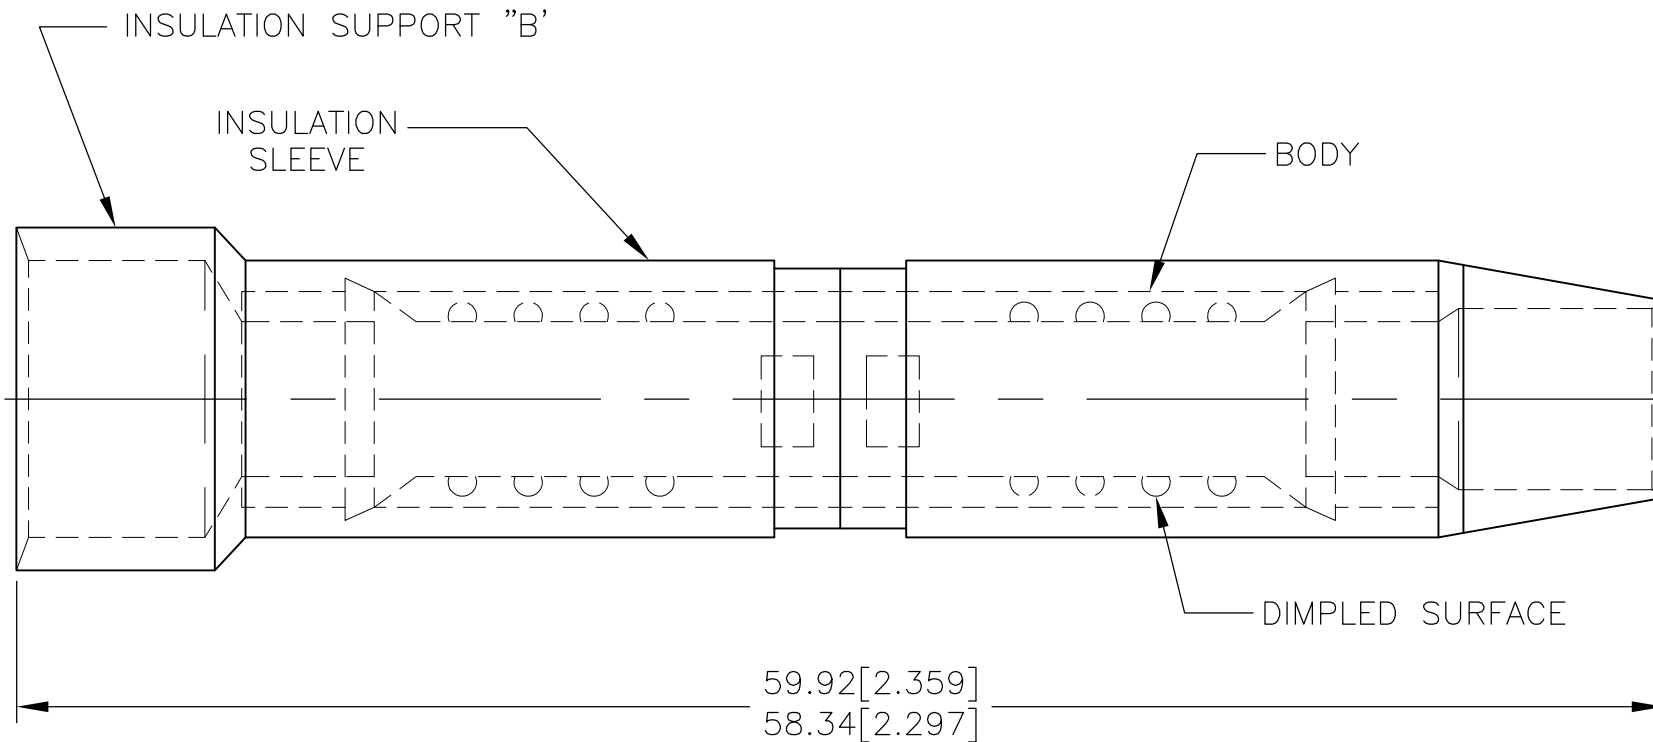

- 1 WIRE INSULATION DIA INSULATION SUPPORT "A" 7.87[.310] MAX.
- 2 WIRE INSULATION DIA INSULATION SUPPORT "B" 10.54[.415] MAX.

100	LOOSE PC	324621
QTY	PACKAGE TYPE	PART NO

<b>AMP INCORPORATED CUSTOMER SERVICE SYSTEMS</b>		MAX RECOMMENDED OPERATING TEMPERATURE: 105° C
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600 V MAX
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 10.54-16.77mm <sup>2</sup> [20,800-33,100] STRANDED
FOR ORDER ENTRY	1-800-526-5142	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.S. GOULDEN 8-30-93	<b>STE</b> TE Connectivity		
DIMENSIONS: mm[INCHES]		CHK R. HERSEY 8-30-93			
		APVD B. BARE 8-30-93	NAME SPLICE, BUTT, SINGLE TO MULTIPLE, TERMINYL, WIRE SIZE: 6 AWG		
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ANGLES ± -	PRODUCT SPEC -	SIZE A3	CAGE CODE 00779
MATERIAL COPPER PER ASTM B-152 NYLON, COLOR:BLUE	FINISH TIN PLATE PER ASTM B-545	WEIGHT -	RESTRICTED TO -		
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 1	REV F1