


OD9225 IP69K Series



DC Fans - 12, 24, 48V
92mm x 25mm (3.6" x 1.0")

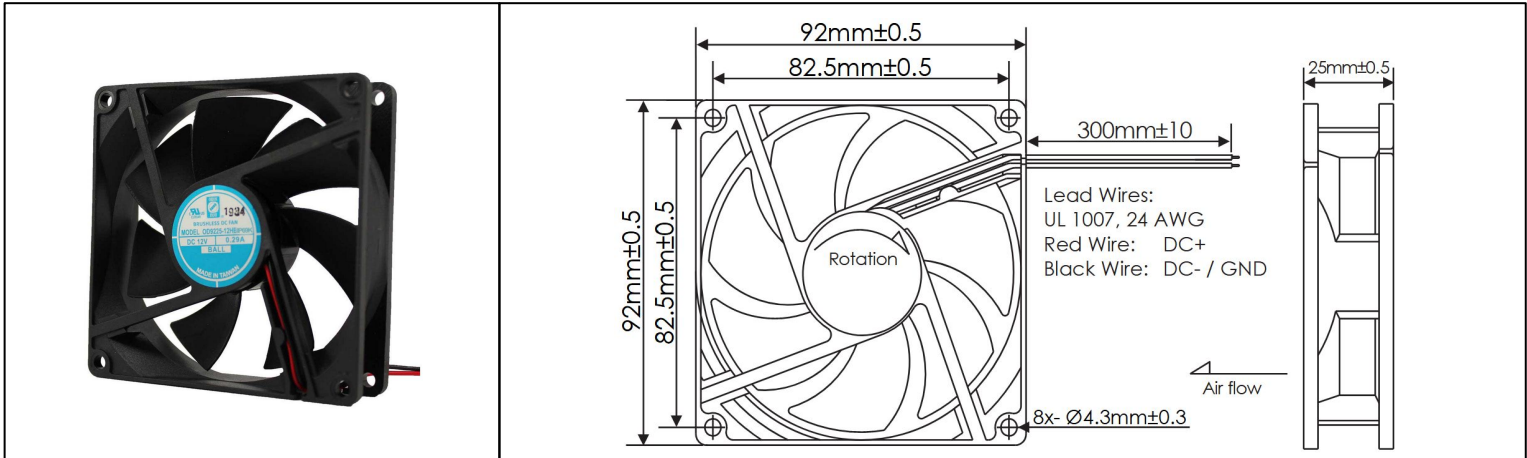

Frame	PBT, UL94 V-0 Plastic	Operating Temperature -20°C ~ +65°C Storage Temperature -20°C ~ +75°C Life Expectancy 70,000 Hours (L10 at 40°C) Available Options Tachometer Output Alarm Output PWM Speed Control Input Other IP Ratings Weight: 0.21 lbs	
Impeller	PBT, UL94 V-0 Plastic		
Connection	2x Lead Wires, 24 AWG		
Motor	Brushless DC, Auto Cutoff, Auto Restart, Polarity Protected, Electronically Protected, IP69K		
Bearing System	Ball Bearings		
Dielectric Strength	500VDC/min, <1mA		
Insulation Resistance	≥10M Ohm @ 500 VDC		

Part Number	Rated Voltage (Volts DC)	Voltage Range (Volts DC)	Input Power (Watts)	Rated Current (Amps)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OD9225-12HBIP69K	12	8 ~ 13.8	3.0	0.29	2900	49.8	35	0.24"
OD9225-24HBIP69K	24	15 ~ 26.4	3.5	0.18	2900	49.8	35	0.24"
OD9225-48HBIP69K	48	28 ~ 52.8	4.3	0.09	2900	49.8	35	0.24"