
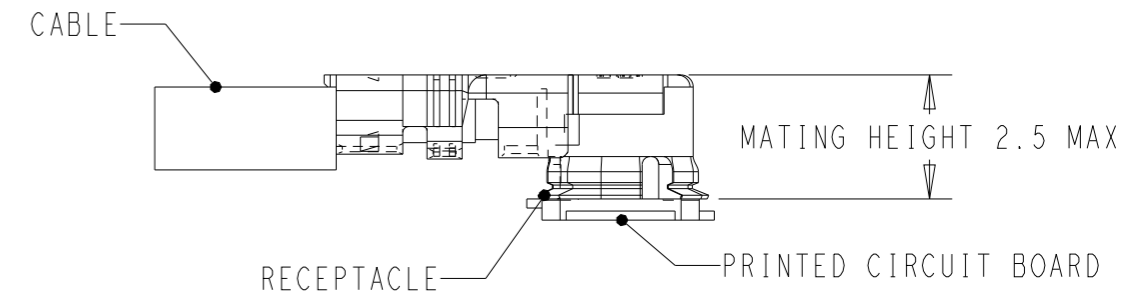


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL CREATED	24MAR2020	CL	RS
	A1	ECR-22-136185	18APR2022	JZ	WKH

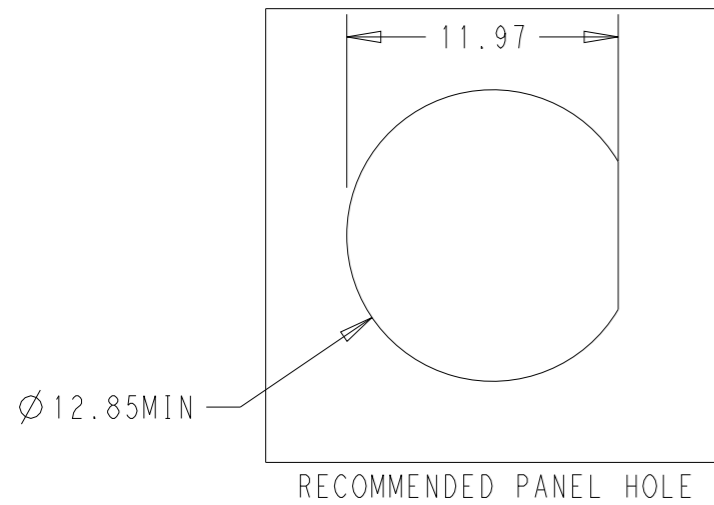

PART NUMBER	LENGTH
2016692-9	500±5
2016692-8	450±5
2016692-7	350±5
2016692-6	300±3
2016692-5	250±3
2016692-4	200±3
2016692-3	150±3
2016692-2	100±3
2016692-1	50+3

- NOTES:
- MATERIAL AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702
 - TNC BULKHEAD NEED ASSEMBLY NUT AND WASHER
 - PRODUCT RATING:
 TEMPERATURE: -45°C TO +85°C
 VOLTAGE: 30V (RMS)
 CHARACTERISTIC IMPEDANCE: 50 OHMS Normal
 FREQUENCY RANGE: DC TO 9GHz
 BEND RADIUS: 5MM MIN
 - CABLE ASSEMBLY TO BE 100% OPEN AND SHORT TESTED
 - TNC INTERFACE FOLLOW IEC 60169-17
 UMCC GEN1 CAN MATE WITH I-PEX MHF1 SERIES AND HIROSE U.FL SERIES
 - TNC CAN MEET IP67 AFTER INSTALL ON PANEL AND MATING ENVIRONMENT

PC	Q'TY	UNIT	DESCRIPTION	ITEM
	1		HEAT SHRINK TUBE	3
	0.5		RF CA,UMCC GEN1 BOTH END, WITH 1.37CABLE	2
	1		TNC BULKHEAD, FOR 1.37 CABLE	1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 04MAR2019 Cedar Liu

CHK 04MAR2019 Cedar Liu

APVD 24MAR2020 Roger Song

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

RF CA,TNC BULKHEAD TO UMCC GEN1 WITH 1.37CABLE

SIZE A3 CAGE CODE 00779 DRAWING NO C-2016692 RESTRICTED TO

SCALE 1:1 SHEET 1 OF 1 REV A1

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±-
1 PLC	±0.5
2 PLC	±0.13
3 PLC	±0.013
4 PLC	±0.0001
ANGLES	±-
MATERIAL	FINISH
-	-
-	-