

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E


F

F



Configuration:

DB25M

DB25F

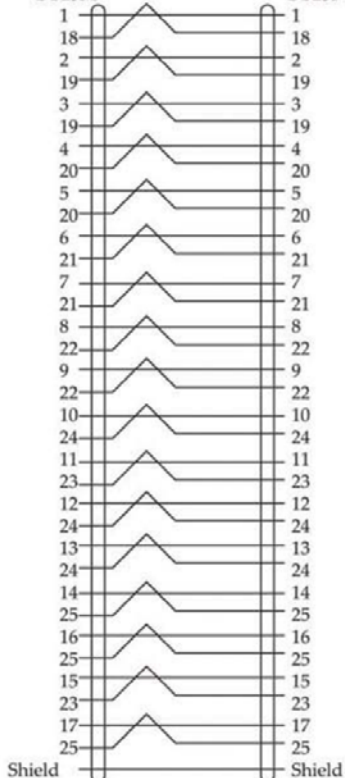

DB25 Male

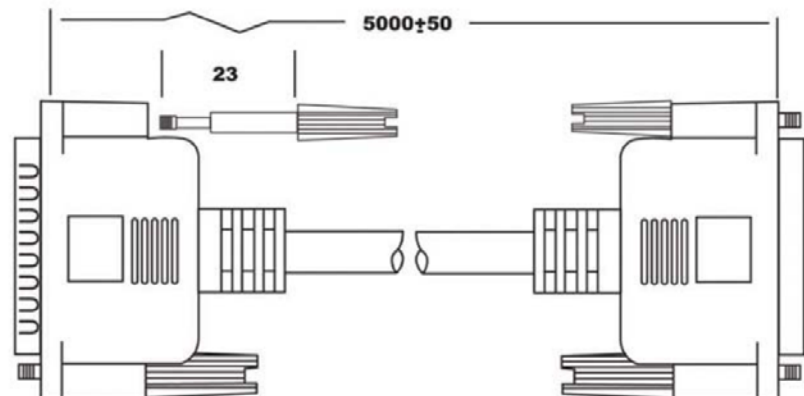

DB25 Female

**Material:**

- Cable: UL 20276 #28 18 P+1(#26)+AL/MY+85%Braid O.D:7.5
- Connector:DB25M, Blue
DB25F, Blue
- Thumbscrew: #4-40UNC, E23
- Copper Tape: 30X95

Notes:

1. Total Length: See Item No.
2. Color: Beige
3. Molded Type
4. 360°Solder

Scale	1:1							Name	Item No. AK733-1.8 (1.8 Meters) AK734-3 (3.0 Meters) AK735-5 (5.0 Meters)
TOLERANCE						Drawn	11.11.11	Chappell	
X.X	±0.40					Approved			
X.XX	±0.25								Title IEEE 1284 Bi-Directional Extension Cable, D-Sub 25 Pin Male to D-Sub 25 Pin Female
X.XXX	±0.15								
Angle	±3°								Drawing No.
									Replace



rev00

1

2

3

4

5

6

7

H

H