

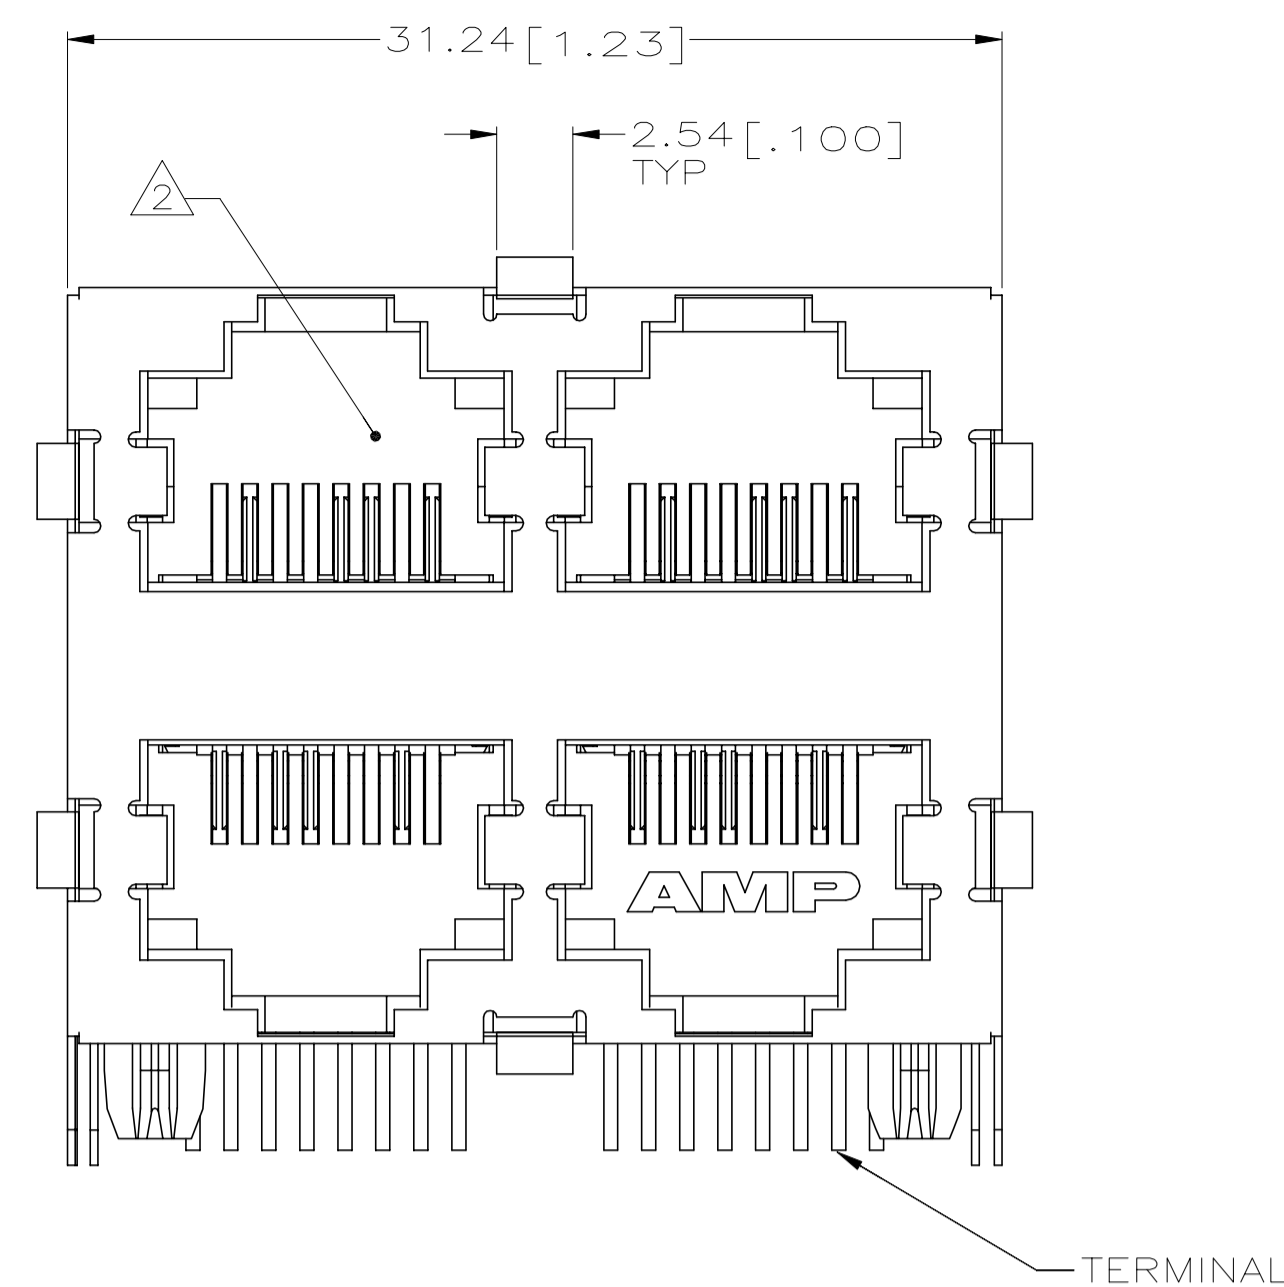
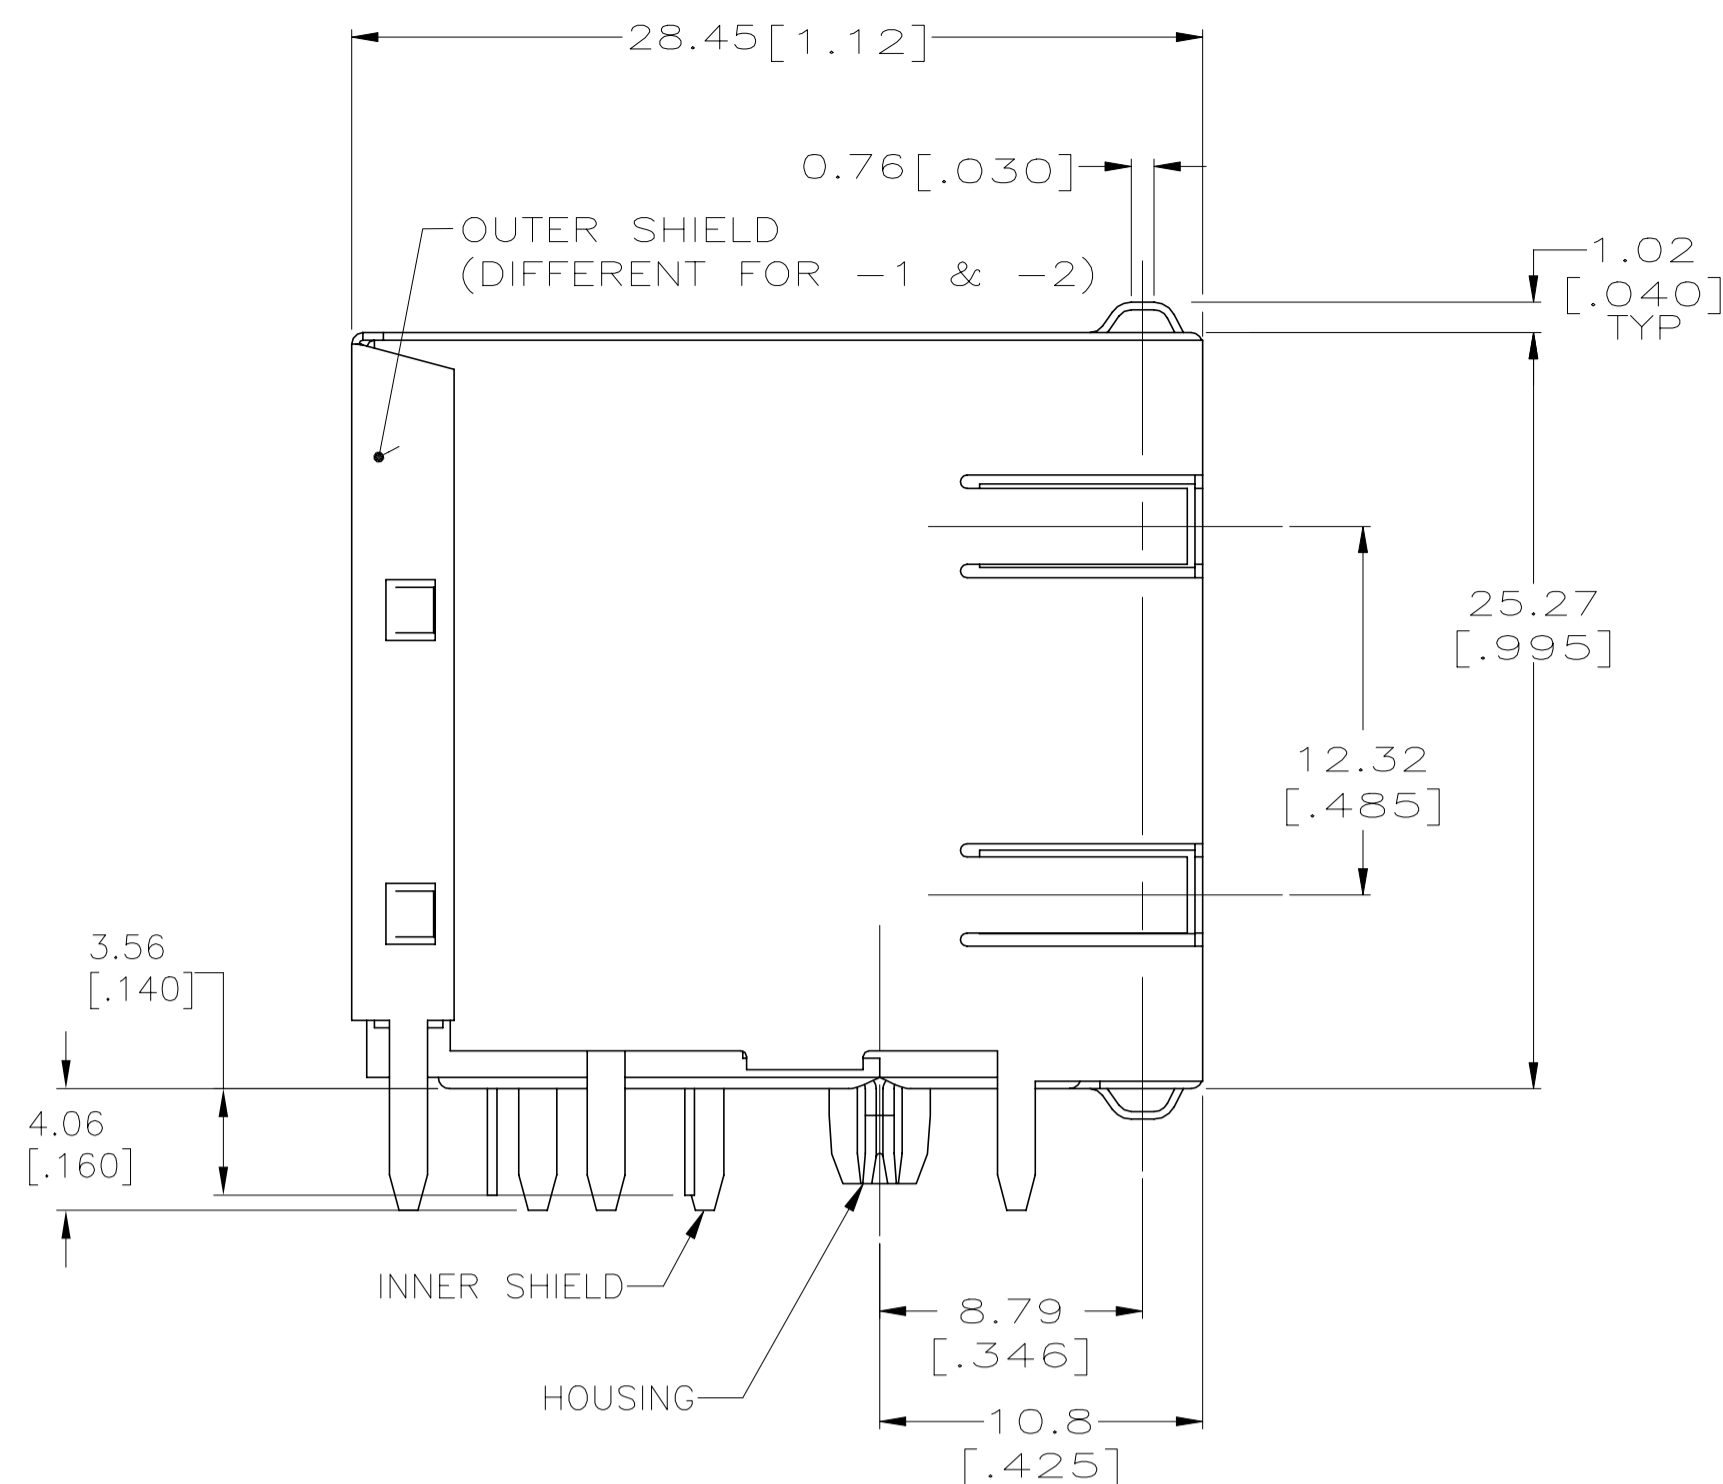
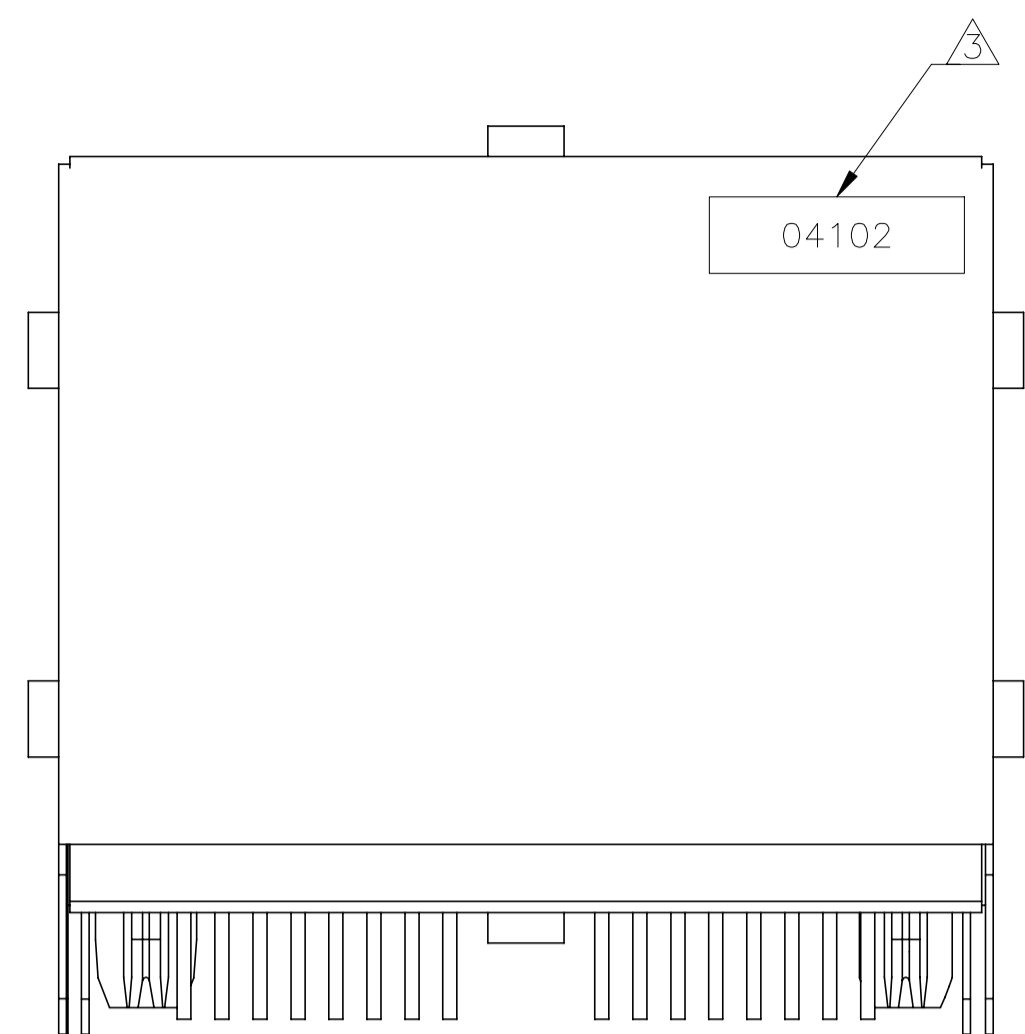



REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
D		REVISED PER ECO-21-000147	06JAN2021	AK WW

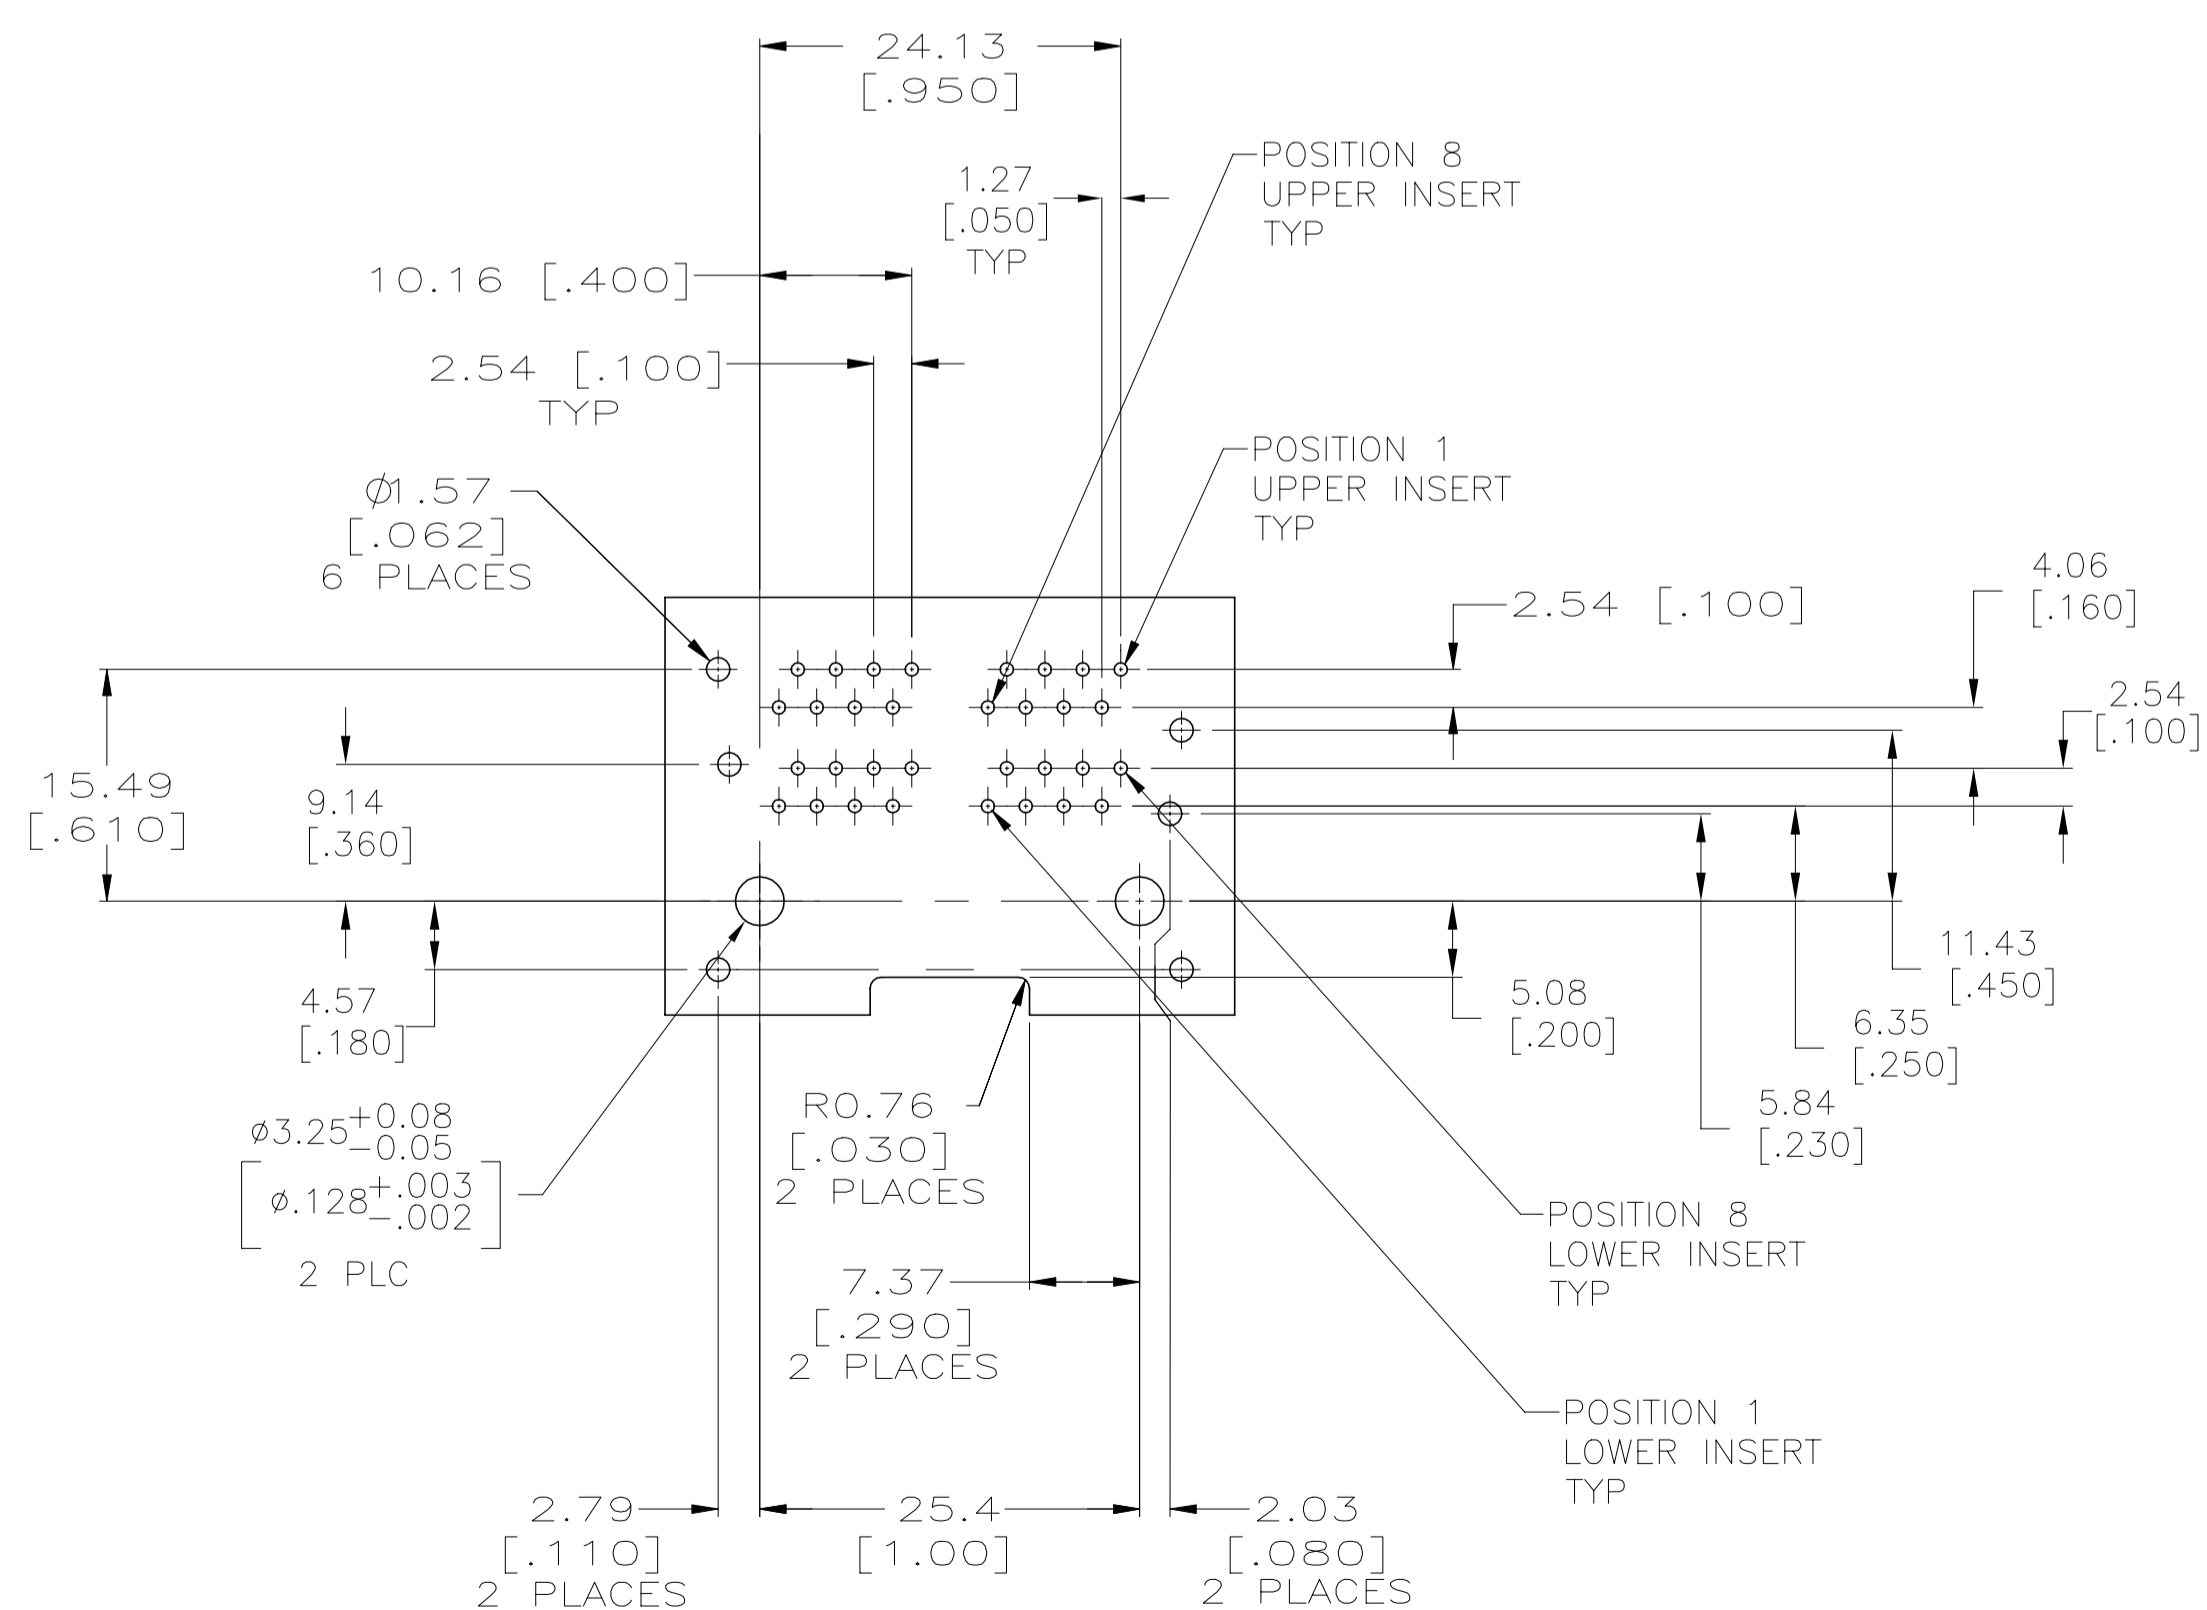

- MATERIAL:
HOUSING - PCT POLYESTER, BLACK, UL94V-0.
OVERMOLDED TERMINAL ARRAY - HIGH TEMPERATURE NYLON, COLOR: NATURAL
TERMINALS - 0.33 [.013] THICK PHOS BRONZE PLATED WITH 1.27um [.000050] MIN THICK HARD GOLD IN LOCALIZED AREA AND 3.81um [.000150] MIN THICK MATTE TIN IN SOLDER AREA OVER 1.27um [.000050] MIN THICK NICKEL UNDERPLATE.
INNER SHIELD - 0.25 [.010] THICK COPPER ALLOY PLATED WITH 2.03um [.000080] MIN BRIGHT TIN OVER 1.27um [.000050] MIN NICKEL.
OUTER SHELL - 0.25 [.010] THICK COPPER ALLOY PLATED WITH 1.27um [.000050] MIN NICKEL. PCB GROUND TABS DIPPED WITH 2.03um [.000080] MIN TIN
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.
- DATE CODE LOCATED ON REAR OF PART APPROXIMATELY AS SHOWN:
FIRST 2 DIGITS ARE LAST 2 DIGITS OF YEAR, SECOND 2 DIGITS ARE MANUFACTURING WORK WEEK, LAST DIGIT IS DAY OF WEEK, WITH SUNDAY = 1.
- PARTS PACKAGED IN SEALED BAGS WITH DESICCANT
- PARTS SUITABLE FOR LEAD FREE REFLOW PROCESSING TO 260° C

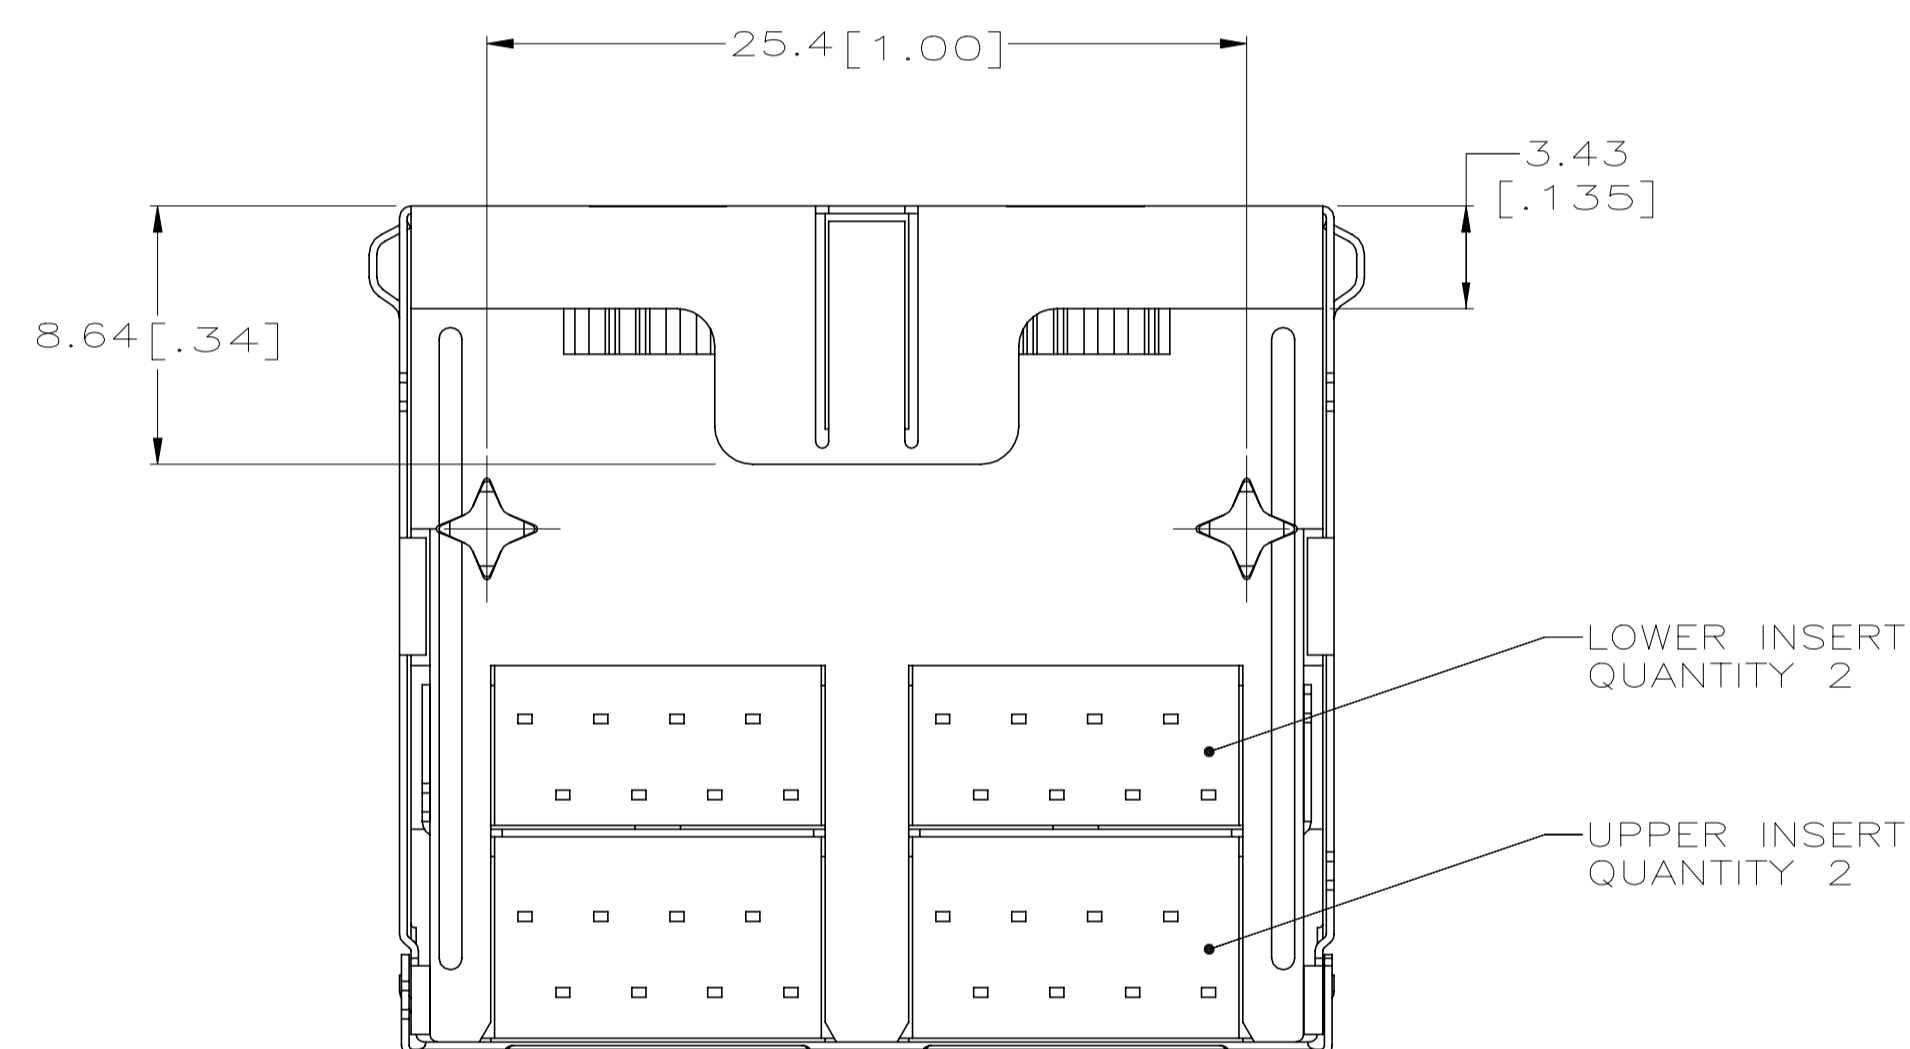

PC BOARD LAYOUT VIEWED FROM COMPONENT SIDE
SCALE 2:1

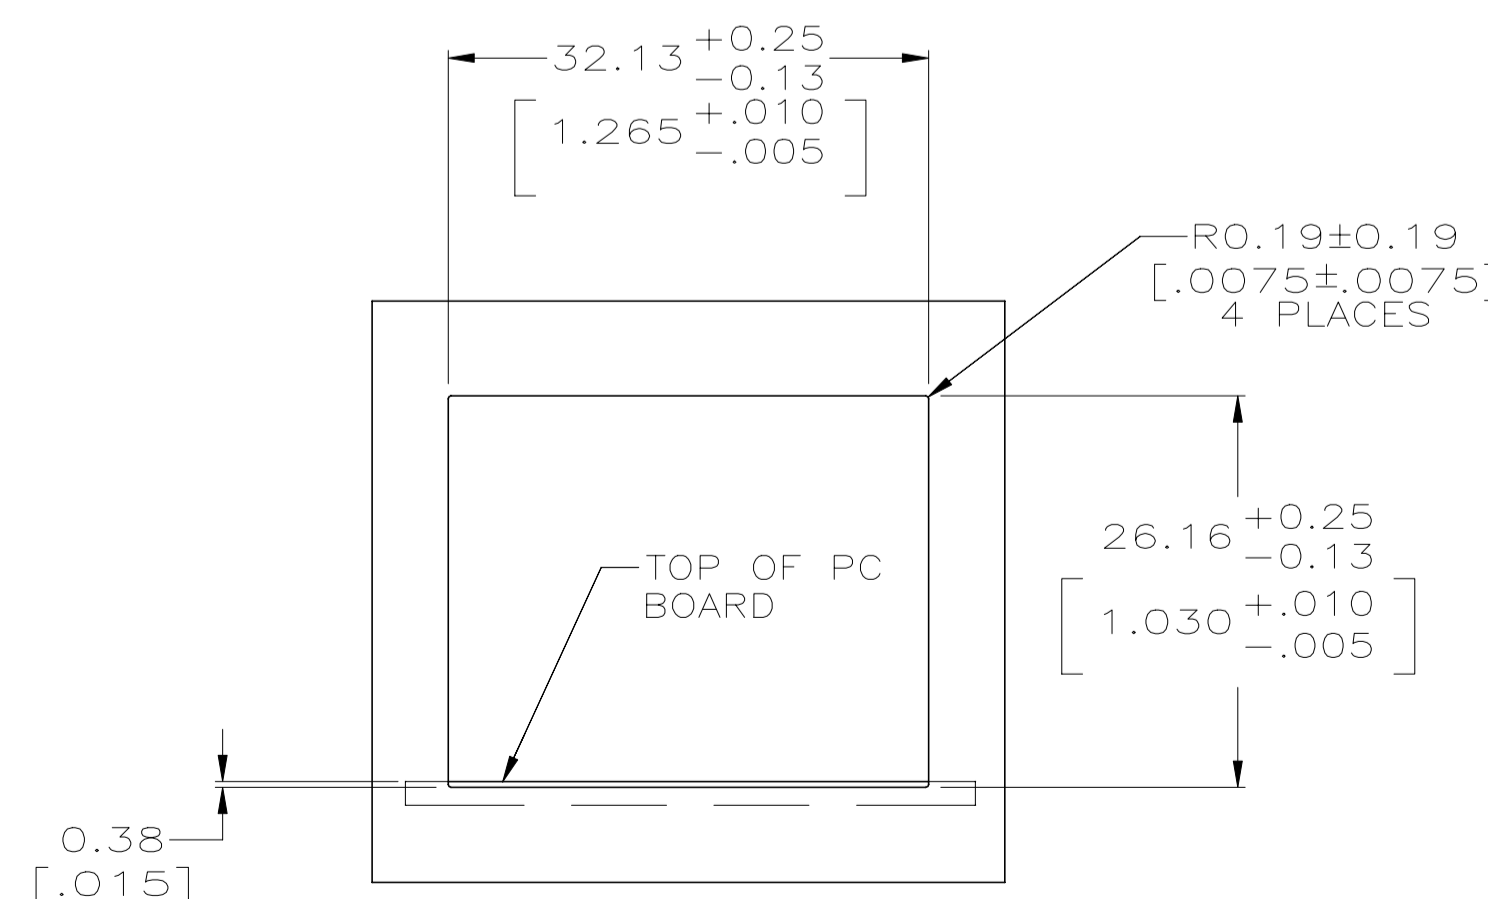

SUGGESTED PANEL CUTOUT DIMENSIONS
SCALE 2:1

2007104-2
2007104-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ/L.A.M. 07AUG2007		TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK J. WESTMAN 07AUG2007		NAME S. FLICKINGER 07AUG2007	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		PRODUCT SPEC	
0 PLC	±			APPLICATION SPEC	
1 PLC	±			114-2048	
2 PLC	± 0.25[.01]			WEIGHT 0.000000	
3 PLC	± 0.13[.005]			A1 00779 C=2007104	
4 PLC	±			CUSTOMER DRAWING	
ANGLES	±			SCALE 4:1 SHEET 1 OF 1 REV D	
MATERIAL	SEE NOTE 1	FINISH		SEE NOTE 1	