




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25MAR2015	DW	CW
	B	ECR-15-018270	08DEC2015	DW	CW
	BI	ECR-18-004560	27MAR2018	CH	CW
	C	ECR-21-111798	29SEP2021	WQR	CW

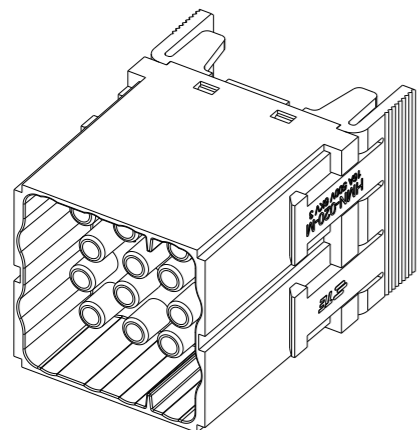

TYPE-1: T2111202101-000  
 类型-1: T2111202101-000

LASER PRINT MARKING, ARIAL FONT,  
 HEIGHT 2mm, LOCATION PER ACTUAL POSITION  
 激光打标, ARIAL 字体, 字高2mm, 位置按实际情况调整.

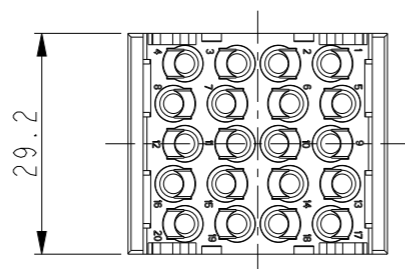




TYPE-3: T2111202101-B00,  
 THIS TYPE IS SAME AS TYPE-1,  
 ONLY ADD LASER PRINT MARKING "B"  
 类型-3: T2111202101-B00  
 此类型同类型-1, 只是增加了激光打标"B".

NOTES:


- TECHNICAL CHARACTERISTICS:  
 INSULATION MATERIAL: PC  
 RATED VOLTAGE: 500V  
 RATED CURRENT: 16A  
 INSULATION RESISTANCE:  $\geq 400M\Omega$   
 RATED IMPULSE VOLTAGE: 6KV  
 POLLUTION DEGREE: 3  
 FLAMMABILITY: UL94V-0  
 MATING CYCLES: 500 CYCLES  
 OPERATION TEMPERATURE:  $-40\sim+125^{\circ}C$   
 WIRE RANGE: 0.14~4.0 mm<sup>2</sup> (26~12 AWG)  
 CONTACT TYPE: CRIMP CONTACT
- CONTACT NEED TO BE ORDERED SEPARATELY.  
 (ORDER No. REFER TO DRAWING: T20300X10XX000)

注释:


- 技术参数:  
 绝缘材料: PC  
 额定电压: 500V  
 额定电流: 16A  
 绝缘电阻:  $\geq 400M\Omega$   
 额定脉冲电压: 6KV  
 污染等级: 3  
 阻燃等级: UL94V-0  
 插拔次数: 500次  
 工作温度:  $-40\sim+125^{\circ}C$   
 接线范围: 0.14~4.0 mm<sup>2</sup> (26~12 AWG)  
 接线类型: 冷压接
- 端子需要单独订购.  
 (订货号参考图面: T20300X10XX000)

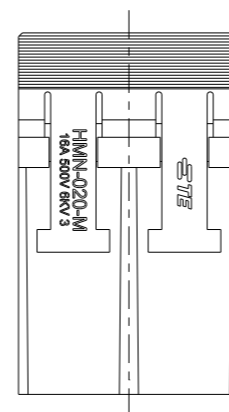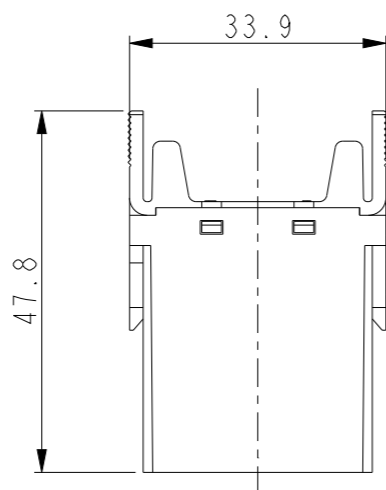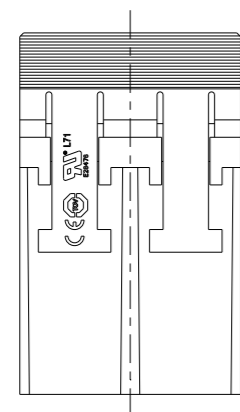


LASER PRINT MARKING, ARIAL FONT,  
 HEIGHT 2mm, LOCATION PER ACTUAL POSITION  
 激光打标, ARIAL 字体, 字高2mm, 位置按实际情况调整.



TYPE-2: T2111202101-A00,  
 THIS TYPE IS SAME AS TYPE-1,  
 ONLY ADD LASER PRINT MARKING "A"  
 类型-2: T2111202101-A00  
 此类型同类型-1, 只是增加了激光打标"A".



PART NUMBER 料号	PART DESCRIPTION 描述	TYPE 类型
T2111202101-B00	HMN-020-M HMN-020 MALE MODULE INSERT, MARK B HMN-020 模块公插, 打B标识	TYPE-3 类型-3
T2111202101-A00	HMN-020-M HMN-020 MALE MODULE INSERT, MARK A HMN-020 模块公插, 打A标识	TYPE-2 类型-2
T2111202101-000	HMN-020-M HMN-020 MALE MODULE INSERT HMN-020 模块公插	TYPE-1 类型-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25MAR2015 DAVID.WANG		 TE Connectivity NAME HMN-020-M	
DIMENSIONS: mm		CHK 25MAR2015 CHRIS.WANG			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25MAR2015 XIANG.XU			
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC 108-137063			
MATERIAL		APPLICATION SPEC 114-137063		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
-		WEIGHT		A3 00779 C-T2111202101000	
-		Customer Drawing		SCALE 1:1 SHEET 1 OF 1 REV C	