


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	See Table 1	SR Connector
2	UL1571, 30 AWG	Black
<u>Electrical Specifications</u>		
Current: 0.7A DC		
Voltage: 50V DC		

TABLE 1				
ITEM	NUMBER OF CIRCUITS	CONNECTOR PART NO.	ASSEMBLY PART NO.	TOTAL WIRE REQUIRED
1	2	02SR-3S	A02SR02SR30K203A	421 mm
1	3	03SR-3S	A03SR03SR30K203A	631 mm
1	4	04SR-3S	A04SR04SR30K203A	842 mm
1	5	05SR-3S	A05SR05SR30K203A	1,052 mm
1	6	06SR-3S	A06SR06SR30K203A	1,262 mm
1	7	07SR-3S	A07SR07SR30K203A	1,473 mm
1	8	08SR-3S	A08SR08SR30K203A	1,683 mm
1	9	09SR-3S	A09SR09SR30K203A	1,894 mm
1	10	10SR-3S	A10SR10SR30K203A	2,104 mm
1	11	11SR-3S	A11SR11SR30K203A	2,314 mm
1	12	12SR-3S	A12SR12SR30K203A	2,525 mm
1	13	13SR-3S	A13SR13SR30K203A	2,735 mm
1	14	14SR-3S	A14SR14SR30K203A	2,946 mm

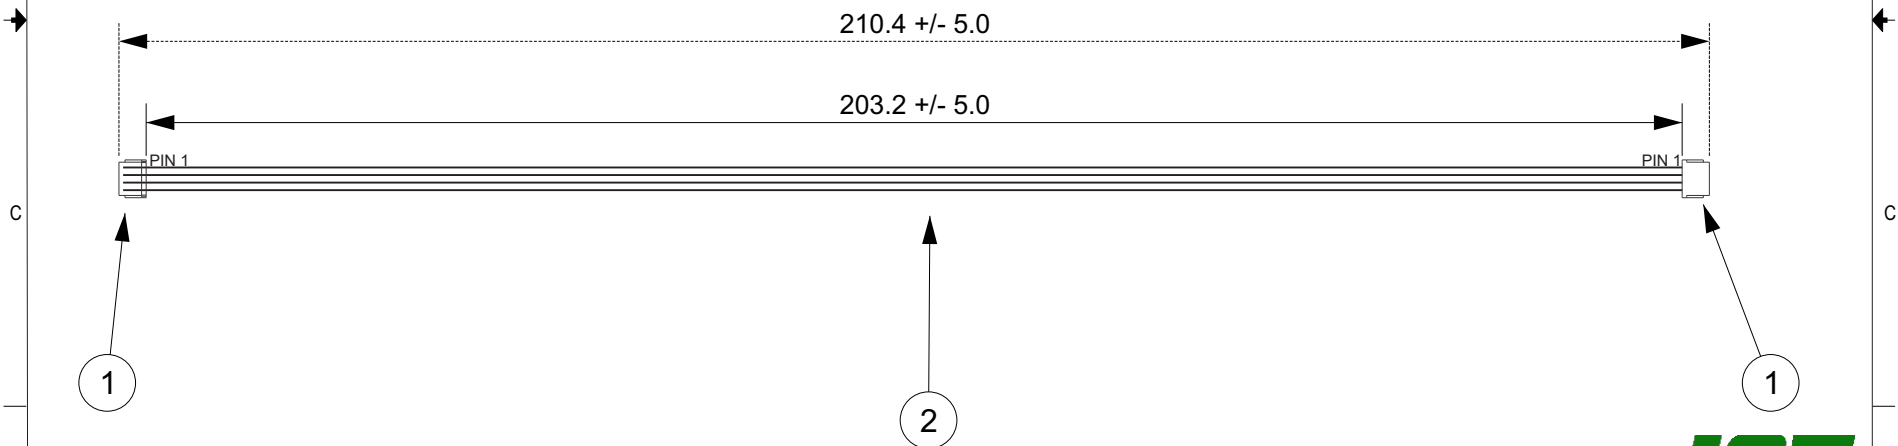

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME		
		DESCRIPTION		
		1.0mm Pitch SR Standard Catalog Assembly - 8" Overall Length - Pin Out: 1 to 1		
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE	SEE TABLE 1		
	1:1	DRAWING NO. GAM-288	DATE 4/10/2018	

ZONE	REV	DESCRIPTION	DATE	APPROVED
1	1	Add Electrical Specifications	6/29/2018	LM