




Elastische Einpresszone 2.5 mm / compliant pressfit zone 2.5 mm
 Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles
 Bauart 2 / type 2
 Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisiertem Loch siehe Zeichnung 164062 Nr.:6
 hole design see ERNI-specification 164062 No.:6

- 1) 1.0 +0.09 -0.06 Durchmesser des metallisierten Loches
 1.0 +0.09 -0.06 Diameter of finished plated- through hole

Bestückungsplan / contact layout

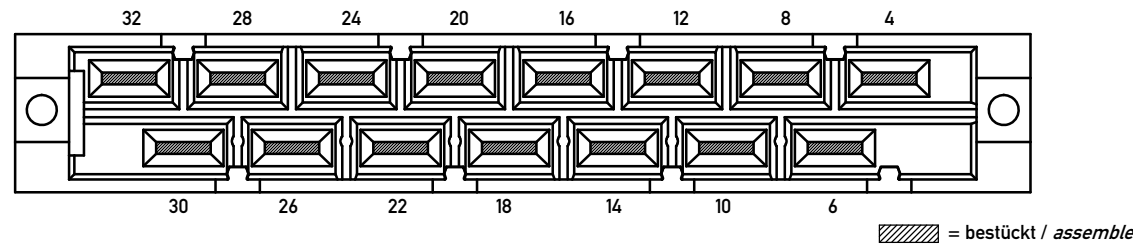

Leiterplatten-Layout / PCB-drillhole pattern

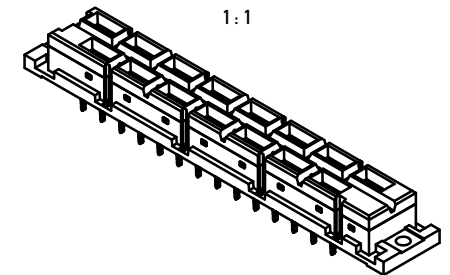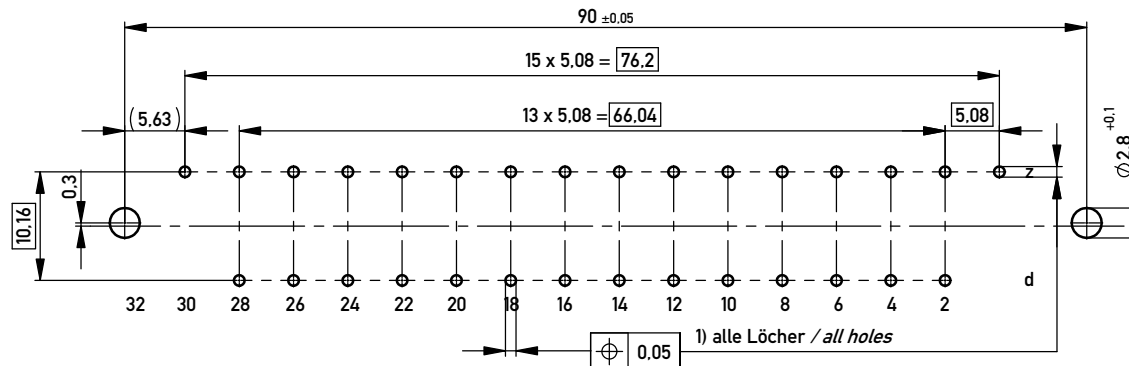

Information:		Tolerances		Scale	2:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
f		01.07.2016		Federleiste H15 EE Fem. Connector H15 Pressfit	
Index		Date			
www.ERNI.com		www.ERNI.com		594752	
Class		STVH15		I A3	

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.