

6

5

4

3






2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/1/17	

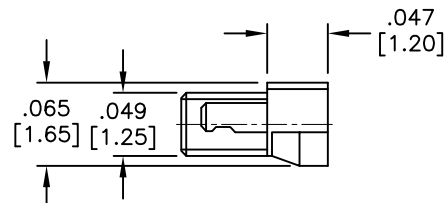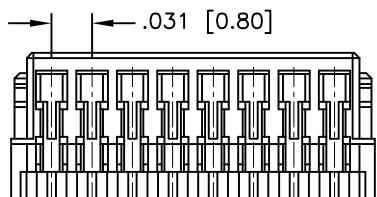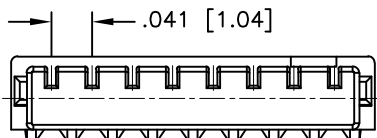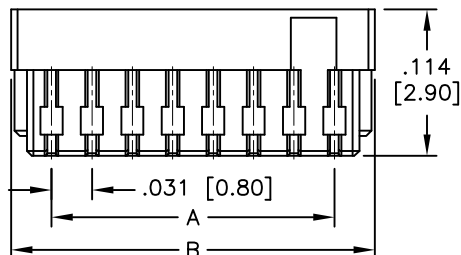

SPECIFICATIONS:

Material:
 Insulator: Polyamide, rated UL 94V-0,
 Insulator color: Natural
 Contacts: Copper Alloy
 Plating:
 Gold flash over Nickel underplate overall
 Electrical:
 Voltage rating: 30V DC
 Current rating: 0.5A AC/DC (32 Awg wire)
 0.2A AC/DC (36 Awg wire)
 Contact resistance: 20 mohms max
 Insulation resistance: 100MΩ min
 Dielectric withstanding voltage: 200V AC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant



Positions: 02 thru 20, 22

A = .031 [0.80] x No. of Spaces

B = .031 [0.80] x No. of Spaces + .063 [1.60]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	∅.X	± .10
.XX	± .020	∅.XX	± .015
.XXX	± .015	∅.XXX	± .010

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
0.8mm HOUSING IDC TYPE, GOLD PLATED

APPROVALS		DATE
DRAWN	AY	11/1/17
CHECKED	RC1	11/1/17
APPROVED		

SIZE X	PART NO. 08CH-A-XX-G-IDC	REV. -
REF: S00015T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1