


1363.2

BKA 2,5/18 b.B. BG

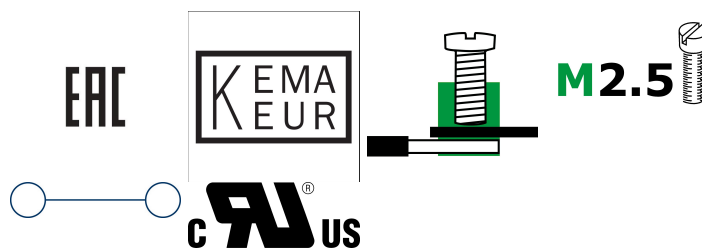

Feed-through terminal for direct mount, Screw connection, Mounting type: Mounting surface, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Beige

## Business data

|  |  |
|--|--|
| Packaging unit                             | 20                                     |
| Quantity unit                              | PC                                     |
| Weight per piece (not including packaging) | 66 g                                   |
| Weight per piece (including packaging)     | 69.75 g                                |
| Unit of weight                             | G                                      |
| Customs number                             | 85369010                               |
| Country of origin                          | DE                                     |
| Product description                        | Feed-through terminal for direct mount |

1363.2

BKA 2,5/18 b.B. BG

---

## Technical data

---

### Dimensions

---

|                                       |          |
|---------------------------------------|----------|
| Length                                | 106.2 mm |
| Height                                | 23 mm    |
| Hole spacing (mid-point to mid-point) | 99.1 mm  |
| Pitch                                 | 5 mm     |

---

### Ratings

---

|   |                     |
|---|---------------------|
| Rated voltage                                   | 400 V               |
| Rated current                                   | 24 A                |
| Rated cross-section                             | 2.5 mm <sup>2</sup> |
| Rated impulse voltage                           | 6 kV                |
| Overvoltage category                            | III                 |
| Contamination degree                            | 3                   |
| Maximum power dissipation for nominal condition | 0.77 W              |

---

1363.2

BKA 2,5/18 b.B. BG

## Technical data

### Connection data

|  |                     |
|--|---------------------|
| Connection principle                                     | Screw connection    |
| Connection position                                      | Lateral             |
| Connections  | 36                  |
| Number of terminals per level                            | 2                   |
| Number of levels   | 1                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 4 mm <sup>2</sup>   |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 4 mm <sup>2</sup>   |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm <sup>2</sup> |
| Wire cross-section AWG, min.                             | 22                  |
| Wire cross-section AWG, max.                             | 12                  |
| Stripping length   | 7 mm                |
| Screw head   | Slotted             |
| Screw threading  | M 2,5               |
| Tightening torque, min.                                  | 0.4 Nm              |
| Tightening torque, max.                                  | 0.8 Nm              |

### Materials

|                           |               |
|---------------------------|---------------|
| Insulation housing        | Polyamide 6.6 |
| Flammability class UL 94  | V-2           |
| Working temperature, min. | -40 °C        |
| Working temperature, max. | 105 °C        |

### Further technical data

|                                |               |
|--------------------------------|---------------|
| Mounting type                  | Mounting face |
| Gauge plug acc. to EN 60 947-1 | A3            |
| End plate required             | ✓             |

### Print

|        |       |
|--------|-------|
| Colour | Beige |
|--------|-------|

# Data sheet



1363.2

BKA 2,5/18 b.B. BG

---

## Technical data

---

### Environmental Product Compliance

---

|                                |            |
|--------------------------------|------------|
| REACH Conform                  | yes        |
| REACH Reference date           | 2021-07-08 |
| REACH Candidate Substance Note | No         |
| RoHS Conform                   | yes        |

---

1363.2

BKA 2,5/18 b.B. BG

## Approvals

### Standards and regulations

|                      |                |
|----------------------|----------------|
| EAC approval         | TR ZU 004/2011 |
| EAC approval granted | yes            |

### cUL Recognized

|  |              |
|--|--------------|
| cUL approval   | C22.2 No 158 |
| cUL Usegroup B: rated voltage                        | 300 V        |
| cUL Usegroup B: rated current                        | 20 A         |
| cUL Usegroup C: rated voltage                        | 300 V        |
| cUL Usegroup C: rated current                        | 20 A         |
| cUL wire cross-section single-core (rigid) AWG, min. | 22           |
| cUL wire cross-section single-core (rigid) AWG, max. | 12           |
| cUL wire cross-section stranded AWG, min.            | 22           |
| cUL wire cross-section stranded AWG, max.            | 12           |
| cUL torque   | 5.3 Nm       |
| cUL wire material                                    | Cu           |
| cUL Recognized                                       | yes          |

### KEMA KEUR approval

|   |                     |
|---|---------------------|
| KEMA KEUR approval                                | EN 60947-7-1:2009   |
| KEMA KEUR approval granted                        | yes                 |
| KEMA rated voltage                                | 400 V               |
| KEMA rated current                                | 24 A                |
| KEMA rated impulse voltage                        | 6 kV                |
| KEMA wire cross-section single core (rigid), min. | 0.2 mm <sup>2</sup> |
| KEMA wire cross-section single-core (rigid), max. | 4 mm <sup>2</sup>   |
| KEMA wire cross-section stranded, min.            | 0.2 mm <sup>2</sup> |
| KEMA wire cross-section stranded, max.            | 4 mm <sup>2</sup>   |
| KEMA torque, min.                                 | 0.4 Nm              |
| KEMA torque, max.                                 | 0.8 Nm              |

---

### Approvals

---

#### UL Recognized

---

|   |           |
|---|-----------|
| UL approval   | UL 1059   |
| UL Usegroup B: rated voltage                        | 300 V     |
| UL Usegroup B: rated current                        | 20 A      |
| UL Usegroup C: rated voltage                        | 300 V     |
| UL Usegroup C: rated current                        | 20 A      |
| UL wire cross-section single-core (rigid) AWG, min. | 22        |
| UL wire cross-section single-core (rigid) AWG, max. | 12        |
| UL wire cross-section stranded AWG, min.            | 22        |
| UL wire cross-section stranded AWG, max.            | 12        |
| UL torque   | 5.3 Lb In |
| UL wire material                                    | Cu        |
| UL factory wiring                                   | yes       |
| UL field wiring                                     | yes       |
| UL Recognized                                       | yes       |


---

---


Media

---

**EAC**

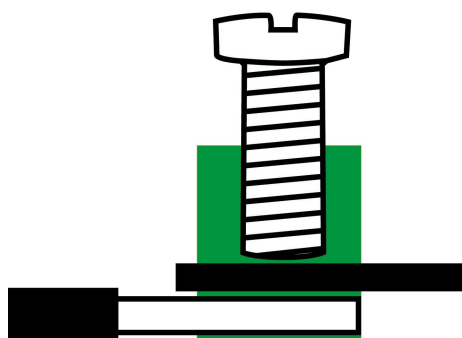

**M2.5**

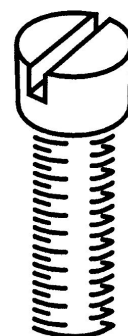

**C  US**

# Data sheet

1363.2

BKA 2,5/18 b.B. BG



---

## Accessories

---



1363.2

BKA 2,5/18 b.B. BG

## Insulated external cross-connector



External insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.1 mm, Rated current: 27 A; Colour: Yellow

### General order data

| Product number: | Article name   | GTIN (EAN)    | Packaging unit |
|-----------------|----------------|---------------|----------------|
| 2045.0          | AQI 10/5/11 YE | 4044211048501 | 500 ST         |



External insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 14.36 mm, Rated current: 27 A; Colour: Yellow

### General order data

| Product number: | Article name  | GTIN (EAN)    | Packaging unit |
|-----------------|---------------|---------------|----------------|
| 2033.0          | AQI 3/5/11 YE | 4044211048358 | 500 ST         |



External insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.26 mm, Rated current: 27 A; Colour: Yellow

### General order data

| Product number: | Article name  | GTIN (EAN)    | Packaging unit |
|-----------------|---------------|---------------|----------------|
| 2032.0          | AQI 2/5/11 YE | 4044211048341 | 500 ST         |


1363.2

BKA 2,5/18 b.B. BG

---

## Insulated external cross-connector

---



External insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 19.46 mm, Rated current: 27 A; Colour: Yellow

---

### General order data


| Product number: | Article name  | GTIN (EAN)    | Packaging unit |
|-----------------|---------------|---------------|----------------|
| 2044.0          | AQI 4/5/11 YE | 4044211048495 | 500 ST         |

---

---

## Quick marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

---

### General order data

| Product number: | Article name   | GTIN (EAN)    | Packaging unit |
|-----------------|----------------|---------------|----------------|
| 4600.7          | PMC SB 5/50 WH | 4044211088903 | 500 ST         |

---

1363.2

BKA 2,5/18 b.B. BG

---

## Screwdriver

---



Screwdriver with bare blade, Colour: Black-grey

---

### General order data

| Product number: | Article name | GTIN (EAN)    | Packaging unit |
|-----------------|--------------|---------------|----------------|
| 1085.0          | SDB 0,5x3,0  | 4044211014643 | 500 ST         |

---