

4






3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2001
 © COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | | DIST | | REVISIONS | | |
|-----|-----|-----------------------|--|-----------|------|------|
| P | LTR | DESCRIPTION | | DATE | DWN | APVD |
| | C1 | REVISED ECR-16-017382 | | 11APR2017 | J. J | W. H |

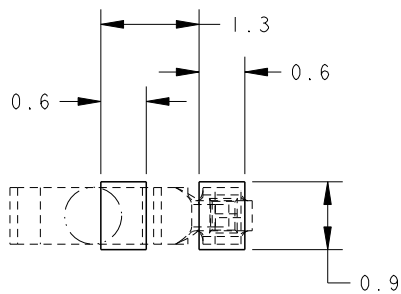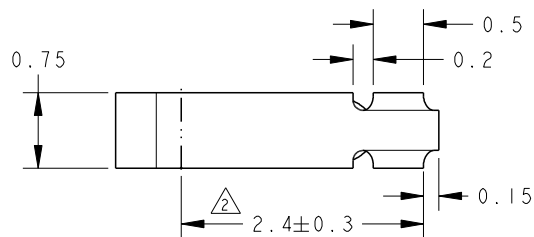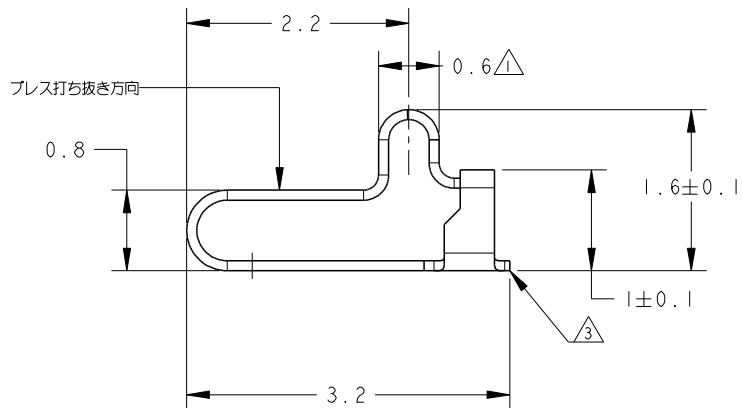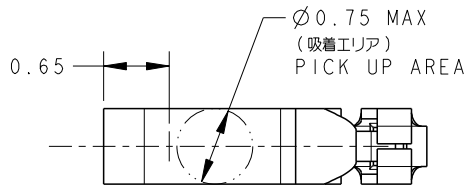

参考パッド寸法
SCALE 15:1

- △1 めっき仕様 (材料めっき)
Ni UNDER PLATING: 0.8μm MIN
CONTACT POINT; Au 0.25~0.50μm
SOLDERING AREA; Au 0.05μm MIN
- △2 カットバリ: 0.05 MAX,
- △3 その他全周バリ: 0.03 MAX
- 4 ドライバック およびベーキングは不用のこと

- △1 FINISH (PLATED MATERIAL)
Ni UNDER PLATING: 0.8μm MIN
CONTACT POINT; Au 0.25~0.50μm
SOLDERING AREA; Au 0.05μm MIN
- △2 CUTTING BURR: 0.05 MAX,
- △3 CIRCUMFERENCE BURRS: 0.03 MAX
- 4 DISUSED PACKAGING MATERIAL: DRYPACK AND BAKING PROCESS
- 5 PART NUMBER : 1565322-1

| | | | | | |
|--|--|---------------------|-------------------|---|---------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. | | DWN | 23AUG2001 | Tyco Electronics Corporation Kawasaki, Japan | |
| DIMENSIONS: 単位: 丸 mm | | CHK | 23AUG2001 | SHIELD FINGER 1608 | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD | 23AUG2001 | NAME | K. KODAIRA |
| 一般公差 | | PRODUCT SPEC | 108-5786 | APPLICATION SPEC | 108-5786 |
| 0 PLC ±0.2 | | WEIGHT | A300779 C=1565322 | | |
| 1 PLC ±0.2 | | RESTRICTED CUSTOMER | SCALE | 20:1 | SHEET 1 OF 2 REV C1 |
| 2 PLC ±0.2 | | SEE NOTE | | | |
| 3 PLC ±0.2 | | | | | |
| 4 PLC ±0.2 | | | | | |
| FINISH 仕上 | | | | | |
| MATERIAL 材料 | | | | | |

4



3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2001
© COPYRIGHT 2001 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| J | | SEE SHEET 1 | - | - | - |
| | | | | | |
| | | | | | |

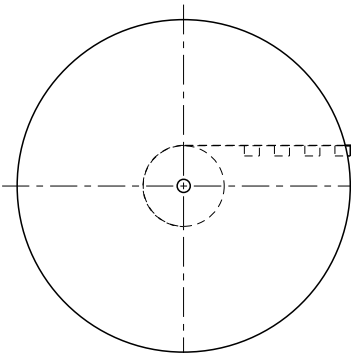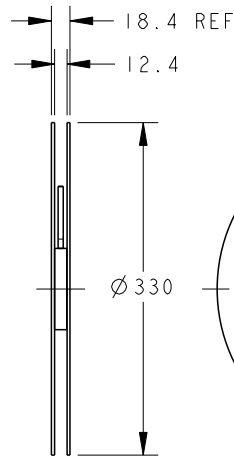

PEELING ANGLE: 165°~180°
剥離強度
PEELING FORCE: 0.1N~1.0N
WEEDING THE COVER TAPE: 300 MIN
(INCLUDED EMPTINESS POCKET)

トレーラ部 160mm MIN WITHOUT CHARGE
製品装填部 欠品無きこと WITH PRODUCT CHARGE NO STOCK-OUT IN POCKET 5,000EA/REEL
キャリアテープ空部: 400mm以上 WITHOUT CHARGE

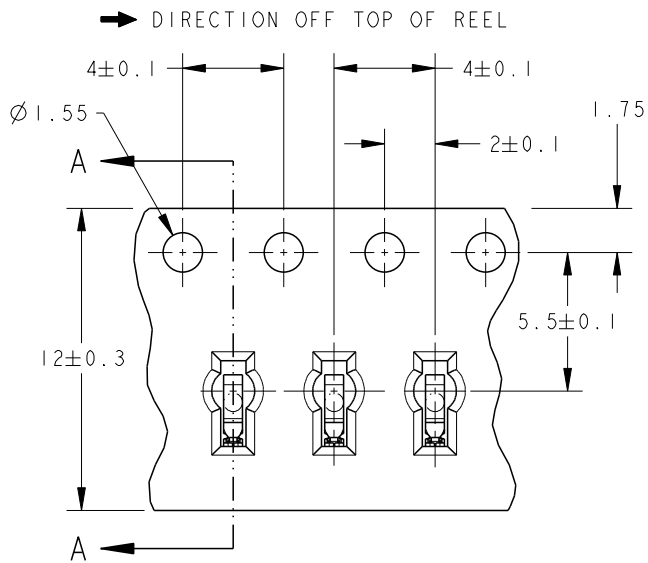

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE, AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

| | |
|-------------------|--|
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ±0.2 ANGLES ±2° |
| MATERIAL | FINISH |

| | | | |
|------------------|--|-----------------|--------------------------------|
| DWN | Tyco Electronics Tyco Electronics Corporation Kawasaki, Japan | | |
| CHK | NAME SHIELD FINGER 1608 | | |
| APVD | SIZE A3 | CAGE CODE 00779 | DRAWING NO C=1565322 |
| PRODUCT SPEC | RESTRICTED TO | | |
| APPLICATION SPEC | RESTRICTED CUSTOMER | | SCALE 20:1 SHEET 2 OF 2 REV C1 |
| WEIGHT | | | |