
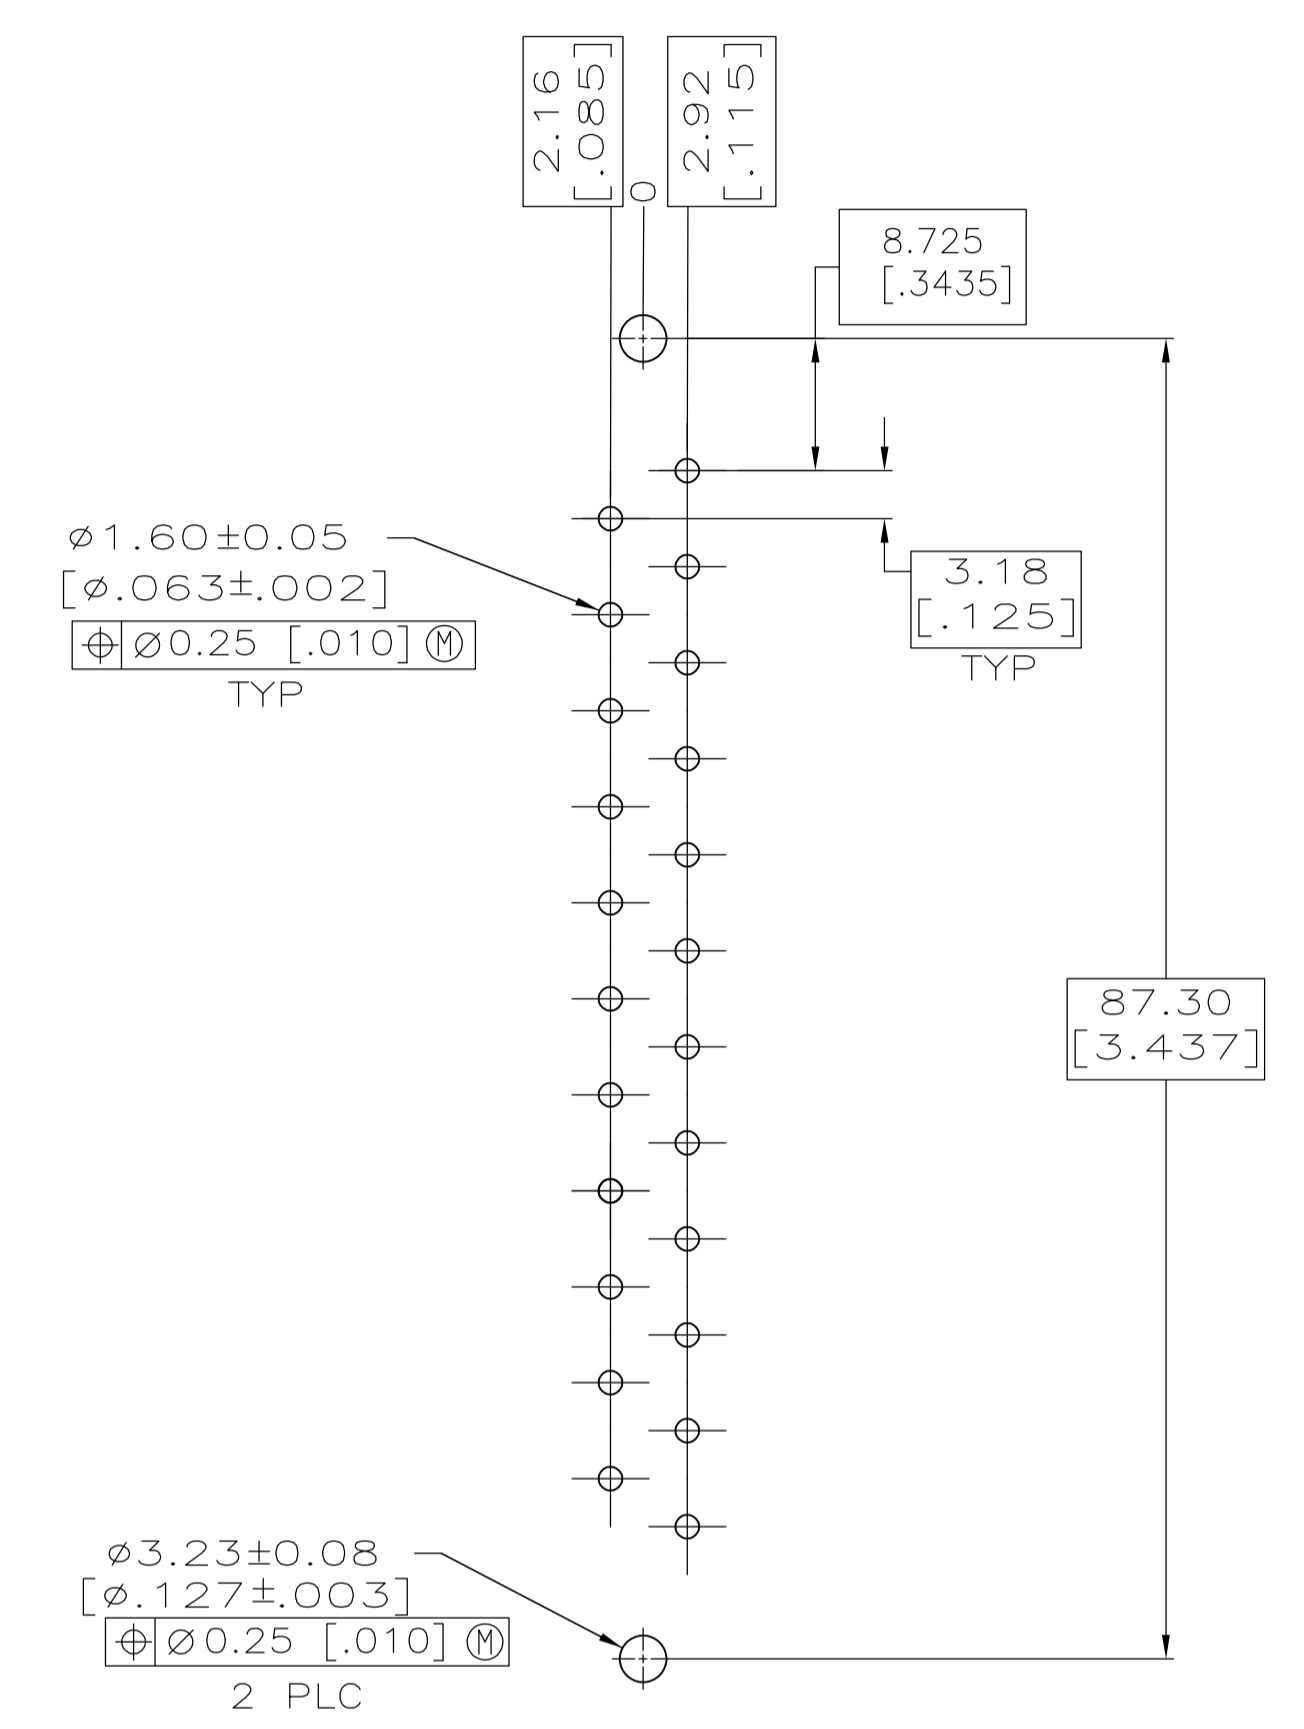


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
C		REVISED PER 003B-0197-05	4/25/05	SS	GS
C1		REVISED PER ECO-09-020689	25AUG09	KK	AEG
C2		REVISED PER ECO-17-005912	22JUL2017	RS	MZ

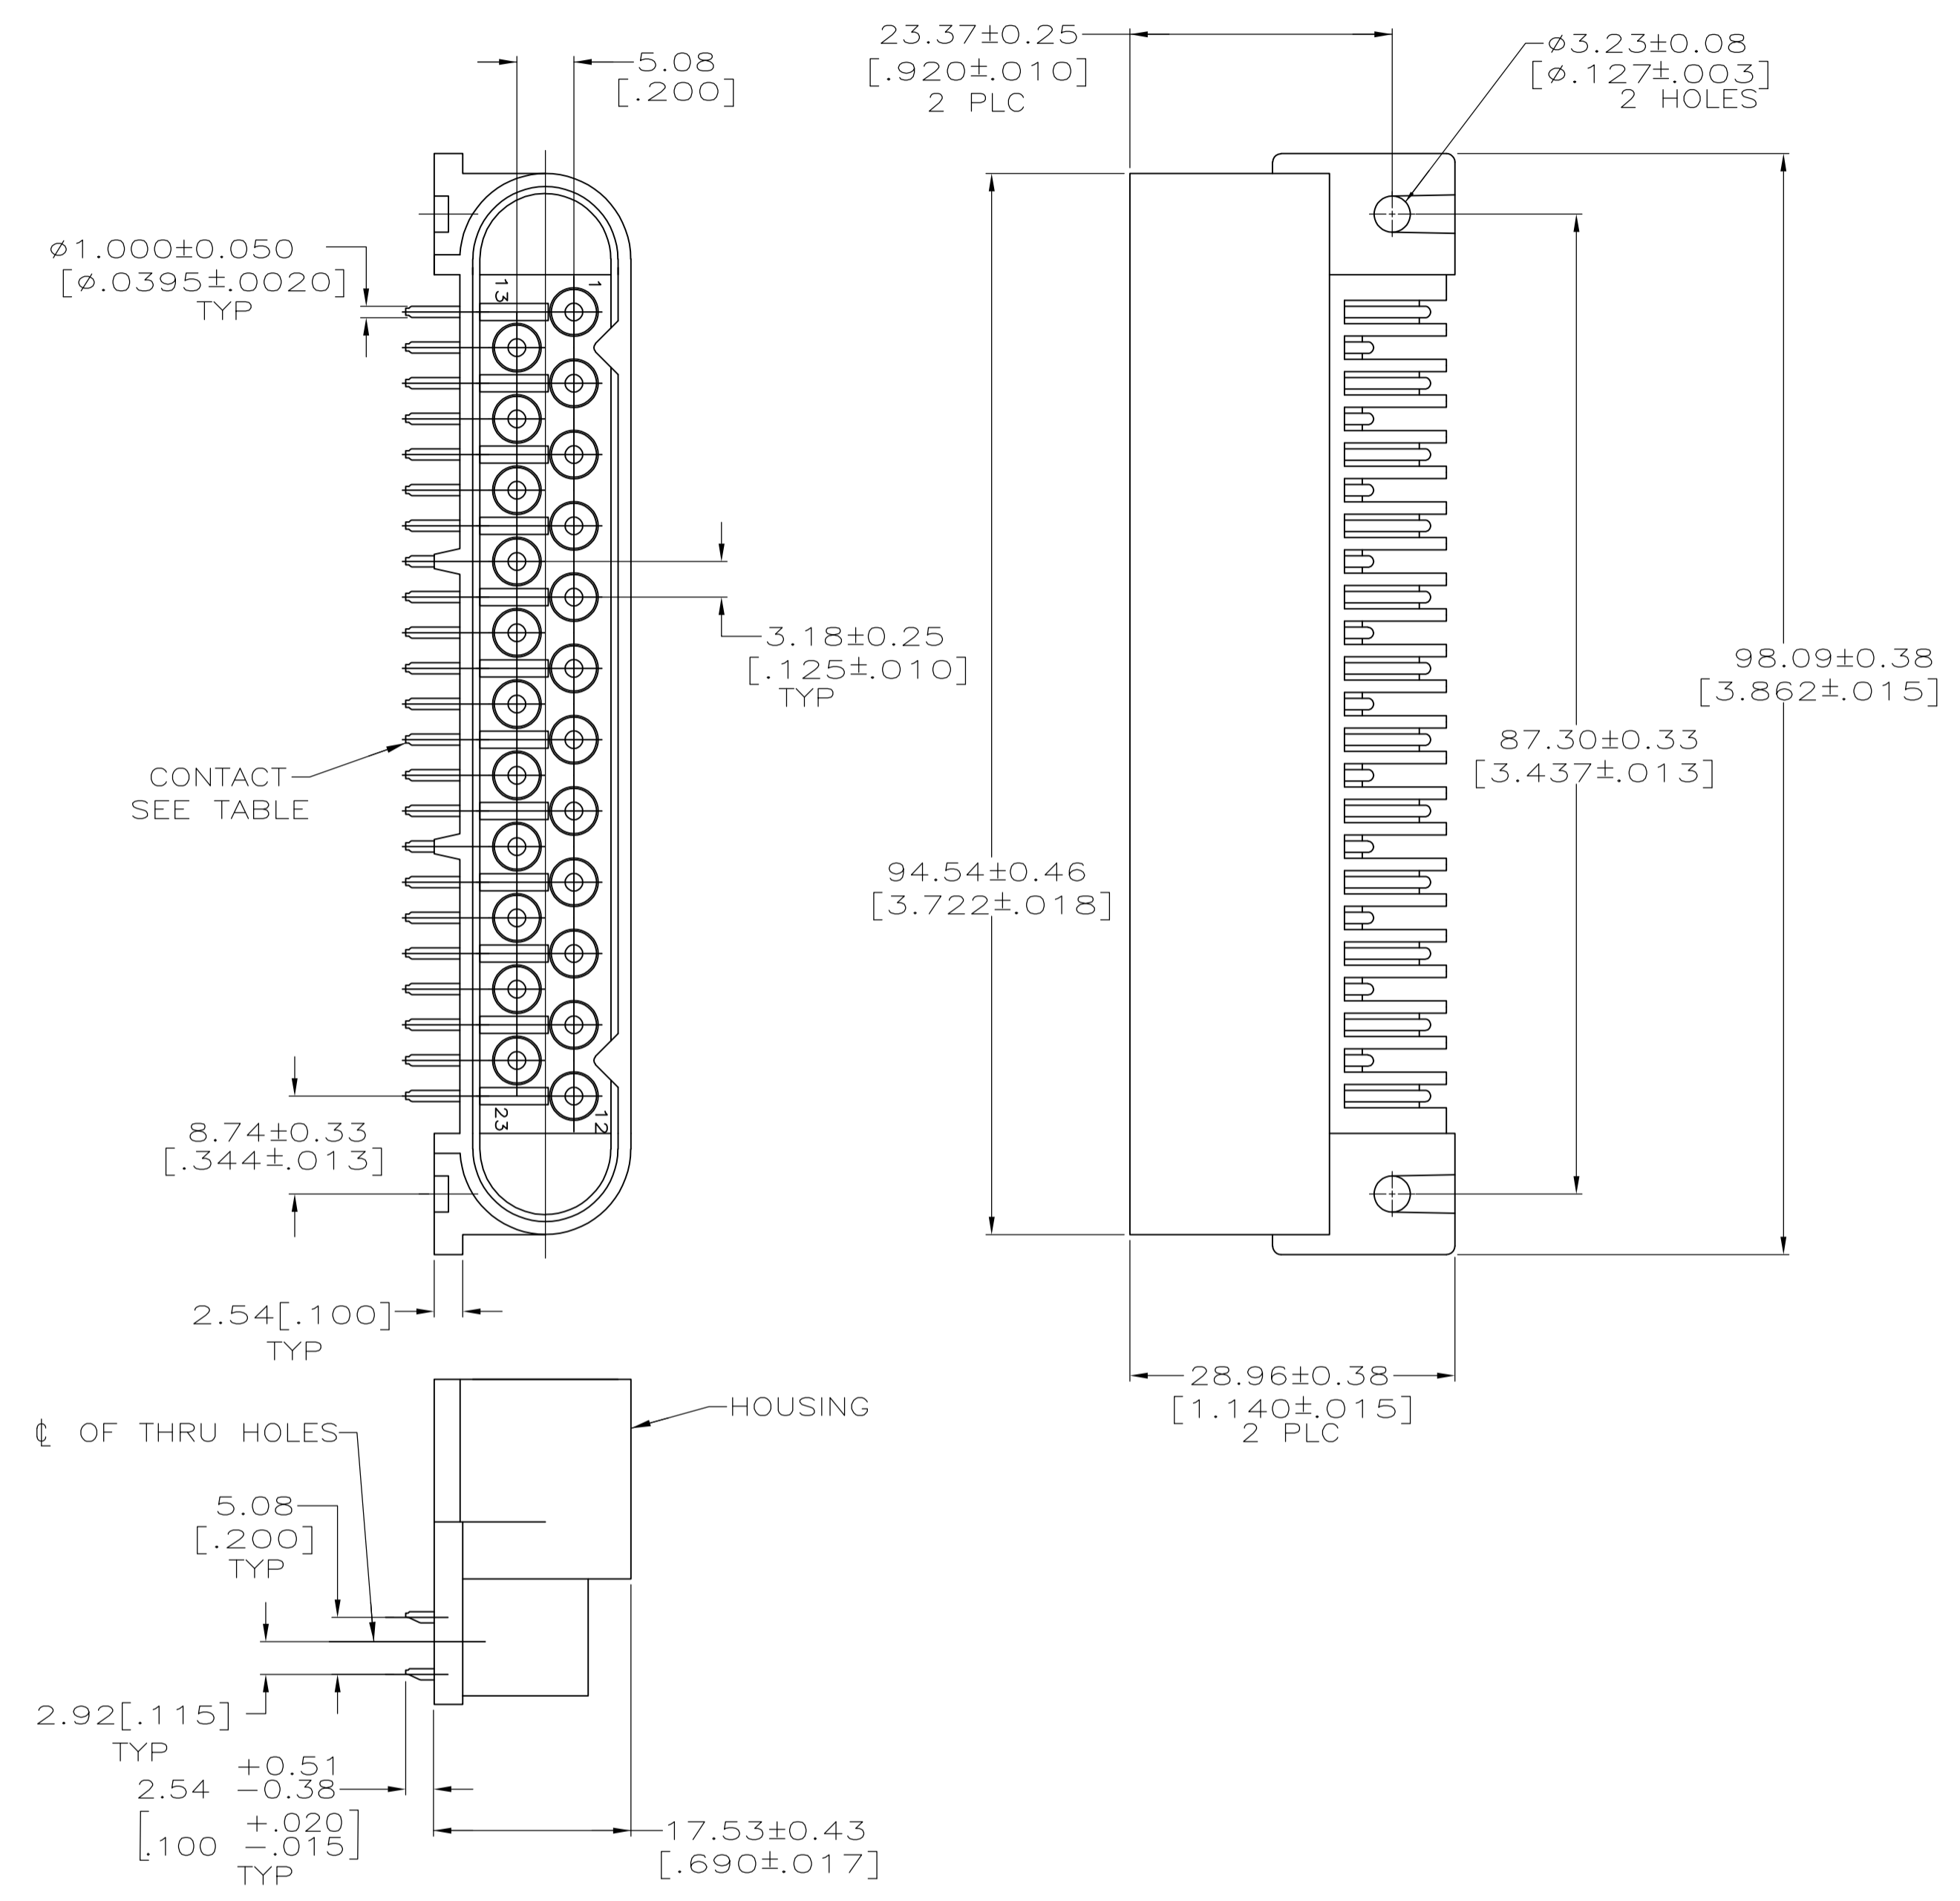

- 1 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATHING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 2.16 [.085] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL ON ENTIRE CONTACT.
- 2 0.76um [.000030] MIN GOLD OVER 1.27um [.000050] MIN NICKEL.
- 3 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATHING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 2.16 [.085] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL ON ENTIRE CONTACT.
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	2	3	POSITIONS 10 AND 21	POSITIONS 18 AND 20	POSITIONS 1 THRU 9, 11 THRU 17,19,22,23	213768-6
OBSOLETE	2	3	POSITION 23	NONE	POSITIONS 1 THRU 22	213768-5
	2	3	NONE	NONE	ALL POSITIONS	213768-4
OBSOLETE	2	1	POSITIONS 10 AND 21	POSITIONS 18 AND 20	POSITIONS 1 THRU 9, 11 THRU 17,19,22,23	213768-3
OBSOLETE	2	1	POSITION 23	NONE	POSITIONS 1 THRU 22	213768-2
OBSOLETE	2	1	NONE	NONE	ALL POSITIONS	213768-1
			GROUND CONTACT FINISH	SIGNAL CONTACT FINISH	EMPTY CIRCUITS	GROUND CONTACTS
						SIGNAL CONTACTS
						PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN: W. LENKER 11/02/92
CHK: J. McCLINTON 11-16-92

APVD: J. McCLINTON

NAME: PIN HEADER ASSEMBLY, 23 POSITION, RIGHT ANGLE, METRIMATE

PRODUCT SPEC: -
APPLICATION SPEC: -

SIZE: A1
CAGE CODE: 00779
DRAWING NO: 213768

RESTRICTED TO: -

CUSTOMER DRAWING

SCALE: 2:1
SHEET: 1 OF 1
REV: C2