




TOP VIEW

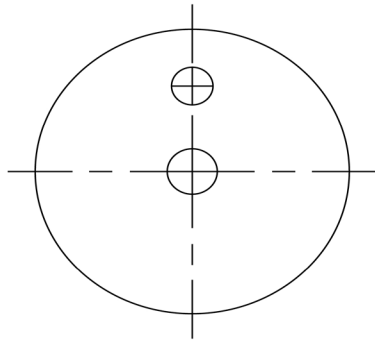


SIDE VIEW

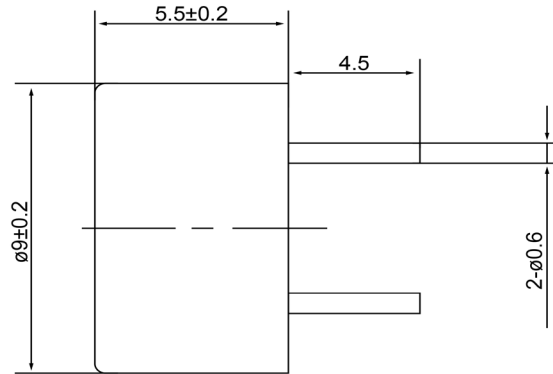

BOTTOM VIEW

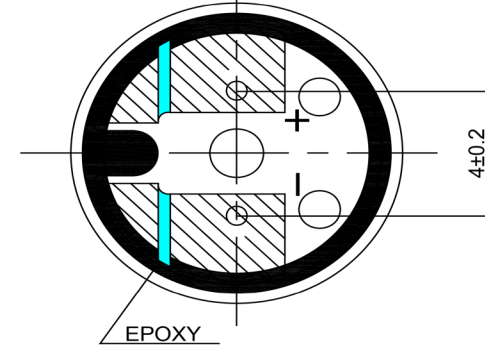

Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description	Date	Approved			
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS 	1	Released from Engineering	10/21/2013	J.S			
Resonant Frequency	2,731	(Hz)								
Rated Voltage	3	(V)								
SPL @ 10cm	85	(dBA)								
Coil Resistance	25	(ohm)								
Mount Type	Thru-hole									
Voltage Range	2 ~ 4	(V)								
Max Rated Current	60	(mA)								
Housing Material	PBT									
Operating Temperature	-30 ~ +70	°C								
Storage Temperature	-40 ~ +85	°C								
Weight	1	(g)								
				<b>Electro-Mechanical Transducer</b>		<b>TE092703-6</b>				
				<b>DB UNLIMITED</b>	<b>Drawn by</b> A.B.	<b>Date</b> 10/21/2013	<b>Checked by</b> C.E.	<b>Date</b> 10/21/2013	<b>Approved by</b> J.S	<b>Date</b> 10/21/2013