



SUPERSEDED BY 15 2024-1

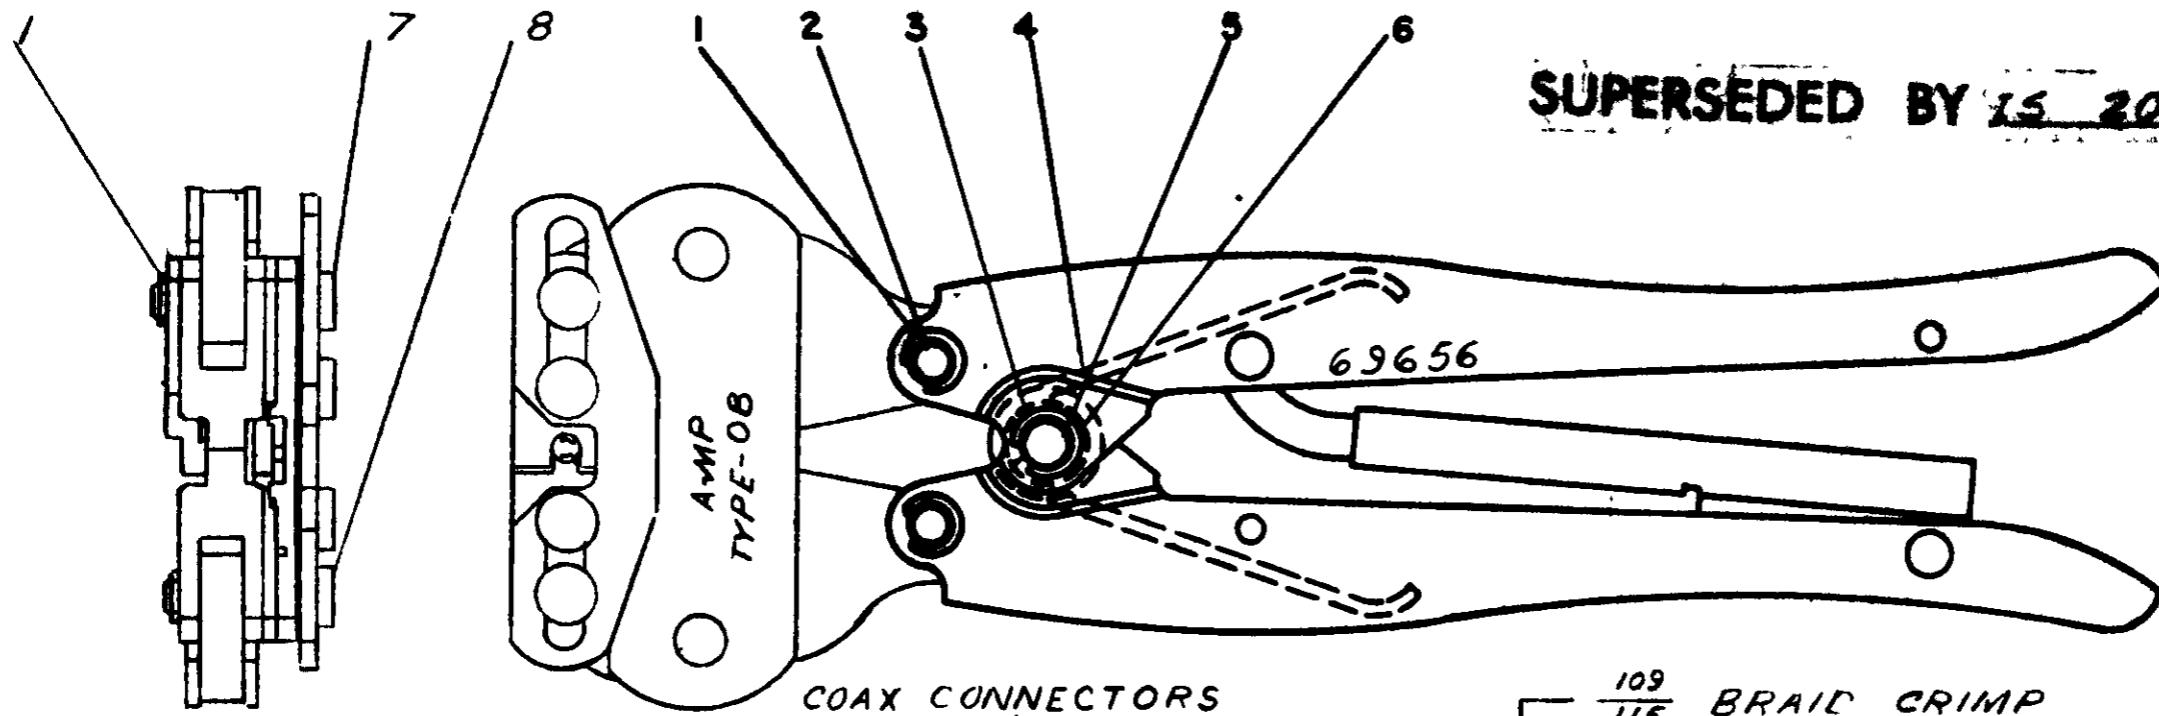

COAX CONNECTORS
51565-1; 51563-1

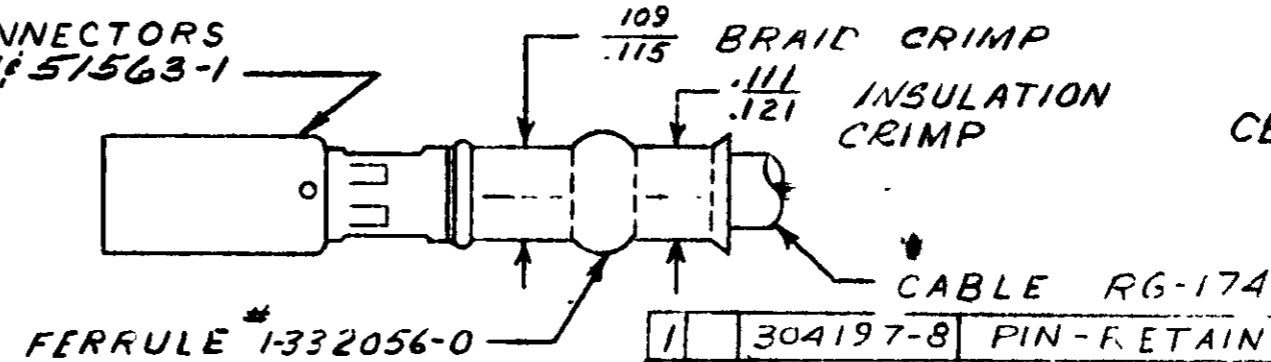

CENTER CONTACT CRIMP
(USE PLUG GAGE)

PLUG GAGE DIMENSIONS APPLY WHEN TOOL IS
BOTTOMED BUT NOT UNDER PRESSURE.

FOR REPLACEMENT OF PARTS OTHER THAN
LISTED, TOOL SHOULD BE RETURNED TO OUR
FACTORY TO INSURE PROPER CERTI-CRIMP
ADJUSTMENT.

METHOD OF GAGING CRIMP DIMENSIONS
THE CRIMP DIMENSIONS APPLY ONLY TO
THE ABOVE COMBINATIONS ON A CRIMPED PRODUCT.

"C" DIM'S	
GO	NO GO
.018	.022

QTY	NUMBER	NAME	REMARKS	ITEM NO
1	304197-8	PIN-RETAINING		8
1	304197-2	PIN-RETAINING		7
2	21045-6	RING-RETAINING		6
1	300449	PIN-RETAINING		5
1	39364	SPRING		4
1	39366	COLLAR		3
2	300432	PIN-RETAINING		2
6	21045-3	RING-RETAINING		1

LT	REV	DATE	BY	CHK	APP
B3	REVISED PER ECR-18-007421	6/18	GK	CM	
B2	SUPERSEDED 15 2024-1 RS	11-20	RS		
B1	REVISED	11-70	PL		
B	REVISED	11-70	PL		
A	REVISED	11-70	PL		

QTY	NUMBER	DESCRIPTION
1	69656	ASSEMBLY

©1965 BY AMP INCORPORATED. ALL RIGHTS RESERVED.
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

DR: *C. J. Hayduk 6-1-65*
CHR: *E. J. ... 7-1-65*
DE: *E. J. ... 7-1-65*
APP: *E. J. ... 7-1-65*

MATERIAL AND FINISH: _____
CLASS: _____

WIRE - RANGE - INSULATION: RG-174
TYPE: OE SUB MIN COAX

SCALE: 1-1
LOC: M
NO: 69656
REV: B3

HAND TOOL ASSEMBLY

DIMENSIONS IN INCHES DO NOT SCALE PRINT