

APPROVED BY/DATE  
 C. Westoby 5-21-92  
 REV 9

**SAFETY ORGANIZATION(S).**

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL RECOGNIZED  
 CSA CERTIFIED  
 VDE APPROVED  
 SEV APPROVED

UL 544  
 CSA 22.2, NO.0,0,4,8  
 VDE 565-3  
 SEV 1055/TP1977/5.1.1

**OPERATING SPECIFICATIONS.**

LINE VOLTAGE/CURRENT:

5 AMP., 120/250 VAC  
 6 AMP./40°C, 250 VAC  
 50-60Hz  
 40°C

LINE FREQUENCY:

MAX. CASE RISE @ RATED CURRENT,  
 MAX. LEAKAGE CURRENT, EACH  
 LINE TO GROUND

OPERATING AMBIENT TEMP. RANGE:

-10°C TO +40°C @ RATED CURRENT,  $I_r$   
 IN AN AMBIENT,  $T_a$ , HIGHER THAN 40°C, THE MAXIMUM OPERATING CURRENT,  $I_o$ , IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85 - T_a}{45}}$$

**RELIABILITY SPECIFICATIONS.**

STORAGE TEMPERATURE:

-40°C TO +85°C  
 21 DAYS @ 40°C 95% RH

HUMIDITY:

6 TIMES RATED CURRENT FOR 8 SECONDS

CURRENT OVERLOAD TEST:

**TEST SPECIFICATIONS.**

INDUCTANCE:

.465 mH NOMINAL  
 CAPACITANCE; (MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C)

LINE TO LINE:

.01µF ±20%  
 1.5 MΩ  
 6000 MΩ (MIN) AT 100 VDC

DISCHARGE RESISTOR:

INSULATION RESISTANCE


(R/O DISCHARGE RESISTOR)

**RECOMMENDED RECEIVING INSPECTION HIPOT.**

2250 VDC FOR 1 MINUTE  
 1450 VDC FOR 1 MINUTE

**FILTER APPROVAL.**

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

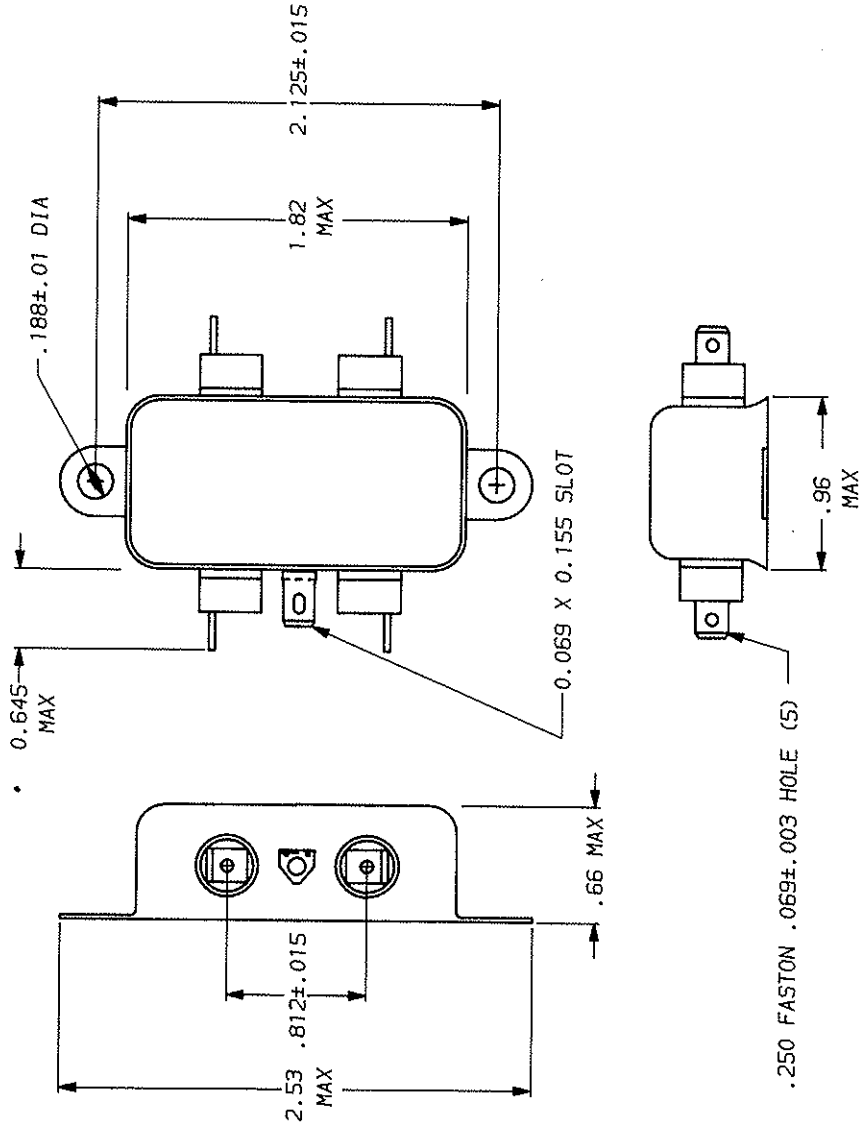

TOLERANCE EXCEPT AS NOTED  
 DECIMAL: .XXX .XX .X ANGLES  
 ENGLISH: ± .025 ± 1°  
 METRIC: ±

FREQUENCY MHz	50Ω - 50Ω MINIMUM INSERTION LOSS					
	.15	.2	.5	1.0	10	30
COMMON	9	11	16	20	23	16
dB						

This document is proprietary to CORCOM INC. and is not to be reproduced nor used for manufacturing purposes except on CORCOM's order or prior written consent.



LIBERTYVILLE, IL 60048

POWER LINE FILTER

FINISH: AS SUPPLIED

AS SUPPLIED

\*RESISTOR ADDED TO PRODUCT BUILT AFTER 3-30-92 (9212).

SCALE: NTS 9-12-89  
 DATE: 9-12-89  
 REV. NO. 6EH1.09