

ITEM	PART#	DESCRIPTION	QTY	UOM
A, B	510470900	PicoBlade1.25 Plug Hsg 9P	2	PC
C	501338000	PicoBlade1.25 Crimp Plug Term Chain	18	PC
D	--	Blank label 12.7x35.5mm (WHT:12.7mm) HF	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B9	CABLE 28 AWG UL 1061 BLACK	BLACK
A2	B8	CABLE 28 AWG UL 1061 BLACK	BLACK
A3	B7	CABLE 28 AWG UL 1061 BLACK	BLACK
A4	B6	CABLE 28 AWG UL 1061 BLACK	BLACK
A5	B5	CABLE 28 AWG UL 1061 BLACK	BLACK
A6	B4	CABLE 28 AWG UL 1061 BLACK	BLACK
A7	B3	CABLE 28 AWG UL 1061 BLACK	BLACK
A8	B2	CABLE 28 AWG UL 1061 BLACK	BLACK
A9	B1	CABLE 28 AWG UL 1061 BLACK	BLACK


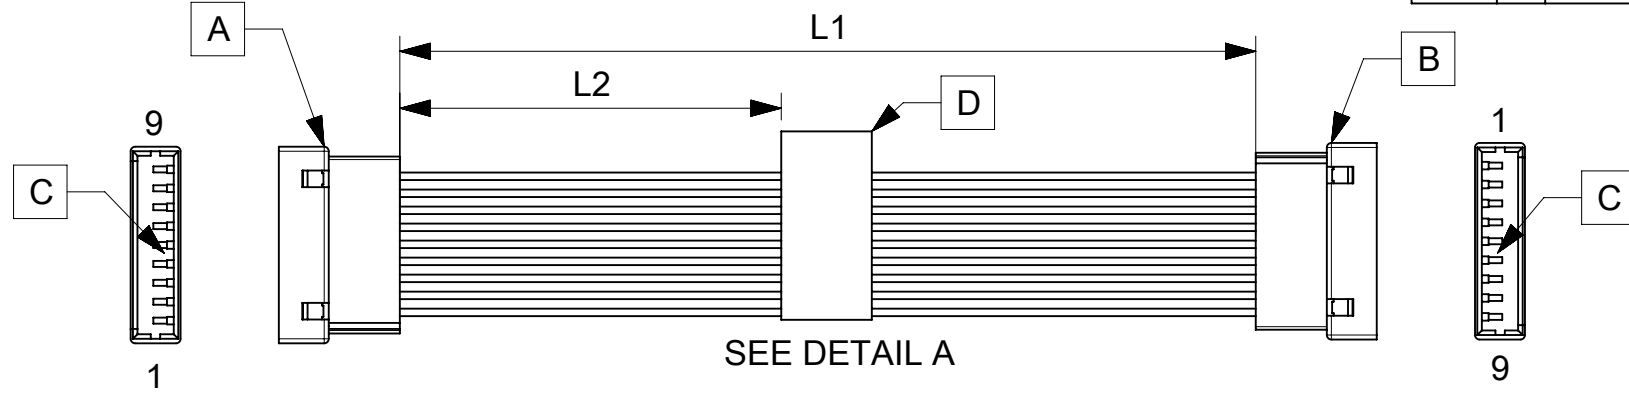


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2181100900	75±5	30	9 CIRCUIT PICOBLADE P:P CABLE 75MM
2181100901	150±6	70	9 CIRCUIT PICOBLADE P:P CABLE 150MM
2181100902	225±6	105	9 CIRCUIT PICOBLADE P:P CABLE 225MM
2181100903	300±8	145	9 CIRCUIT PICOBLADE P:P CABLE 300MM
2181100904	425±8	205	9 CIRCUIT PICOBLADE P:P CABLE 425MM



- NOTES
1. Cable assembly to be tested 100% for continuity and polarity.
 2. Connector view shown is from mating side.
 3. Label text must be 2mm max. in height with Arial font.
 4. Label must be wrapped in flag type on the cables.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
04/03/2021	A	INITIAL RELEASE	ARAJU

DOCUMENT STATUS	P1	RELEASE DATE	2021/03/26	04:03:38
-----------------	----	--------------	------------	----------

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS CURRENT REV DESC:							
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				EC NO: 659320 DRWN: ARAJU 2021/03/04 CHK'D: RDESAI01 2021/03/26 APPR: RDESAI01 2021/03/26			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING: A4-SIZE	SERIES: 218110	DOCUMENT NUMBER: 2181100900	DOC TYPE: PSD	DOC PART: 000	REVISION: A
	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET	SHEET NUMBER: 1 OF 1					