
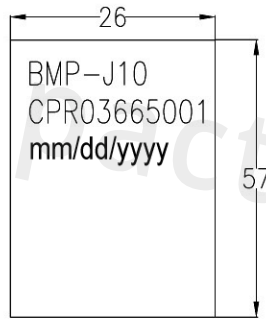
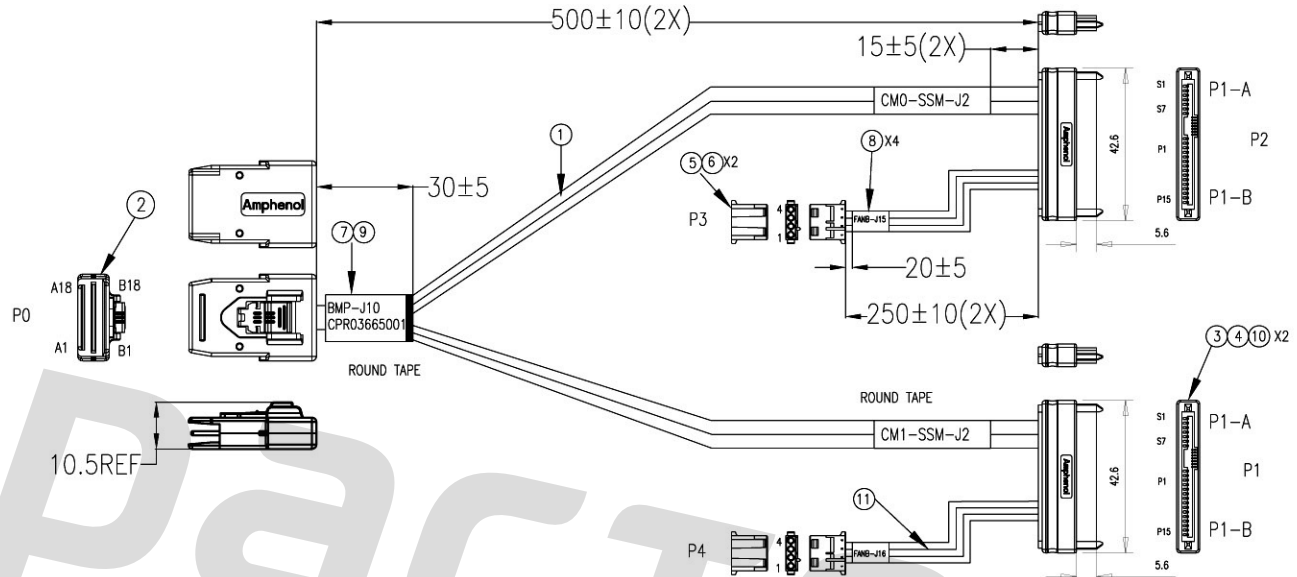


The marking on this product doesn't contain environmental hazardous, materials per directive 2002/95/EC for RoHS compliant.

NOTE:
1. THIS CABLE SHALL PASS MINI SAS 6G TEST.

APPROVED BY
COMPANY: _____
PURCHASING/ENGINEER: _____
DATE: _____

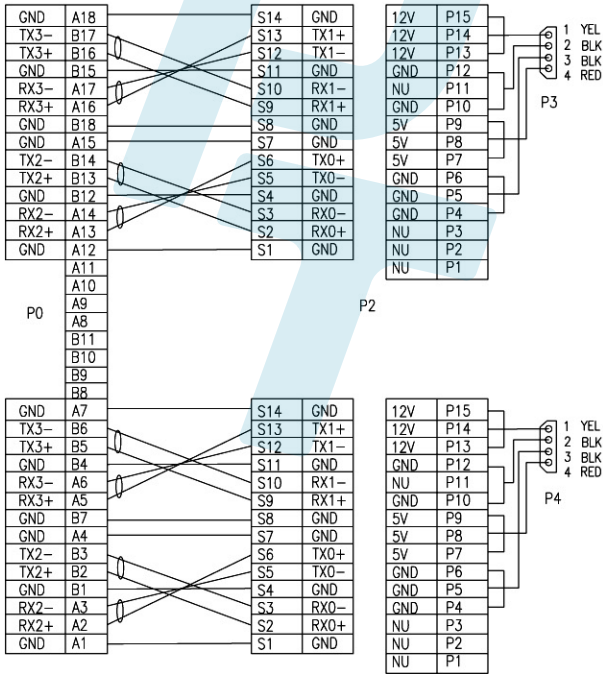

ITEM	VENDOR P/N	DESCRIPTION	QTY
11	R1007018XX	WIRE:UL1007,18AWG, BLK/RED/YEL	A/R
10	RMRPE45NT1	PE:LOW DENSITY,CLEAR	A/R
9	HMLSB57262	LABEL:57*26MM,BLANK, WHT,R2,HF	1
8	RMLSB36202	LABEL:36*20MM,WHT	4
7	RMMTP00036	ACETOUS Tape:30mm WIDE,3.0M/REEL,BLK	A/R
6	RT50800008	CRIMP TERM:BRS,TIN-PD,14 ~20AWG,REEL	8
5	RH50804013	HSG,1*4P,5.08PH,F,NL66,V	2
4	RMRPV45101	OVERMOLD, PVC, BLACK	A/R
3	RCSS29F006	SAS CONN:29P,F,PB,Au15u ,PBT,BLK	2
2	AST8087-0036	MINI SAS 36POS,STR	1
1	RWST300007	SATA CBL:30AWG,RED,LF	A/R

WIRING DIAGRAM

LABEL DETAIL

For Customer Made Items Order:

- * Minimum \$200 value
- * NCNR (Non-cancelable & non-returnable)
- * One time tooling charge, if any, need to be paid in advance with P.O.
- * All drawings of First Articles, if any, must be approved with authorized signature & date.
- * Turn around time counted ARO (After Received FA or drawing approval)

GENERAL TOLERANCES

.X:	± 0.5
.XX:	± 0.3
.XXX:	± 0.01
ANGULAR:	± 1°



DRAWN:	ENOCH LIN	DATE:	11/07/2012
CHECKED:	HANK RAN	DATE:	11/07/2012
APPROVED:	DAVID CHAN	DATE:	11/07/2012

Amphenol

TITLE:
MINI SAS TO SAS*2+POWER

DWG. No.: AMPH-87SAS29X2-500

SCALE: NONE SHEET 1 OF 1

UNIT: MM SIZE: REV.: B