
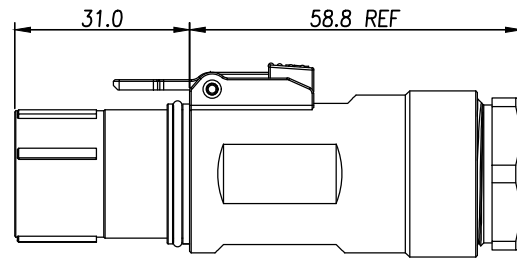

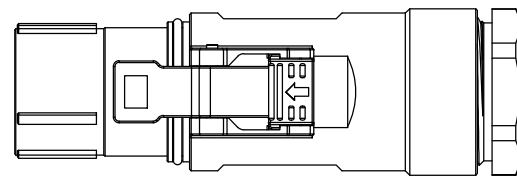


THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.

Customer Drawing

REV		ZONE	ECO	DESCRIPTION	DATE	BY	APPR
A		--	--	INITIAL RELEASE	05/11/21	Steven	JL

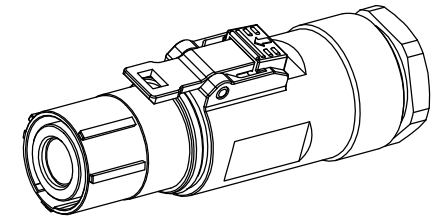

规格参数:

1. 连接器型号: PL18()-301
2. 工作温度: -40° C~+125° C.
3. 连接器材料:
外壳: 锌合金, 绝缘胶芯:PBT,
密封件: 硅橡胶&氟橡胶
4. 连接器颜色: 哑镍色
5. 机械寿命: 100 Min.
6. 连接器阻燃等级: 绝缘塑胶UL94-V0, 密封件UL94-HB
7. 连接器绝缘: 1000V DC 500MΩ
8. 连接器防护等级: IP67 & IP2X.
9. 高压喷射防护等级: IP6K9K
10. 产品满足ROHS 要求
11. 禁用二次料
12. 插拔次数≥100, 不影响连接器性能
13. 外观要求
外观面: 外表面不允许有破损、缺胶、颜色异常等现象
非外观面: 塑件不能有破裂, 破损
14. 零件重量: 0.11Kg

产品料号	产品描述
EX-HA008396	PowerLok 10mm 1POS Blind Plug X With HVIL
EX-HA008397	PowerLok 10mm 1POS Blind Plug Y With HVIL
EX-HA008398	PowerLok 10mm 1POS Blind Plug U With HVIL
EX-HA008399	PowerLok 10mm 1POS Blind Plug V With HVIL
EX-HA008400	PowerLok 10mm 1POS Blind Plug W With HVIL
EX-HA008401	PowerLok 10mm 1POS Blind Plug T With HVIL

AMPHENOL 	Amphenol Technical Products International GZ					
	第三角投影 THIRD ANGLE PROJECTION	页 面 SHEET	幅 面 SIZE	版 次 REV.	比 例 SCALE	PART NAME: PowerLok 10mm 1POS Metal Cap
日期 DATE	1 of 1	A3	A		DWG NO: EX-HA008396~8401	
UNLESS OTHERWISE SPECIFIED 1) All dimensions are in metric(mm). 2) Tolerances are as follows: 0 PL DEC ±1.00 1 PL DEC ±0.50 2 PL DEC ±0.20	制 图 DRAWN Steven	日期 DATE 05/11/21	Angles ±1°			
签 名 SIGNATURE	审 核 CHECKED	批 准 APPROVAL	CUST PART #: N/A		CUST REV. -	