

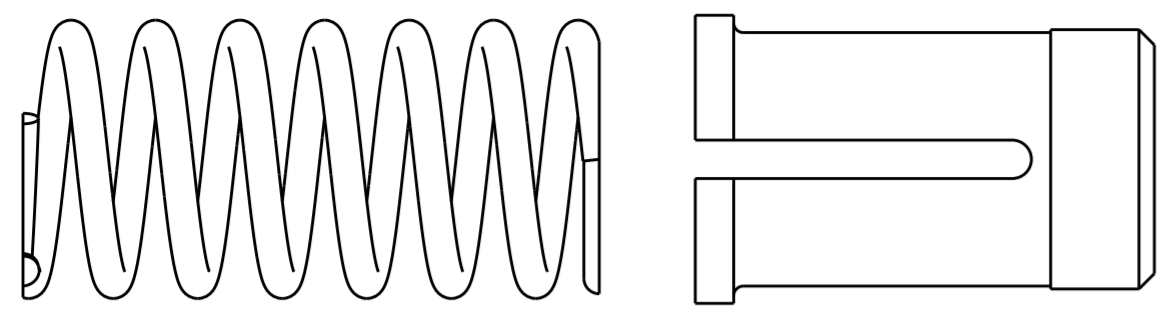


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
B		REV PER ECO 20-012150	9-15-20	CT FB

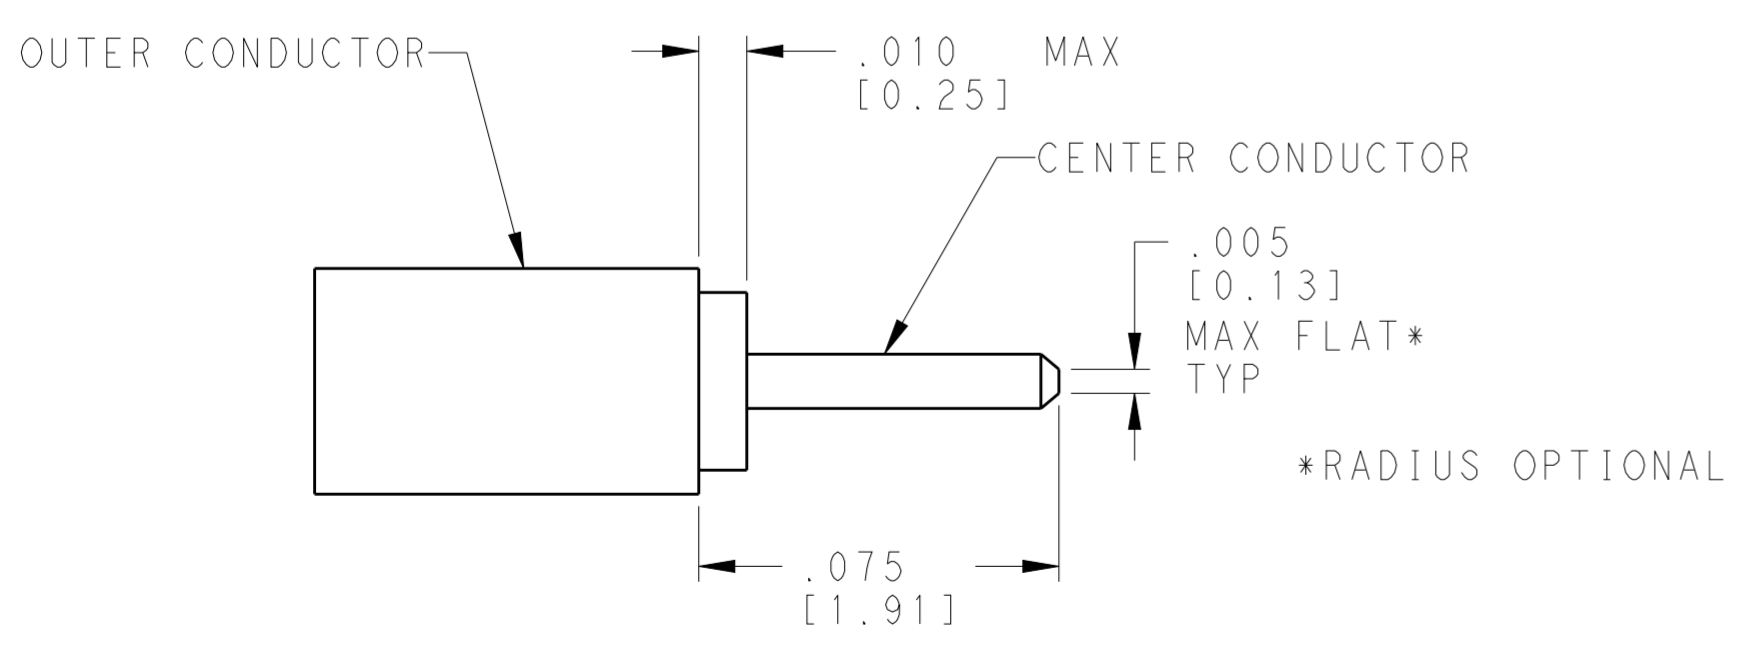

SPRING AND ADAPTOR KIT FOR .086 CABLE <sup>5</sup>

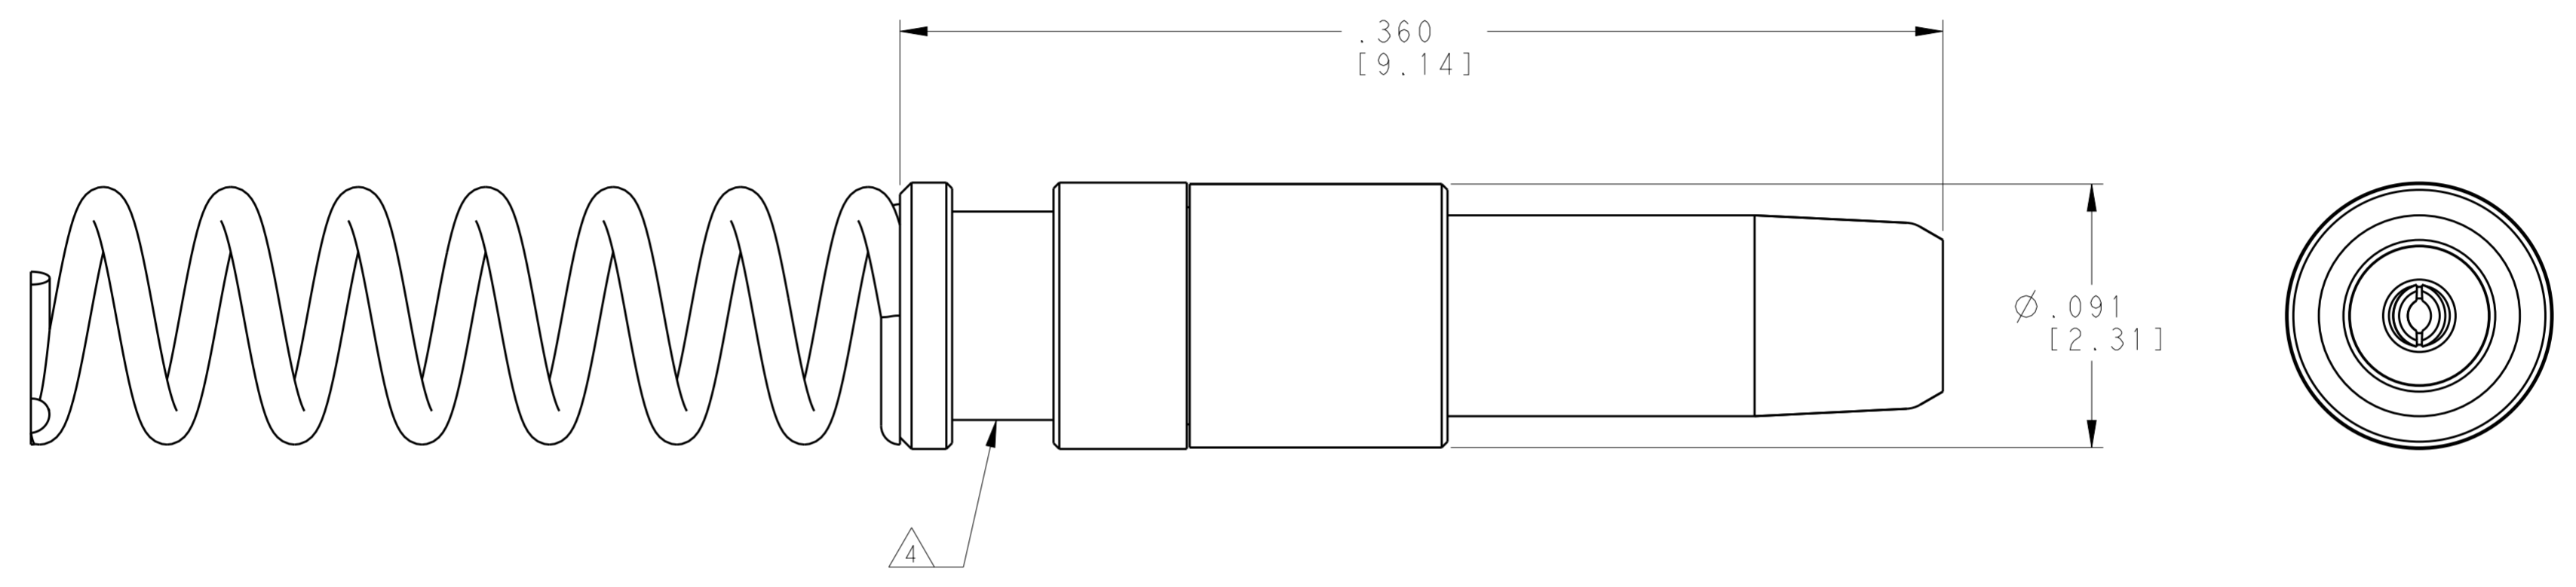

SCALE 25:1  
 CABLE PREPARATION FOR  
 Ø.047 SEMI-RIGID CABLES

- <sup>1</sup> MATERIAL:  
 BODY AND CENTER CONTACT: COPPER ALLOY  
 INSULATOR: TEFLON (PTFE)  
 SPRING: STAINLESS STEEL
- <sup>2</sup> FINISH: FRONT BODY AND CENTER CONTACT: 50-90 μIN GOLD PLATE OVER NICKEL  
 REAR BODY: 3-15 μIN GOLD PLATE OVER NICKEL
- 3. SPRING IS SHIPPED LOOSE FROM CONTACT ASSEMBLY
- <sup>4</sup> RETENTION GROOVE REQUIRED FOR .086 ADAPTER KIT.
- <sup>5</sup> CONTAINS 2302345-2 AND ADAPTER KIT 2373609-1.
- 6. DEPENDING ON DATE OF MANUFACTURE, THE RETENTION GROOVE MAY OR MAY NOT BE FOUND ON INVENTORY ON 2302345-1.

<sup>5</sup>	2302345-3
<sup>4</sup>	2302345-2
--	2302345-1
REMARKS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. MILLER 31MAY2016	<b>STE</b> TE Connectivity	
DIMENSIONS: INCHES [mm]		CHK D. WILSON 31MAY2016		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. WILSON 11APR2018	NAME NanoRF PIN CONTACT ASSEMBLY	
0 PLC ±	1 PLC ±	PRODUCT SPEC 108-163006	SIZE A200779	CAGE CODE C-2302345
2 PLC ±	3 PLC ±.005[0.13]	APPLICATION SPEC 408-163016	DRAWING NO	RESTRICTED TO
4 PLC ±	ANGLES ±	WEIGHT	SCALE 20:1	SHEET 1 OF 1
FINISH		CUSTOMER DRAWING	REV B	