


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
4. OPERATING FORCE: 500gf MAX.
5. TRAVEL: 0.6 ± 0.25mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: 125 PIECES PER TUBE
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EU (ROHS) COMPLIANT
- ▲ 15. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE "OFF" POSITION

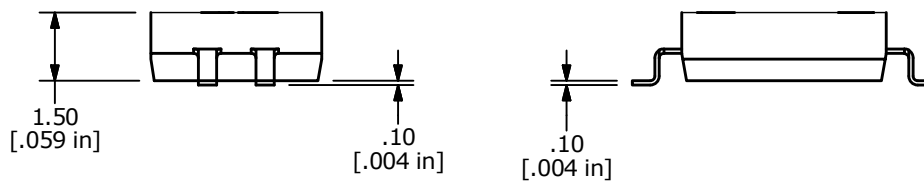

B	23704	updated drawing	12/12/18	MW
A	17521	RELEASED FOR PRODUCTION	8/1/07	BF
REV	PCR NO	DESCRIPTION	DATE	BY

E-SWITCH®				
TITLE KAN1102R				
SCALE	DATE	DR	DWG	REV
6:1	8/1/2007	BF	N111251	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED