


# OA254AP Series



AC Fans - 115, 230V  
254mm x 89mm (10" x 3.5")

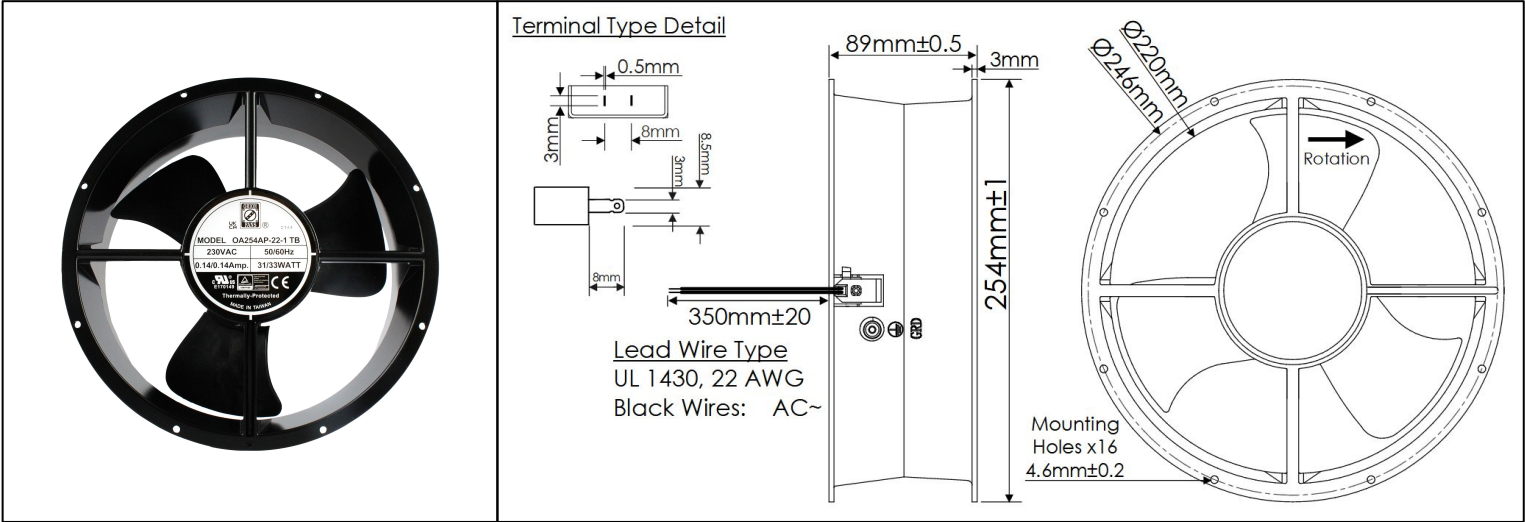

<b>Frame</b>	Die Cast Aluminum, Black Finish	<b>Operating Temperature</b> -20°C ~ +80°C  <b>Storage Temperature</b> -40°C ~ +80°C  <b>Life Expectancy</b> 60,000 Hours (L10 at 40°C)  <b>Available Options</b> Tachometer Output IP Ratings  Weight: 4.2 lbs	
<b>Impeller</b>	PBT, UL94 V-0 Plastic		
<b>Connection</b>	2x Wire Leads, 22 AWG, or Terminals		
<b>Motor</b>	AC Capacitor Induction, Thermally Protected		
<b>Bearing System</b>	Ball Bearings		
<b>Dielectric Strength</b>	1500VAC/min, <1mA		
<b>Insulation Resistance</b>	≥10MΩ @ 500 VDC		

Part Number	Rated Voltage (Volts AC)	Frequency Range (Hertz)	Voltage Range (Volts AC)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H <sub>2</sub> O)
OA254AP-11-1*B	115	50 / 60	80 ~ 130	31 / 33	1400 / 1650	460 / 547	52 / 55	0.32 / 0.39
OA254AP-22-1*B	230	50 / 60	160 ~ 260	31 / 33	1400 / 1650	460 / 547	52 / 55	0.32 / 0.39

\*Substitute "W" for Wire Lead type power connection, or "T" for Terminal type power connection.