



OD58-12

Vertically Polarized Omni Antenna 5470-5850 MHz

The 5 GHz omnidirectional antenna systems offered by Laird are constructed of UV-stable fiberglass with all stainless-steel brackets standard. They have type N female bulkhead connectors. N male connectors also available for mounting directly to equipment. The horizontal pattern is a full 360 degrees with gain flatness better than 2 dB. The antennas are vented at the base to prevent any moisture build-up inside. Antennas are DC grounded for lightning protection.

FEATURES AND BENEFITS

- 12 dBi antenna gain
- Type N female integrated bulkhead connector
- Rugged, lightweight, and waterproof
- Also available with N male connector
- All stainless-steel bracket for better corrosion protection
- Extra wide strap and larger diameter base for better stability
- Extended connector shroud and extended length N connector for easier/more reliable weatherproofing

APPLICATIONS

- 5.4 to 5.8 GHz ISM band applications
- Base station antennas
- 802.11a wireless systems
- Point-to-multi-point systems
- Wireless broadband systems
- WLAN access points
- Mesh networks
- WiMax

ELECTRICAL SPECIFICATIONS

Operating Frequency (MHz)	5470-5850
VSWR	1.5:1
Gain (dBi)	12
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	100
Vertical Plane 3 dB Beamwidth	7°
Horizontal Plane 3dB Beamwidth	360°

MECHANICAL SPECIFICATIONS

Pole Diameter (OD) - mm (in.)	25.0-51.0 (1.0-2.0)
Dimensions - diameter x height - mm (inches)	20 x 25-51 (0.8 x 1-2)
Weight - kg (lbs.)	0.5 (1.1)
Lightning Protection	DC Grounded

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature - °C (°F)	-40 to +70°C (-40 to +158°F)
Wind Velocity - m/sec (mph)	56 (125)
Wind Loading - km/hr (mph)	8.75lb @ 160.9 (100), 13.7lb @ 201 (125)
Material Substance Compliance	RoHs compliant

CONFIGURATION


PART NUMBER	DESCRIPTION
OD58-12	12 dBi 5740-5850 MHz wide-band omnidirectional antenna
OD58M-12	12 dBi 5740-5850 MHz wide-band omnidirectional antenna with N-male connector

MOUNTING OPTIONS



Figure 1: Mast Mount

RADIATION PATTERNS

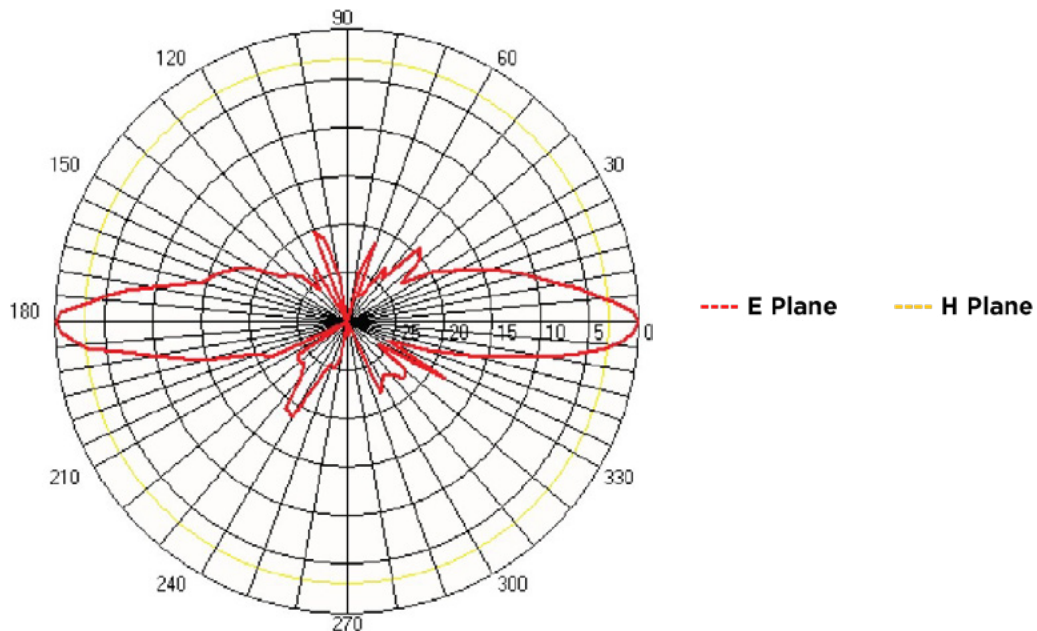

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, and TE connectivity (logo) are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

08/22 Original