

CUBEFuse™ safety switch



Better safety and application versatility



Finger-safe components significantly enhance safety by helping to reduce accidental contact with live parts.

Product description:

Eaton's Bussmann® series CF heavy duty 600Vac safety switch is UL® 98 Listed and features a Short-Circuit Current Rating (SCCR) up to 200kA AC. It is available up to 100A in NEMA® 1, 3R, 12, and 4X enclosures.

Utilizing the finger-safe class CF CUBEFuse™, the Bussmann series safety switch is horsepower rated for use in motor applications, and is suitable for service entrance use with a neutral kit.

Additional features include a lineside shield and red flange handle that accommodates up to three padlocks to facilitate lockout/tagout procedures during maintenance.

Features and benefits:

- Finger-safe, current-limiting CUBEFuse design provides a safer environment for personnel by helping to prevent exposure to live parts and reducing arc flash hazard levels.
- Dual interlock door helps prevent access by unauthorized personnel inside the enclosure when the system is energized.
- A visible double break, quick-make/quick-break rotary blade mechanism provides visual confirmation of switch ON/OFF status.
- Optional viewing window provides visual confirmation that switch contacts have operated and the ability to view fuse indication *indicating time-delay CUBEFuse only 6-100A without opening the switch door.



Indicating time-delay CUBEFuse.

* Indication time-delay CUBEFuse only 6-100A.

Specifications

Ratings:

- Heavy duty
- Volts
 - 600Vac/250Vdc
- Amps
 - 30, 60 and 100A
- SCCR
 - 200kA AC
 - 10kA DC

Agency information:

- UL 98 standard for enclosed dead front switches
- UL 50 standard for enclosures for electrical equipment
- NEMA KS-1
- UL Listed, File E5239-G
- cUL Listed, C22.2 No.4-M89

Maximum horsepower ratings

Amp rating	Fuse type (performance/Class)	Single-phase		Three-phase	
		480Vac	600Vac	480Vac	600Vac
30	CUBEFuse (Class CF*)	7 1/2	10	15	20
60	CUBEFuse (Class CF*)	20	25	30	50
100	CUBEFuse (Class CF*)	30	40	60	75

*Class J electrical performance, Eaton recommends using Bussmann series time-delay CUBEFuse for motor circuits.

Enclosures:

- NEMA 1
- NEMA 3R
- NEMA 12
- NEMA 4X stainless

Options and accessories:

- Viewing window
- Neutral kit¹
- Auxiliary contacts²

Fuses (order separately):

- Time-delay Class CF CUBEFuse
 - Indicating (TCF_)
 - Non-indicating (TCF_RN)
- Fast-acting Class CF CUBEFuse
 - Non-indicating (FCF_RN)

Applications:

- Commercial and industrial buildings
- Manufacturing facilities
- Healthcare facilities
- Educational campuses
- HVAC

For more information see data sheets:

- Safety switch (No. 1156)
- Time-delay CUBEFuse (No. 9000)
- Fast-acting CUBEFuse (No. 2147)

¹Neutral kit for service entrance use.

Catalog numbers:


- DH030NKB (30A and 60A)
- DH100NKB (100A)

²Auxiliary contact kit for remote indication.

Catalog numbers:

- DS200EK1B (1NO/1NC)
- DS200EK2B (2NO/2NC)

CUBEFuse safety switch catalog numbering system

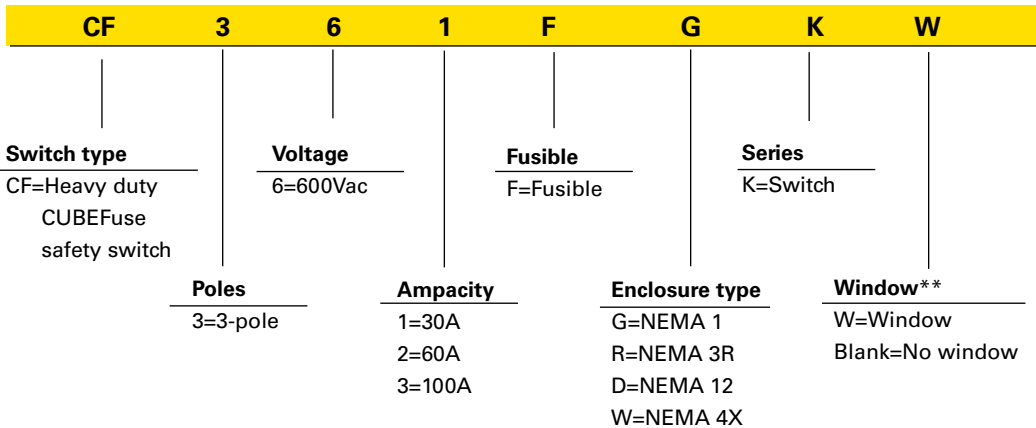

**Only available with NEMA 12 and 4X stainless enclosures.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Bussmann Division
114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2015 Eaton
All Rights Reserved
Printed in USA
Publication No. 10141
October 2015

Eaton, Bussmann and CUBEFuse are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

NEMA is a registered trademark of the National Electrical Manufacturers Association.
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**