


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description
1	SVM-61T-P2.0	VL Connector Male Contact
2	UL1015, 14 AWG	Black

Electrical Specifications
Current: 20.0A AC/DC
Voltage: 600V AC/DC

APPLICABLE HOUSINGS		
NO. OF CIRCUITS	HOUSING PART NO. WITH PANEL LOCKS	HOUSING PART NO. WITHOUT PANEL LOCKS
1	-	VLR-01VF
2	VLR-02V	VLR-02VF
3	VLR-03V	-
4	VLR-04V	VLR-04VF
4	VLR-04VN	-
6	VLR-06V	-
8	VLR-08V	-
12	VLR-12V	-

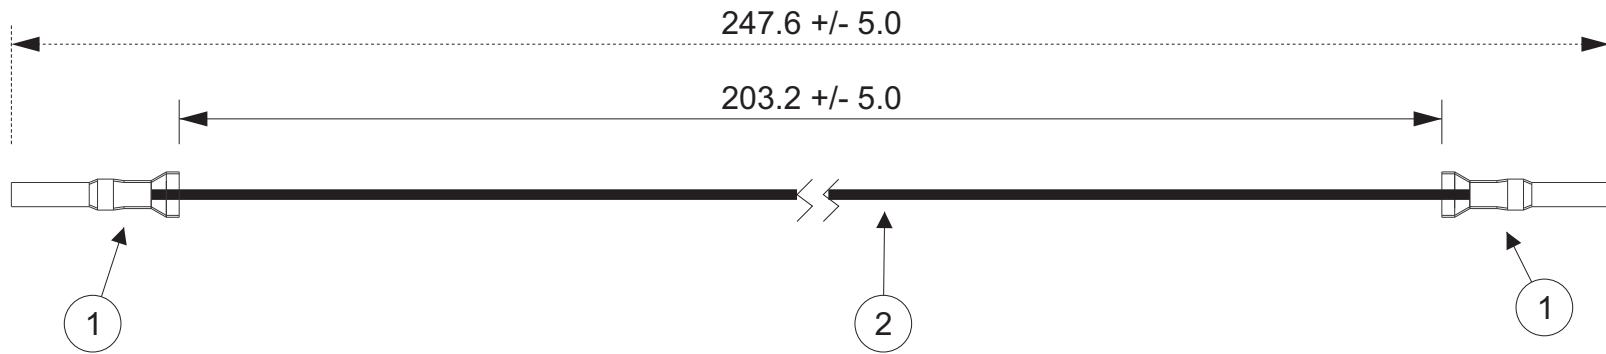

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME	
		DESCRIPTION	
		6.2mm Pitch VL Series Standard Leads - 8" Inside Length DOUBLE END LEADS, M-M	
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.
Checked By: Steven Pilkington	SCALE	ASVMSVM14K203	REV
	1:1	DRAWING NO. GAM-443	DATE 6/5/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/03/2018	LM