



P		LTR	DESCRIPTION	DATE	APPROVED
✓	✓	0	REC NPS 81-3231	2-28-82	TJ
✓	✓	A	ADD RG-188/U & REV STRIP LENGTH; CB3-424	7-13-83	TS/DH
✓	✓	B	ADD P/N 222000-1 PER AJ-3009	5/31/88	DBM/RJM

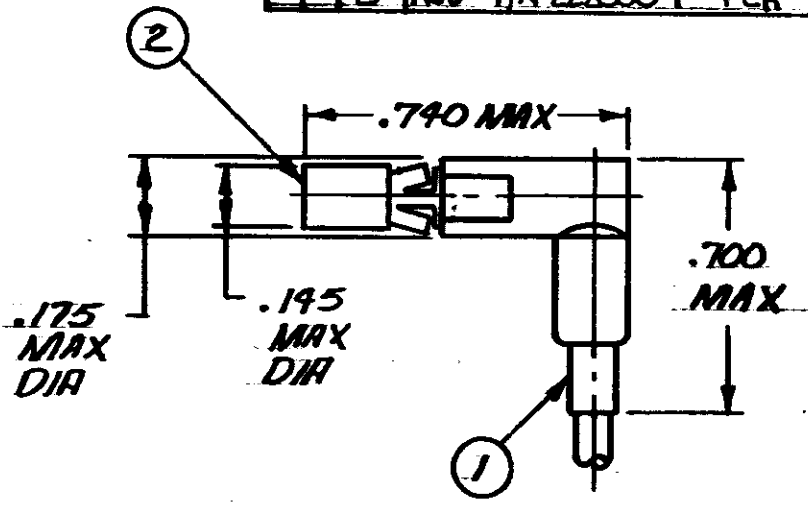

1. .180 MIN DIA HOLE REQ'D FOR CONTACT TO FEED THROUGH P.C. BOARD.
2. FOR USE WITH: RG-316/U, & 188/U CABLE.
3. CRIMP TOOL: 220215-2.
4. SEE IS. 2923.
7. ITEM 3 IS USED TO STABILIZE CONTACT IN THE HOUSING CAVITY; OTHERWISE DISCARD.

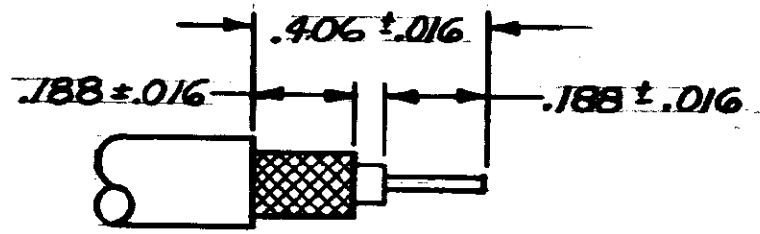

RECOMMENDED STRIP LENGTH

3	1	RING, ALIGNMENT	222000-1
2	1	RT. ANGLE SOCKET ASSY	228537-1
1	1	FERRULE	228538-3
ITEM	QTY	DESCRIPTION	PART NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ± ANGLES ±

MATERIAL _____

FINISH _____

CONTRACT NO _____

DESIGNER: T. Smith 7/23/82

CHECKER: [Signature] 7/24/82

APPROVED: [Signature] 7/26/82

DESIGN APPROVED: [Signature] 7/26/82

OTHER APPROVED: T. Smith 7/28/82

AMP | AMP INCORPORATED
Harrisburg, Pa. 17105

NAME: CONNECTOR, COAXIAL, MULTIPLE, RF, CONTACT, SOCKET, RTANG, CA, MICROMINI

SIZE: **A** | FSCM NO: **00779** | DRAWING NO: **227606-4**

SCALE: NTS | SHEET: _____

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. 19

BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.