

# PCM 200/125 XT



Sample image

**Order symbol:** PCM 200/125 XT

**Product nbr:** 6015927

**Description:** Enclosure. PC


**Remarks:** Smoked transparent cover

**EAN:** 6418074038401

**El. number:**

- Finland: 3421628
- Denmark: 8212027378
- Sweden: 2535460

**Including:** Base with TPE gasket. screws for mounting plate/DIN-rail and cover with polyamide cover screws.

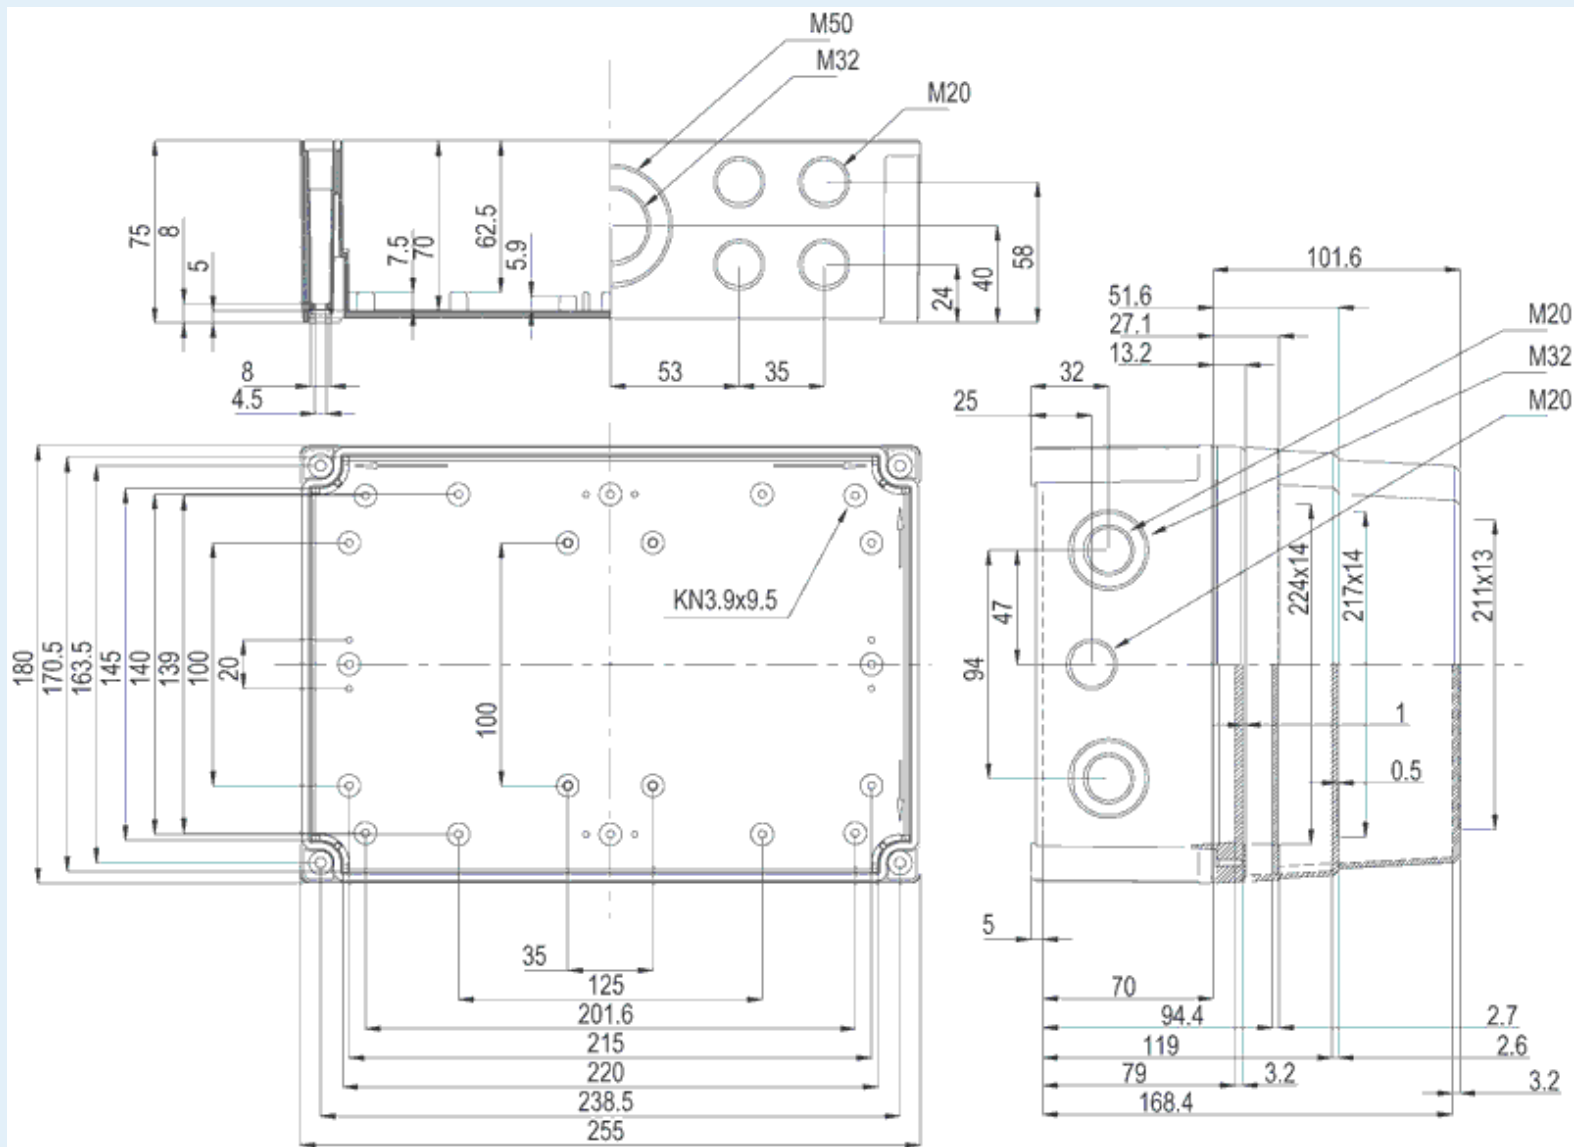

**Dimensions:**      **Height**      **Width**      **Depth**

mm:                      255              180              125  
 inch:

**Materials:**

Material:                      Polycarbonate  
 Base colour:                      RAL 7035 -light grey  
 Cover colour:                      Clear transparent  
 Gasket material:                      Polyurethane

**Temperatures:**

Temperature °C (short term)::                      -40 ... 120  
 Temperature °C (continuous):                      -40 ... 80  
 Temperature °F (short term):                      -40 ... 250  
 Temperature °F (continuous):                      -40 ... 175

**Accessories:**

- MIN 20      DIN-15 Mounting rail. for enclosures: (225 x 15 x 1)
- HFP 180      Front panel hinge series
- MIN 15      DIN-15 Mounting rail. for enclosures: (150 x 15 x 1)
- MIV 200      Back Panel (Galvanized steel). for enclosures: (223 x 148 x 1)
- FP A 200/180      Front panel (Aluminum). for enclosures: (237 x 170 x 1)
- MIV 15      DIN-35 Mounting rail. for enclosures: (150 x 35 x 1)
- FP 22046      Mounting foot kit (4 pcs)
- MIV 20      DIN-35 Mounting rail. for enclosures: (225 x 35 x 1)

**Rating:**

Ingress protection (EN 60529):                      IP66; IP67;  
 Impact Resistance (EN 62262):                      IK08;  
 Electrical insulation:                      Totally insulated  
 Halogen free (DIN/VDE 0472, Part 815):                      1

UV resistance:	UL 508
Flammability Rating:	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	

**Certificates:**

Certificate FI 40847