



American Electrical, Inc.

Industrial Electrical Accessories

425 Southlake Blvd. • Suite 9-B • Richmond, VA 23236 • (804) 379-2899 • Fax: (804) 379-8935

Freedom Line of Disconnect Switches

SD1 Series









Allow breaking and disconnecting of load for low voltage equipment at rated current



SD 1 SERIES according to UL 508


Part Number (Black/Red)	19200-11 19210-11	19201-11 19211-11	19202-11 19212-11	19203-11 19213-11
Rated Current	16 A	25 A	32 A	40 A
Max Voltage	600 V	600 V	600 V	600 V
Short Circuit Rating	5 kA	5 kA	5 kA	5 kA
Maximum UL Horsepower 3-Phase (120V)	3	3	3	3
Wire Range	16 – 6 AWG	16 – 6 AWG	16 – 6 AWG	16 – 6 AWG
Tightening Torque	2 Nm	2 Nm	2 Nm	2 Nm

SD1 SERIES ACCESSORIES

PART NUMBER	DESCRIPTION
	19440 Connector 6-8 Pole
	19400-11 Door Interlock Handle Black
	19401-11 Emergency Door Interlock Handle Red/Yellow
	19535-100 Remote Operator Shaft 100mm Length
	19535-200 Remote Operator Shaft 200mm Length
	19535-300 Remote Operator Shaft 300mm Length
	19414* SD1 4th Pole
	19423* SD1 Aux Contact
	19421* SD1 Ground Pole
	19419* SD1 Neutral Pole

*These modules integrate with the disconnect switch. They are separate components that screw into the main switch for additional applications.

Dimensions

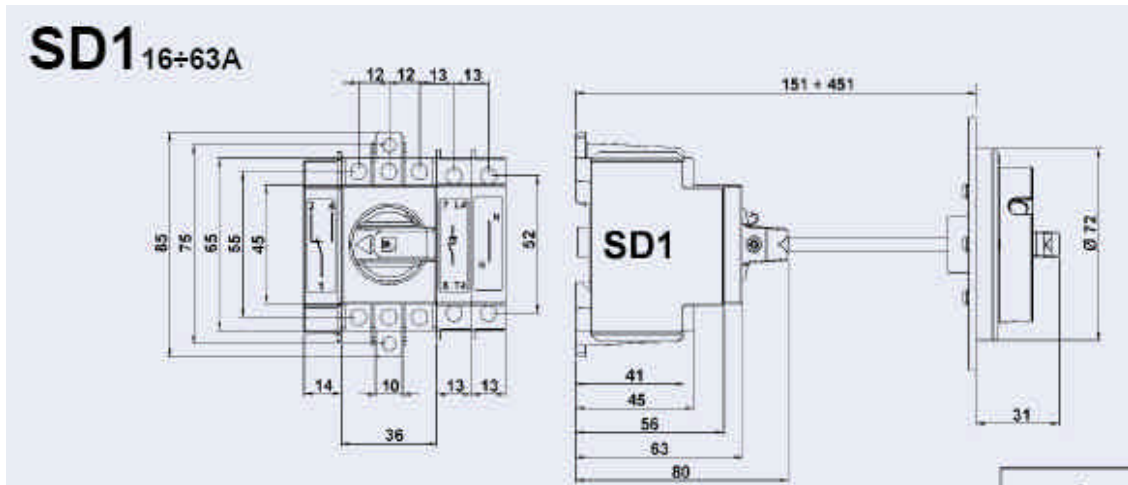

Door Drilling

