
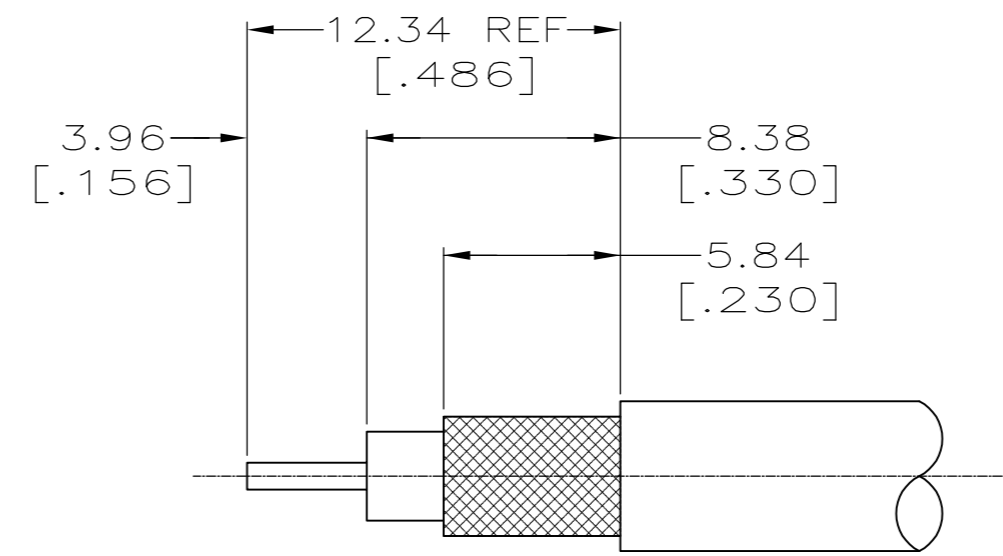


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A1		REV PER ECR 17-004509	28APR2017	AS RS

- 1. USE WITH PRO-CRIMPER 354940-1.
- 2. USE INSTRUCTION SHEET 408-9781

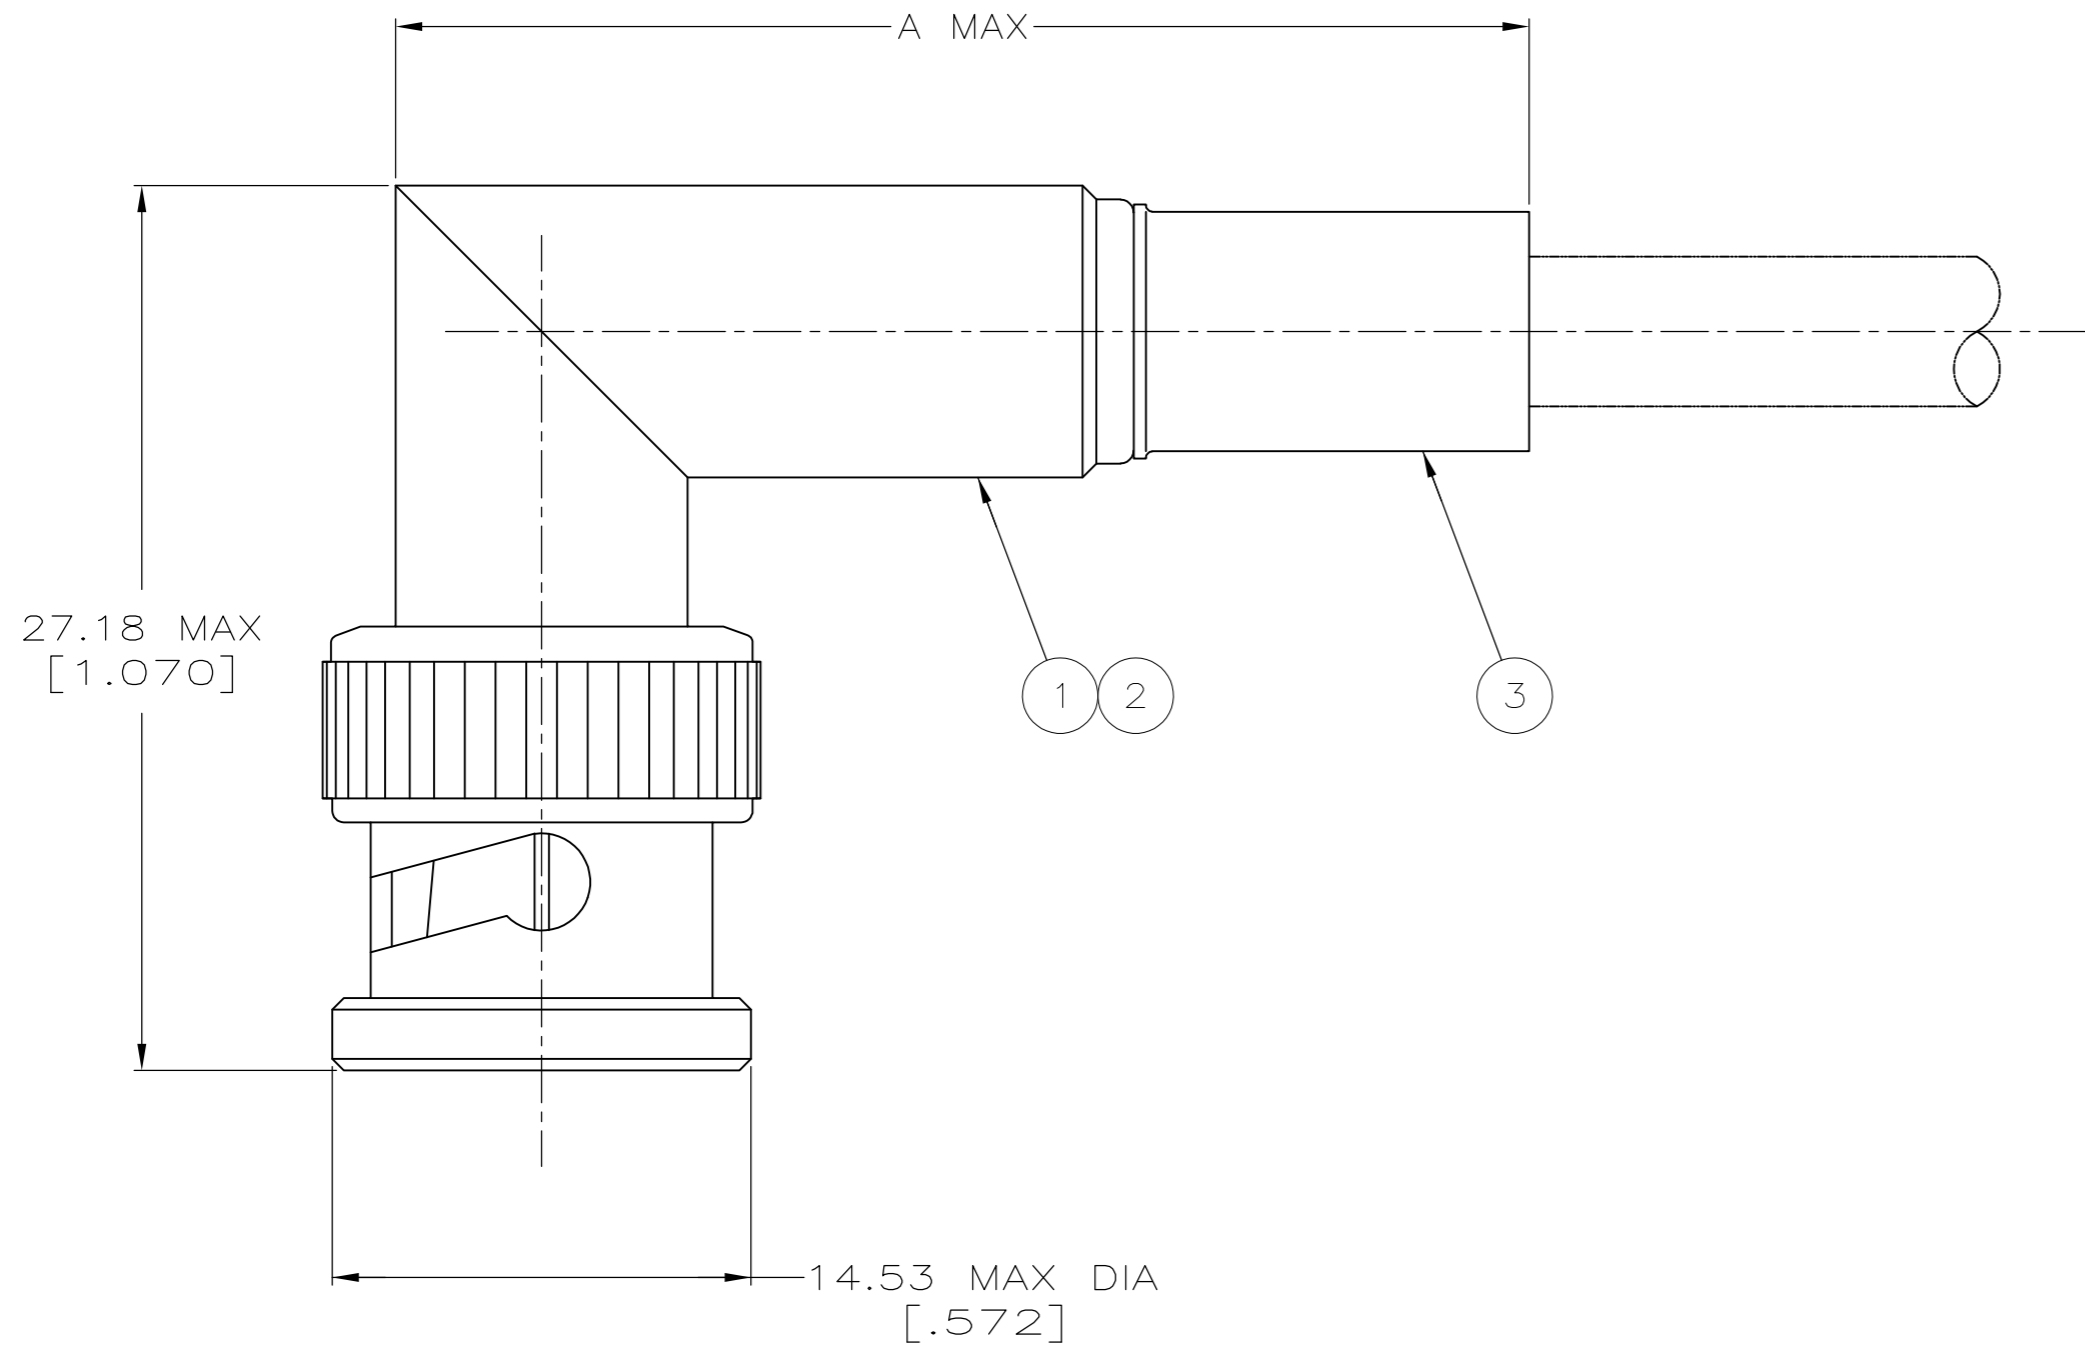

RECOMMENDED STRIP LENGTH

OBSOLETE	AT&T 735	58174-1	39.88 [1.570]	9-328666-2	221200-9	413947-2	5221402-7
OBSOLETE	BELDEN 9145	58085-1	39.88 [1.570]	9-50428-0	2-221200-5	413947-6	5221402-4
OBSOLETE	RG-59/U, 59A/U, 59B/U	58085-1	39.88 [1.570]	9-50428-0	221200-3	413947-6	5221402-2
OBSOLETE	BELDEN 9248 & MADISON W/18AWG C/C	58086-1	39.88 [1.570]	9-50427-0	3-221200-2	413947-5	5221402-1

CABLE	DIE SET	A	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSEMBLY QTY=1	PART NUMBER
-------	---------	---	--------------------	--------------------	--------------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 21APR2005	<b>TE</b> TE Connectivity	
		CHK J. HAVENER - 21APR2005		
DIMENSIONS: mm [INCHES]		APVD J. LIPPERT - 21APR2005	NAME PLUG, RIGHT ANGLE, 75 OHM, COMMERCIAL	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.41[.016] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-12020	SIZE A2	
MATERIAL -		FINISH -	WEIGHT 1	CAGE CODE 00779
		CUSTOMER DRAWING		SCALE 4:1
		SHEET 1 OF 1		REV A1