

Electronic housing - EMG 10-B2 - 2947750

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)



Custom circuit module, consisting of housing, MKDS 3 connection terminal blocks and PCB

Your advantages

- ☑ Practical and easy-to-wire conductor connections
- Space-saving accommodation of electronic components in finely graded module versions available with 10 to 150 mm pitch
- Uniform and appropriate housing technology
- High degree of flexibility due to the wide choice of versions
- ☑ User-friendly and safe mounting on DIN rails according to EN 60715
- Inflammability class V0 insulation material (according to UL 94)
- Shock and contamination-proof accommodation of electronic components
- Universal PCBs for all pitches



Key Commercial Data

Packing unit	10 pc	
GTIN	4 017918 082864	
GTIN	4017918082864	

Technical data

General

Housing type	Component housing	
Housing material	Polycarbonate fiber reinforced	
Color (RAL)	green	

Ambient conditions

Ambient temperature (operation)	-40 °C 125 °C
---------------------------------	---------------

Dimensions

Length	75 mm



Electronic housing - EMG 10-B2 - 2947750

Technical data

Dimensions

Height	47.5 mm
Width	10 mm
Pitch	5 mm
Depth	75 mm

Technical data

Power dissipation without gap	0.9 W	
Power dissipation with 20 mm gap	1.2 W	
Number of positions	4	

Standards and Regulations


Flammability rating according to UL 94	V0

Environmental Product Compliance

REACh SVHC	Lead 7439-92-1		
China RoHS	Environmentally Friendly Use Period = 50		
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"		

Drawings

Dimensional drawing

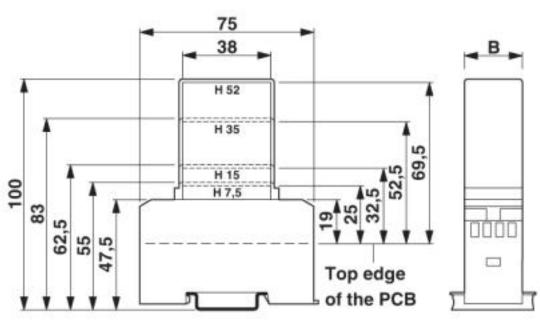

^{1 =} Top edge of the PCB

B = Housing width



Electronic housing - EMG 10-B2 - 2947750

Dimensional drawing 02 6,9 25 64,9 71,8

Pitch 5 mm

a = Area for mounting components, 38 mm in the hood

b = Area for mounting components, 45 mm in the housing

Approvals

Approvais			
Approvals			
Approvals			
EAC			
Ex Approvals			
Approval details			
EAC	EAC		B.01742



Phoenix Contact 2019 © - all rights reserved http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstr. 8 32825 Blomberg Germany Tel. +49 5235 300 Fax +49 5235 3 41200

http://www.phoenixcontact.com