


NOTES

- ターミナル及びネイルの平坦度は0.1MAX.とする。  
COPLANARITY OF TERMINAL AND NAIL IS TO BE 0.1MAX.
- スタンドオフ寸法  
DIMENSIONS OF STAND OFF.
- ロット印字は任意とする  
LOT NUMBERING IS TO BE OPTIONAL.
- 肉抜き位置は任意とする。  
CAVITY IS TO BE OPTIONAL.
- カード検知スイッチ  
DETECT SWITCH

ロットNo. : 6 7 0 7 0  
 月 7 日 月 7 日  
 西暦(1桁目) 7 : 7月  
 THE YEAR OF GRACE A : 10月 B  
 6 : 2006年 B : 11月 DAY  
 C : 12月 07 . 07B  
 ラインNo. LINE No.


カード挿入時 CARD INSERTING POSITION	クローズ CLOSE
カード未挿入時 NO CARD	オープン OPEN

6. ELV及びRoHS適合品  
ELV AND RoHS COMPLIANT

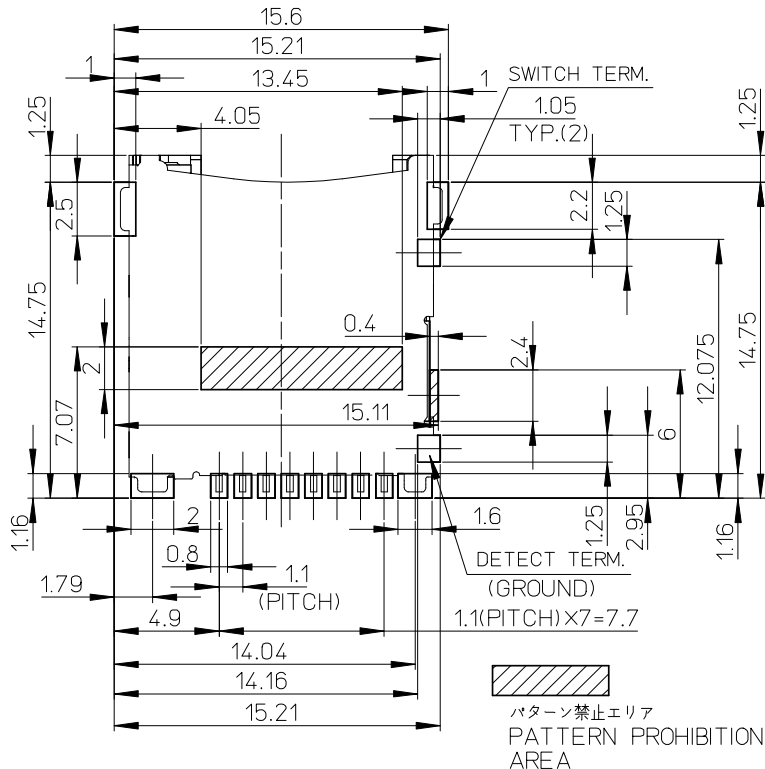

RECOMMENDED PCB PATTERN LAYOUT  
 GENERAL TOLERANCE : ±0.05

EMBOSSSED TAPE	502702-0891	502702-08**
CONNECTOR ONLY	502702-0811	
PACKAGE	MATERIAL NO.	MODEL NO.

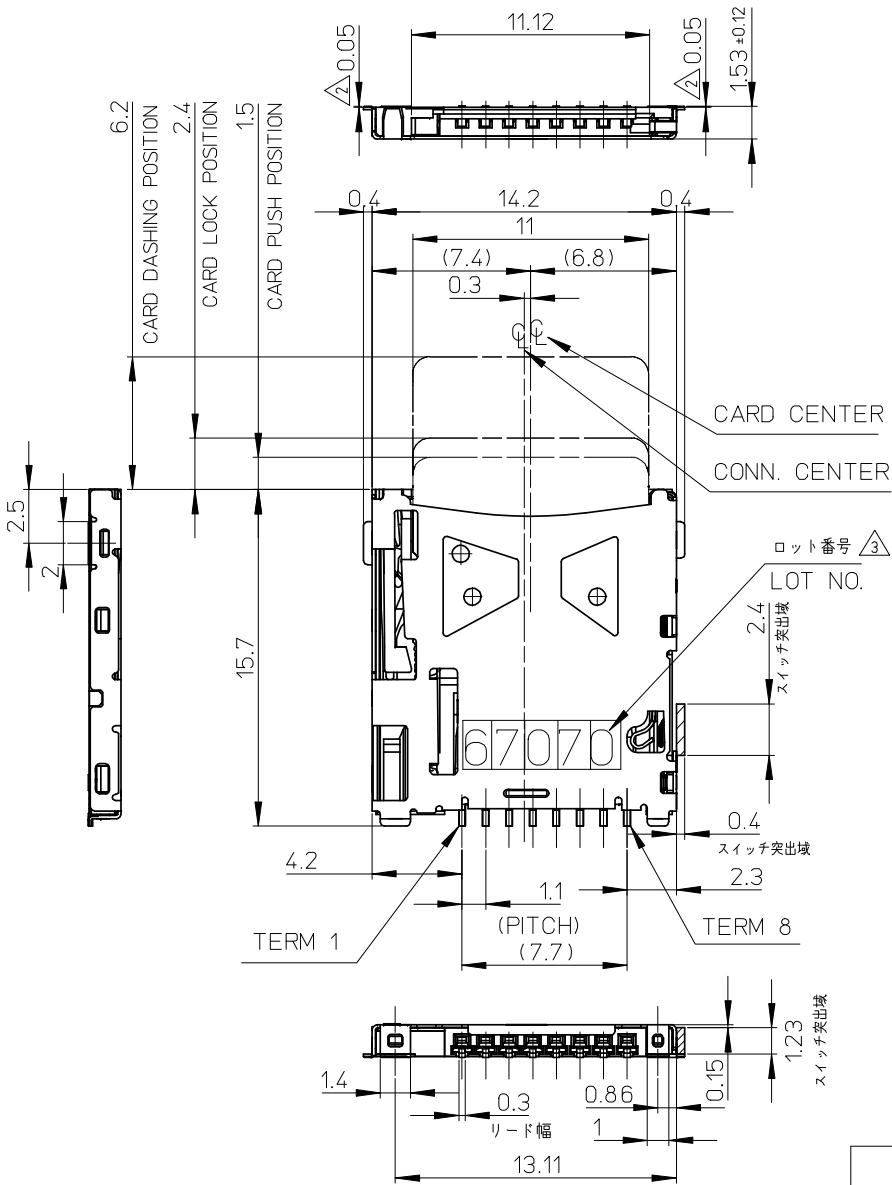

TERM 1	DAT2
TERM 2	CD/DAT3
TERM 3	CMD
TERM 4	Vdd
TERM 5	CLK
TERM 6	VSS
TERM 7	DAT0
TERM 8	DAT1

RELEASED EC NO: J2008-3093 DRWN: NABEI CHKD: THARUYAMA APPR: NUKITA	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY	SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
	10 UNDER ±0.2	DRAWN BY M. NABEI	DATE '08/02/22	TITLE MICRO SD CARD CONN. NORMAL LOW-PROFILE ASS'Y	
	10 OVER 30 UNDER ±0.25	CHECKED BY T. HARUYAMA	DATE '08/02/22	MATERIAL NO. SD-502702-003	
	30 OVER ±0.3	APPROVED BY N. UKITA	DATE '08/02/22	SHEET NO. 1 OF 1	
ANGULAR ±1 °	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE	MATERIAL NO. DOCUMENT NO.	
SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				