


RECOMMENDED LAND PATTERN :
 Zone A must be attached to heat sink. Thermal conductivity of intermediate layers between Zone A and heat sink must be better than 0.1 W / [°C x mm].

PCB Material :Rogers RO4350B,0.508mm thickness
 trace width 1.07mm wide.

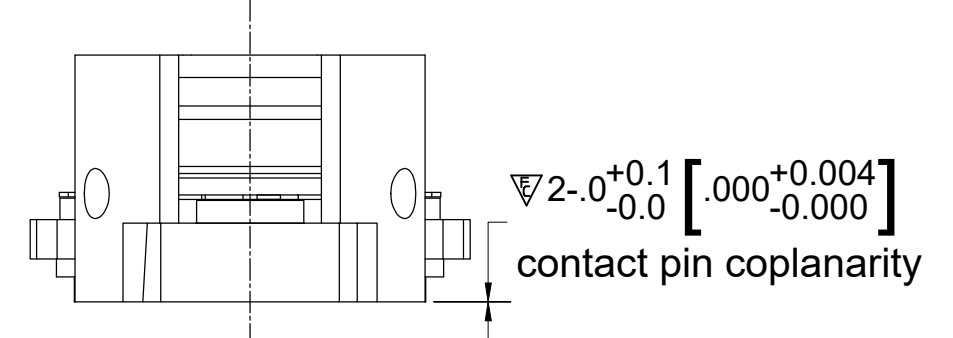

ELECTRICAL SPECIFICATIONS :

Frequency Range	: 3400~3800 MHz
Insertion Loss	: 0.30 dB Max
Isolation	: 20 dB Min
Return Loss(Input/Output)	: 20 dB Min
Peak Power Handling	: 30 W
Power Handling Average	: 20W
Max Reflected Power	: 4W
FWD IMD3 (2x5W)	: -60 dBc Max
Operating Temperature	: -40°C to +105°C
Direction	: CCW

MATERIAL :
 BODY : STEEL, SILVER PLATED
 PIN : COPPER , SILVER PLATED

- NOTES :**
- 1.STANDARD INPUT/OUTPUT IMPEDANCE 50 Ohm
 - 2.LEAD FREE, NO Nd MATERIAL, BeO FREE
 - 3.THE DIMENSION OF DATA MATRIX IS 3.0X3.0MM INFORMATION INCLUDING WORK ORDER NUMBER-SERIAL NUMBER-MATERIAL NUMBER
 - 4.THIS PART COMPLIES WITH ALL RoHS REQUIREMENTS

FOR INFORMATION USE ONLY

ENG PART#: 811-340-380-VT040

FUNCTIONAL SYMBOLS FA=0 FE=0 FP=0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: INITIAL RELEASE		molex	
	DIMENSION UNITS MM	SCALE 1:1	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	4 PLACES ±0.005 ±----		mm	INCH		EC NO: ----
	3 PLACES ±0.025 ±----		2 PLACES ±0.13 ±----			DRWN: SREN05 2021/11/15
DIVISIONAL SYMBOLS	1 PLACE ±0.2 ±----		0 PLACES ±0.4 ±----		CHK'D: JLI252 2022/01/10	
ANGULAR TOL ± 1.5 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: ----	APPR: ----	
THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	
A3-SIZE		73591	0735912039	CUSTOM PART	1 OF 1	

DOCUMENT STATUS	ER	RELEASE DATE	2022/01/10	05:10:22
-----------------	----	--------------	------------	----------