


RoHS COMPLIANT

REV	DATE
B	05/20/'21
C	06/18/'21

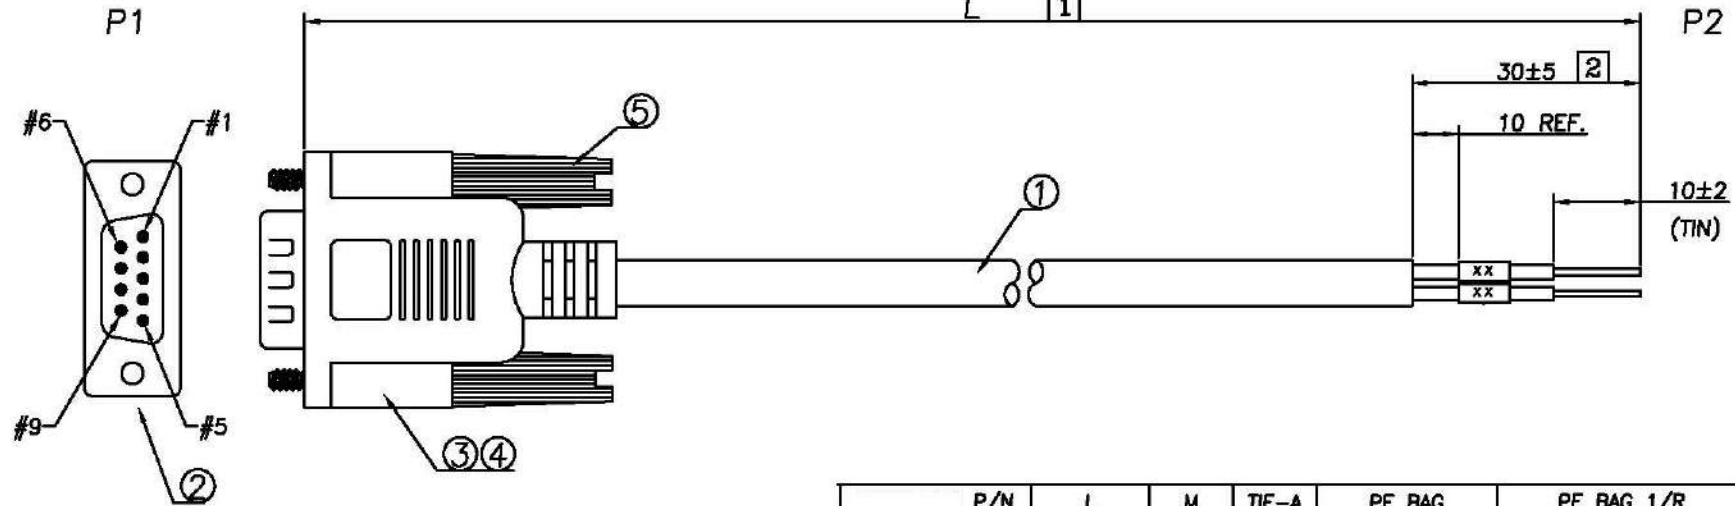

P/N	L	M	TIE-A	PE BAG	PE BAG 1/R	Q'TY
DBC-9MW-01	305±30	0.305		6"x8"x0.06MM	10"x12"x0.06MM 1/10	A/R
DBC-9MW-05	1525±50	1.525	100x2	6"x8"x0.06MM	12"x14"x0.06MM 1/10	A/R
DBC-9MW-10	3050±50	3.05	120x2	7"x10"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-9MW-25	7625±50	7.625		8"x10"x0.06MM	14"x16"x0.06MM 1/5	A/R


PIN ASSIGNMENT

P1	P2		
1	BLACK	P1	
2	BROWN	P2	
3	RED	P3	
4	ORANGE	P4	
5	YELLOW	P5	
6	GREEN	P6	
7	BLUE	P7	
8	PURPLE	P8	
9	GRAY	P9	
S	CUT		

* LABEL: Prop 65 WARNING, 40*15MM	1	PCS	
* PE BAG: L"xW"x0.06MM	A/R	PCS	
* HT-TUBE OD:1.5MM, WHITE 15MM	9	PCS	
* TIE-A BLACK	XX*2	MM	
* CARTON: 46x30x25CM	A/R	PCS	
* PE BAG: 30"x28"x0.06MM	A/R	PCS	
* PE BAG: L"xW"x0.06MM	1	PCS	
5 SCREW #4-40/BLACK	2	PCS	
4 PVC BLACK (UL94-V0)	16	G	
3 PVC-IN	4	G	
2 D-SUB 9PIN MALE, BLACK	1	PCS	
1 UL2464 28AWG 9C+AD BLACK OD:5.0	L	M	
NO.	DESCRIPTION	QTY	UNIT



US SELLER
Fast Shipping From USA



MODEL NAME:

DB09P SINGLE CONNECTOR MOLDING CABLE

MARK EXPLAIN:

- ▲:Revision Change
- ①:Important Dimension
- ①:Note

TOLERANCE:
0.00 : ±0.50
0.0 : ±0.50
0. : ±0.50
ANGLE: ±3.0°
UNIT: mm

COMPUCABLEPLUS
PROVIDING CONNECTIVITY SOLUTIONS