


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/06/08	C	Temperature range was -40°C to +315°C	T.B.	B.S.	
4/25/14	D	Updated to ROHS 2 compliant	T.B.	B.S.	
9/01/17	E	Added Battery part no. Updated Material	T.B.	B.S.	
10/18/19	F	Added weight of the part	T.B.	B.S.	

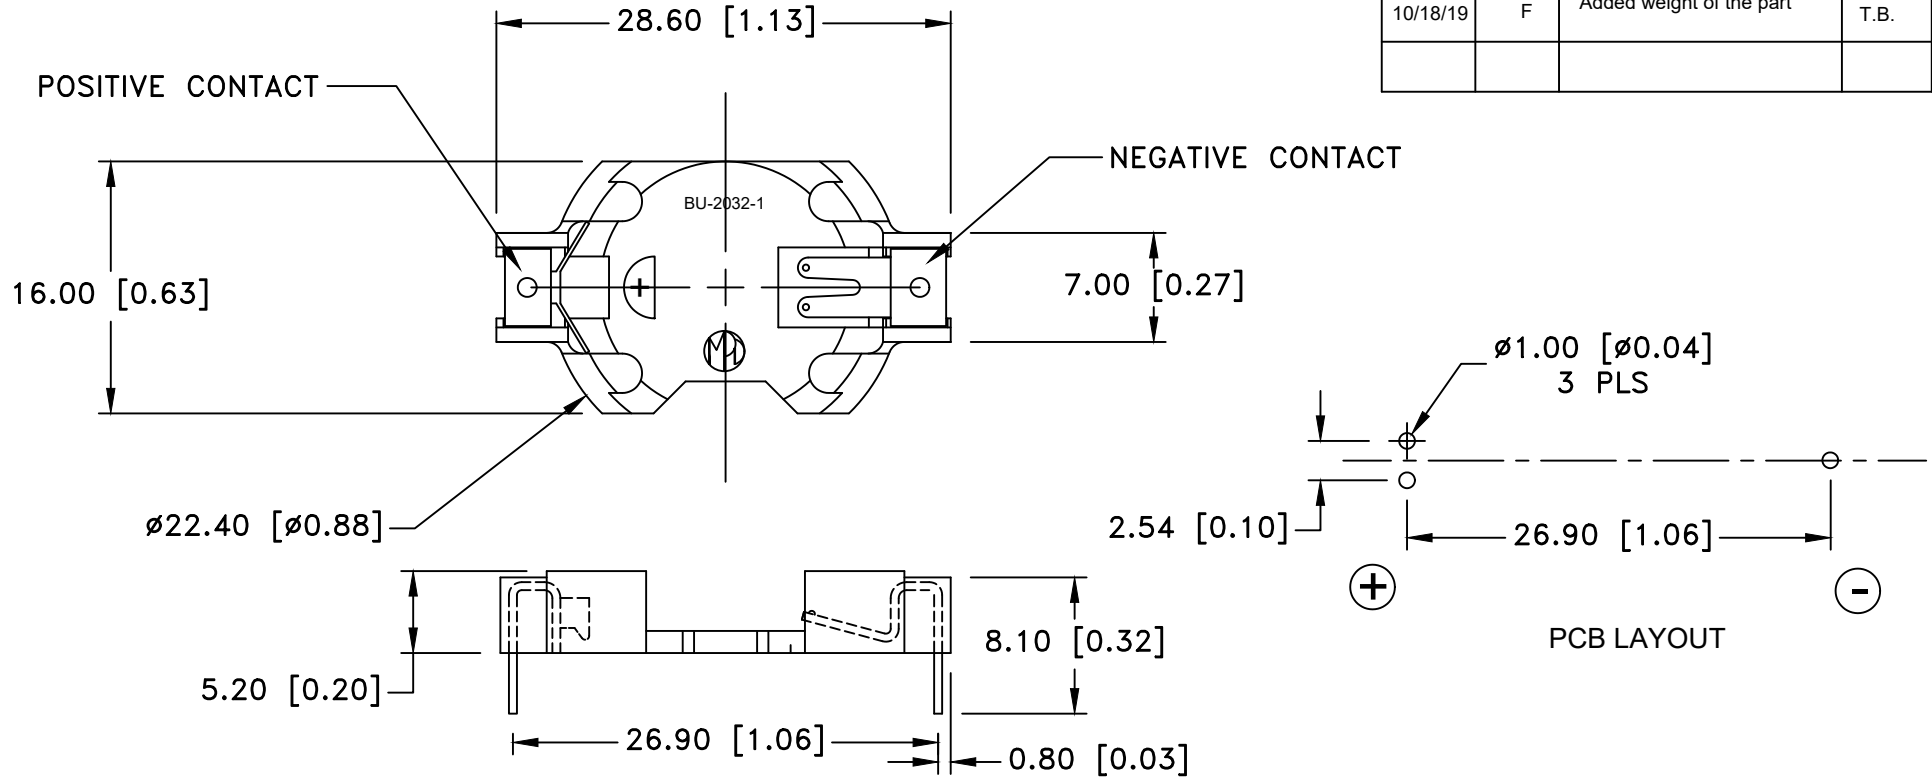


**SPECIFICATIONS:**

- \* Holder material- Off White, 30% glass reinforced Liquid, Crystal Polymer resin, UL File No. E344082, UL94V-0
- \* Contacts : Stainless Steel 301, spring temper, Gold Flash overall
- \* Temperature range: -40°C to +280°C
- \* Vibration Test: 10-50-10 Hz swept in 60 seconds  
X,Y,Z direction: 1 hour each direction
- \* Result: No dislodgement of the cell or damage  
No discontinuity over 10 micro-seconds
- \* Shock Test: Half sine wave acceleration 150G. 6 ms  
3 shock pulses each direction per axis, total of 18 pulses
- \* Result: No evidence of physical damage

ROHS COMPLIANT

Weight: 1.00g

CELL SIZE	RETAINS BATTERY NUMBERS		
20mm Dia. 43.2mm High	CR2032, DL2032, ECR2032, LIR2032		
Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional $\pm .8$ (.030)	Title BU2032-1 CR2032 BATTERY HOLDER, THRU HOLE		
Angular $\pm 3^\circ$	Date 10/18/19	Drawing Number BU2032-1-G	