
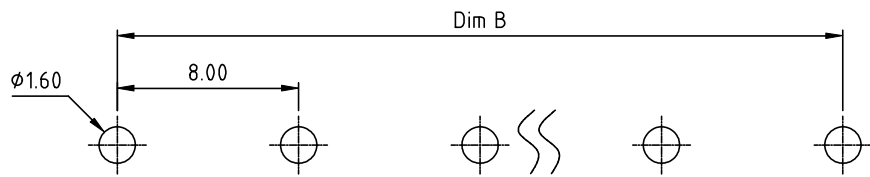
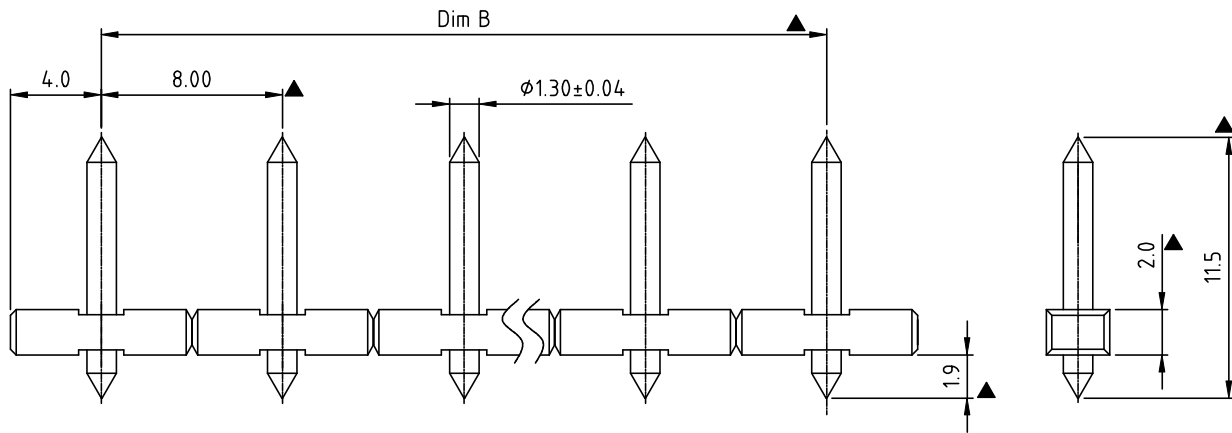


RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
B		07/12-18	Initial release	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

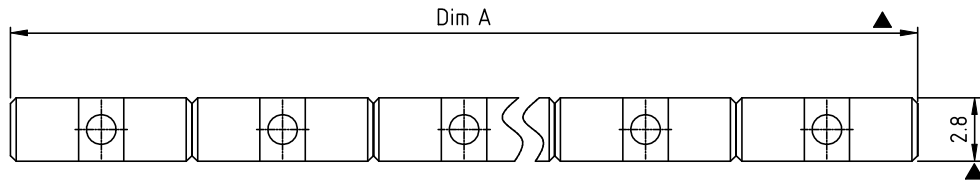

P.C.B. LAYOUT

DIMENSION

Dim A	N×8.0
Dim B	(N-1)×8.0

N = Number of poles

Poles	Tolerance
2P-4P	±0.15
5P-7P	±0.20
8P-10P	±0.30
11P-12P	±0.40

Material:

- Item ③ Terminal(housing):Thermoplastic (UL94V-0)
- Item ④ Contact pin: Brass,Bright Tin plated over Nickel plated

Electrical:

- Voltage rating: 300V
- Current rating: 10A
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Wave soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension: ▲

OP xx 6 3 x x xxxx G

POLES

- 02 2pole
- 02 3pole
-
- 12 12pole

G RoHS compliant (lead<4%)
In copper Alloy
0000: Standard
Any special item by customer request, please contact sales department.

0 Bright Tin plated over Nickel plated

Amphenol
ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		OP-8.0mm series			
PART NO.		OPxx63xxxxxG		DWG NO.	80P0301
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Chen Bo 07/12-18	Chen Bo 07/12-18		
				Tolerance	
				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: B	X° ±1°