

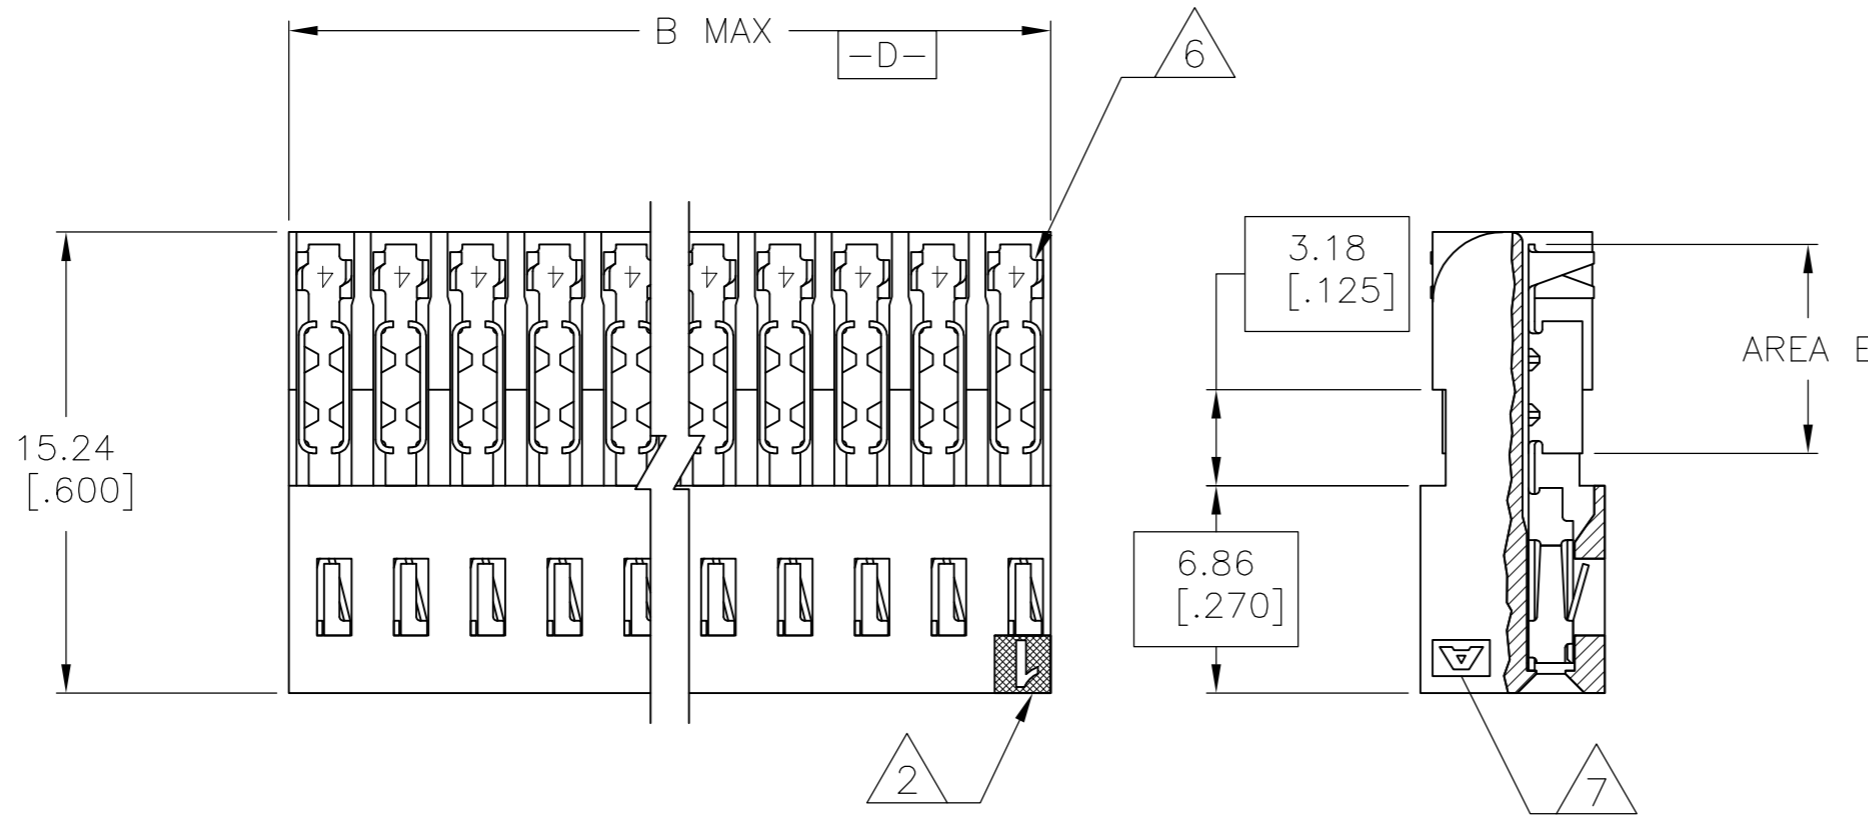


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	REVISED PER ECO-15-008006	27NOV2015	NK	MM

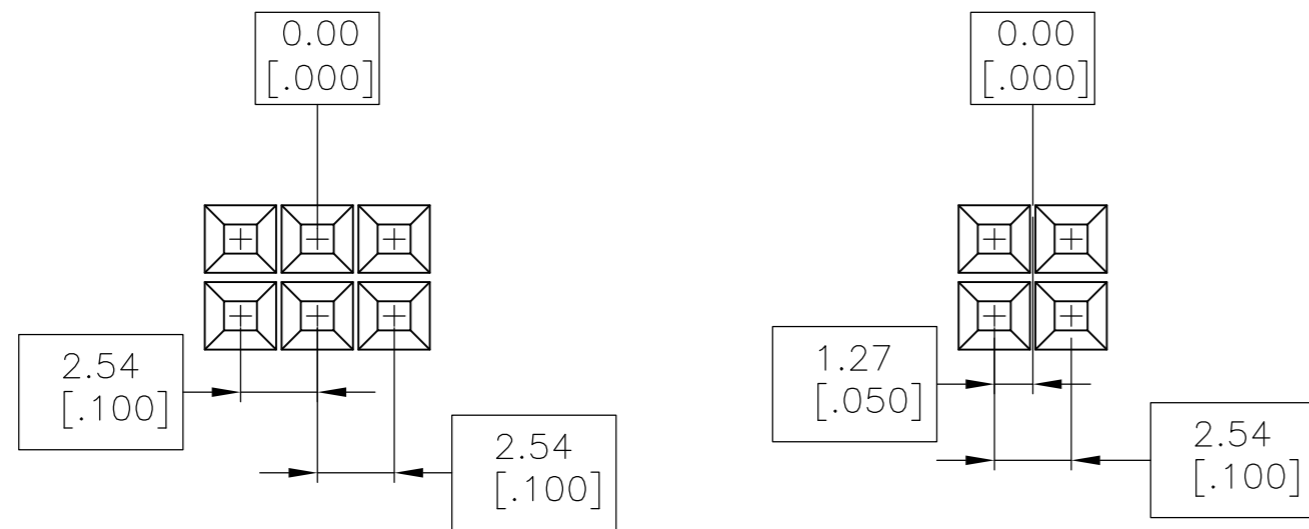

- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 FINISH: 0.00076[.000030] GOLD IN CONTACT AREA, 0.00127[.000050]-0.00254[.000100] TIN-LEAD IN AREA E, ALL OVER 0.00076[.000030] NICKEL.
- 5. USE WITH 26-30 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "4" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 FINISH: 0.00076[.000030] GOLD IN CONTACT AREA, 0.00127[.000050]-0.00254[.000100] TIN IN AREA E, ALL OVER 0.00076[.000030] NICKEL.
- 9 ROHS 2002/95/EC COMPLIANT
- 10 OBSOLETE

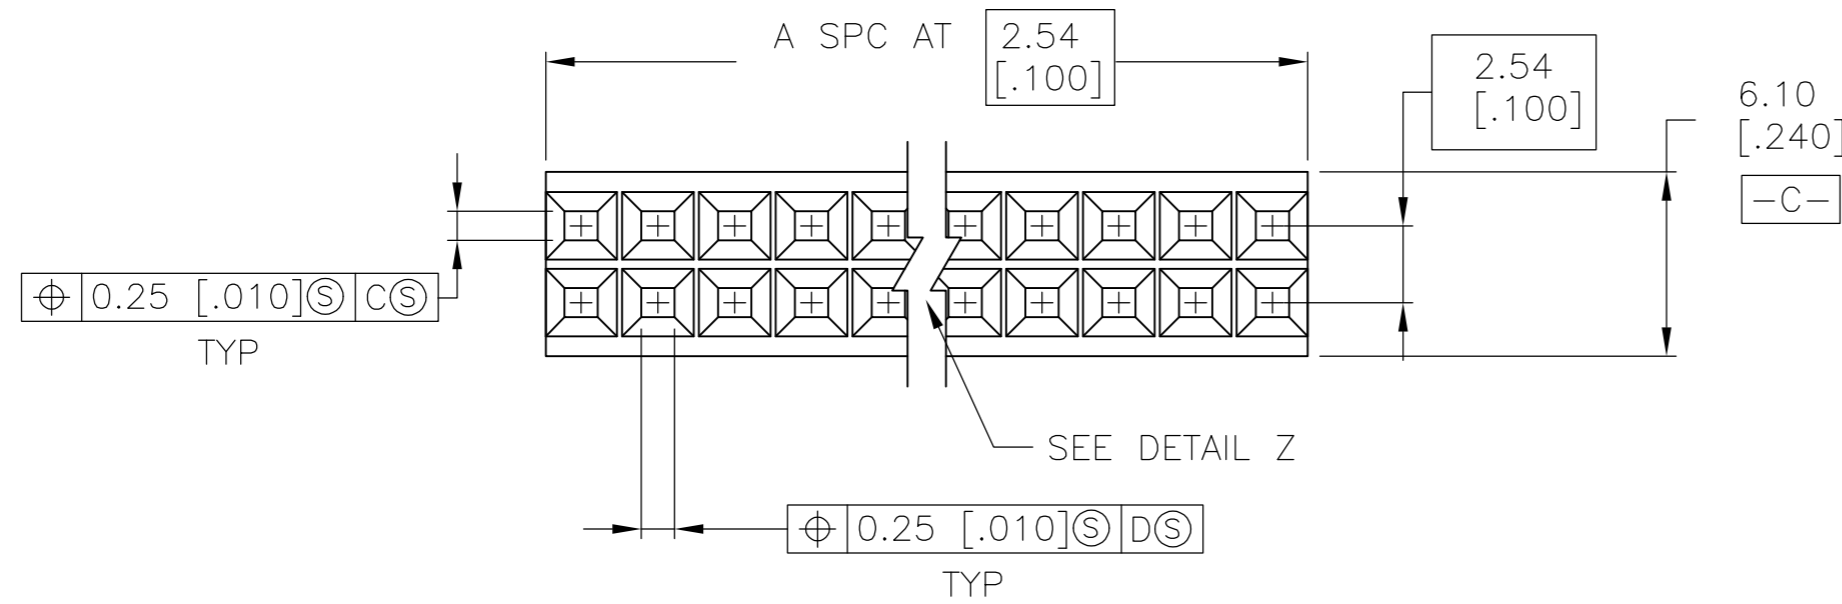

DETAIL Z

8 9	25.40 [1.000]	9	20	5-102693-8
8 9	22.86 [.900]	8	18	5-102693-7
8 9	20.32 [.800]	7	16	5-102693-6
8 9	17.78 [.700]	6	14	5-102693-5
8 9	15.24 [.600]	5	12	5-102693-4
8 9	12.70 [.500]	4	10	5-102693-3
8 9	10.16 [.400]	3	8	5-102693-2
8 9	7.62 [.300]	2	6	5-102693-1
3 10	68.58 [2.700]	26	54	102693-9
	25.40 [1.000]	9	20	102693-8
	22.86 [.900]	8	18	102693-7
	20.32 [.800]	7	16	102693-6
	17.78 [.700]	6	14	102693-5
	15.24 [.600]	5	12	102693-4
	12.70 [.500]	4	10	102693-3
	10.16 [.400]	3	8	102693-2
	7.62 [.300]	2	6	102693-1
	B	A	NO. OF POSN	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.SHUEY 13DEC91	TE TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK M. RIDER 6JAN92				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R.FELIX 7JAN92	NAME RCPT ASSY, DOUBLE ROW, .100 C/L, #26-30 AWG WIRE, HIGH PRESS, MT			
0 PLC ± -		PRODUCT SPEC -	SIZE A2	CAGE CODE 00779	DRAWING NO C=102693	RESTRICTED TO -
1 PLC ± -		APPLICATION SPEC -	WEIGHT -	SCALE 4:1	SHEET 1 OF 1	REV S
2 PLC ± 0.13[.005]		MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK CONTACTS: PHOS BRONZE	CUSTOMER DRAWING			
3 PLC ± -		FINISH SEE TABLE				
4 PLC ± -						
ANGLES ± -						