



**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.6296, DMR	05/26/05	BS
B	ADD ROHS, RFS. 14338, JS	08/13/08	BS
C	CHANGE COLOR TO BLACK/WHITE/GREEN, RFS. 25201, JS	08/13/08	BS

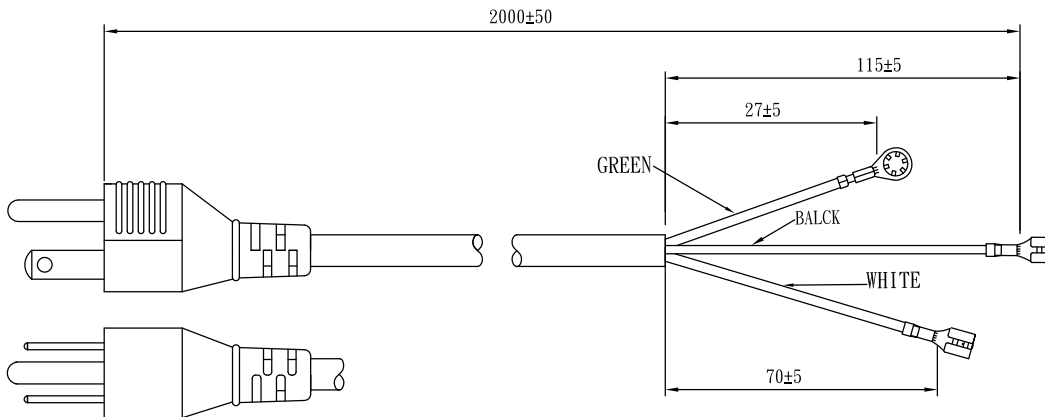

'A'




'B'

**GENERAL SPECIFICATIONS:**

RATING: 15A / 125V AC  
 CABLE TYPE / SIZE: SJT, # 14 AWG, 3 CONDUCTOR  
 TEMPERATURE RATING: 105° C  
 CONDUCTOR COLORS: BLACK / WHITE / GREEN  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2000 ± 50 mm  
 CABLE OUTER DIAMETER: 9.3 ± 0.15 mm  
 END 'A' PLUG: NEMA 5-15P  
 END 'B': SEE TERMINATION TABLE  
 APPROVALS PLUG: UL, CSA OR cUL  
 APPROVALS CABLE: UL, CSA OR cUL

**PACKING:**  
 HANKED

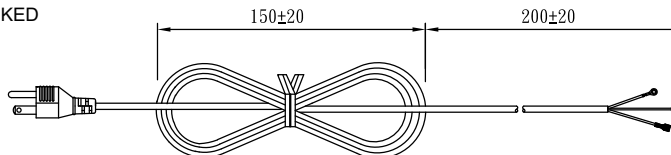

**NOTES:**

- CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

**CONDUCTOR TERMINATION TABLE:**

Wire	Color	ROJ± 5 mm	RIJ±1mm	Terminal
NEUTRAL	WHITE	70	-	MOLEX 19017-0037 OR EQUIVALENT
LINE	BLACK	115	-	MOLEX 19017-0037 OR EQUIVALENT
GROUND	GREEN	27	-	KEYSTONE # 7318 OR EQUIVALENT



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		 <b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: DMR		DATE: 05/27/05		DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET  REV. C  PART NO: <b>3011046F7TTR(R)</b> SHEET 1/1
DRAWN: NF		DATE: 05/27/05		
APRVD: DMR		DATE: 05/27/05		
		SCALE: NONE		

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice