


**Data sheet | Item number: 787-2810**


DC/DC Converter; 24 VDC input voltage; 5/10/12 VDC adjustable output voltage; 0.5 A output current; DC OK contact



[www.wago.com/787-2810](http://www.wago.com/787-2810)

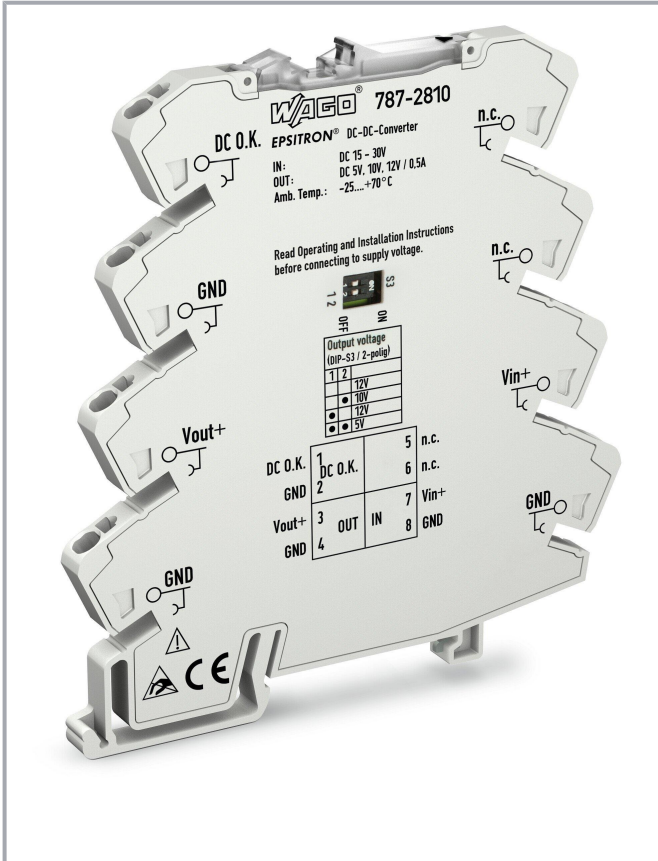

DC O.K.	1		5	n.c.
GND	2		6	n.c.
Vout+	3	OUT	7	Vin+
GND	4	IN	8	GND

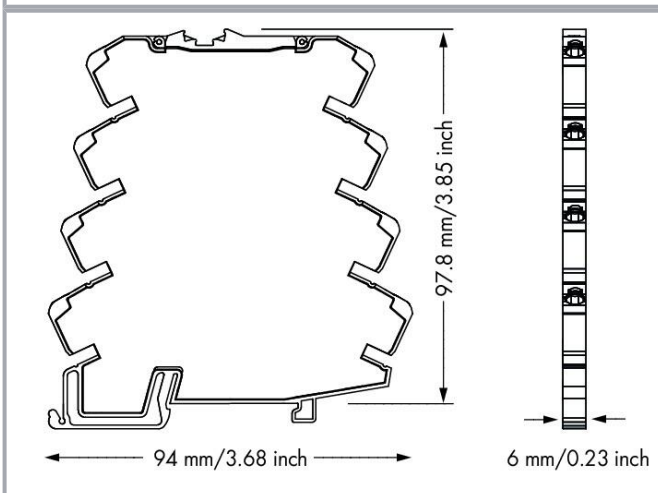

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Item description

### Features:

- DC/DC converter in a compact 6 mm housing
- DC/DC converters (787-28xx) supply devices with 5, 10, 12 or 24 VDC from a 24 or 48 VDC power supply with an output power up to 12 W.
- Output voltage monitoring via DC OK signal output
- Can be commoned with 857 and 2857 Series devices
- Comprehensive range of approvals for multiple applications

## Data

### Technical data

#### Input

Nominal input voltage $U_{i\text{ nom}}$	DC 24 V
Input voltage range	DC 15 ... 30 V
Nominal mains frequency range	0 Hz
Input current $I_i$	$\leq 0.5$ A
Inrush current	$\leq 0.5$ A (at nominal input voltage)

#### Output

Nominal output voltage $U_{o\text{ nom}}$	DC 5 / 10 / 12 V (Adjustable via DIP switch)
Output voltage range	$\pm 3$ %
Nominal output current $I_{o\text{ nom}}$	0.5 A
Nominal output power	2.5 W
Residual ripple	$\leq 20$ mV (peak-to-peak)

### Signaling and Communication

Signaling	1 x LED DC OK (green) 1 x Short circuit LED (red) 1 x Active signal output ( $U_r$ , max. 4 mA)
Operation status indicator	Green LED ( $U_o$ ) Red LED (short circuit)

### Efficiency/power losses

Power loss $P_l$	$\leq 0.21$ W; $\leq 0.7$ W (nominal load)
------------------	--

Subject to changes. Please also observe the further product documentation!



Efficiency (typ.)	82.5 % (at nominal input voltage and nominal output)
-------------------	--

### Circuit protection

Internal fuse	No
---------------	----

### Safety and protection

Protection class	III
Protection type	IP20; per EN 60529
Reverse voltage protection	yes
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	No
MTBF	> 1,800,000 h

### Connection data

Number of jumper slots	8
Connection technology	Push-in CAGE CLAMP®
WAGO connector	WAGO 857 Series
Solid conductor	0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm <sup>2</sup> / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches

### Physical data

Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

### Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

### Material Data

Fire load	0.418 MJ
Weight	36.4 g

Subject to changes. Please also observe the further product documentation!



## Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Relative humidity	95% (no condensation permissible)
Derating	No derating

## Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61000-6-2 EN 61000-6-3 EN 60950-1 UL 61010-2-201

## Commercial data

eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 8.0	EC002540
ETIM 7.0	EC002540
PU (SPU)	1 pcs
Packaging type	bag
Country of origin	DE
GTIN	4055143440745
Customs tariff number	85044083900

## Environmental Product Compliance



CAS-No.	11120-22-2 1303-86-2 1317-36-8 7439-92-1
REACH Candidate List Substance	Diboron trioxide Lead Lead monoxide Lead silicate
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	eabc3905-ffc5-4667-9155-f05b53673875

Subject to changes. Please also observe the further product documentation!


SCIP notification number (Belgium)	0adddd40-e104-4c72-ab7b-1d1debecdb27
SCIP notification number (Bulgaria)	2338fea6-e376-4709-bd5d-70813548af58
SCIP notification number (Czech Republic)	a9ce542d-abc0-4b1f-9c23-01162ffb77ed
SCIP notification number (Denmark)	65351928-1118-4b60-8187-a66b7f4600a6
SCIP notification number (Finland)	24cd08db-1286-42fb-8732-484102a9d921
SCIP notification number (France)	51ad6168-048f-4d4f-a67c-7161b0440fe5
SCIP notification number (Germany)	18db0ecd-84a3-4e81-8e09-aec2199e33d4
SCIP notification number (Hungary)	e50bcb28-ed96-4031-a132-ccc833e6d2df
SCIP notification number (Italy)	110cb643-a819-4932-a51d-cdf356faed29
SCIP notification number (Netherlands)	f3c80b51-245f-442a-b193-968183274aea
SCIP notification number (Poland)	437bb647-6a14-4f72-a293-a2eb4e98b4de
SCIP notification number (Romania)	dc656d91-7c1a-4097-b447-dbe00e114880
SCIP notification number (Sweden)	538d88fe-495d-428b-9f4b-9493b7138130

## Approvals / Certificates

### General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC_Certificate_RU_C-DE.AM02.B.00115_19
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199 Vol3 Sec1

### Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

## Optional accessories

### Tool

Operating tool
----------------

Subject to changes. Please also observe the further product documentation!



**Item no.: 210-720**

Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

[www.wago.com/210-720](http://www.wago.com/210-720)

**Marking accessories**

Marking strip



**Item no.: 2009-110**

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)

Marker



**Item no.: 2009-115**

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/2009-115](http://www.wago.com/2009-115)



**Item no.: 793-501**

WMB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/793-501](http://www.wago.com/793-501)



**Item no.: 793-502**

WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-502](http://www.wago.com/793-502)



**Item no.: 793-503**

WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-503](http://www.wago.com/793-503)



**Item no.: 793-504**

WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-504](http://www.wago.com/793-504)



**Item no.: 793-505**

WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-505](http://www.wago.com/793-505)



**Item no.: 793-506**

WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-506](http://www.wago.com/793-506)



**Item no.: 793-566**

WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white

[www.wago.com/793-566](http://www.wago.com/793-566)



**Item no.: 793-5501**

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white

[www.wago.com/793-5501](http://www.wago.com/793-5501)

**Downloads**

**Documentation**

**Bid Text**

787-2810  
pdf - Datei

2019 Jun 24

pdf  
92.1 kB

Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



787-2810 docx - Datei	2019 Jun 24	docx 20.5 kB	Download
--------------------------	-------------	-----------------	----------

787-2810 X81 - Datei	2019 Feb 19	xml 6.4 kB	Download
-------------------------	-------------	---------------	----------

#### Instruction Leaflet

DC/DC-Wandler	V 1.1.1 2020 Mar 31	pdf 2.4 MB	Download
---------------	------------------------	---------------	----------

#### Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

#### CAD/CAE-Data

##### CAD data

2D/3D Models 787-2810	URL	Download
-----------------------	-----	----------

##### CAE data

EPLAN Data Portal 787-2810	URL	Download
----------------------------	-----	----------

ZUKEN Portal 787-2810	URL	Download
-----------------------	-----	----------

#### Environmental Product Compliance

##### Compliance Search

Environmental Product Compliance 787-2810 DC/DC Converter; 24 VDC input voltage; 5/10/12 VDC adjustable output voltage; 0.5 A output current; DC OK contact	URL	Download
--	-----	----------

#### Installation Notes

Subject to changes. Please also observe the further product documentation!