

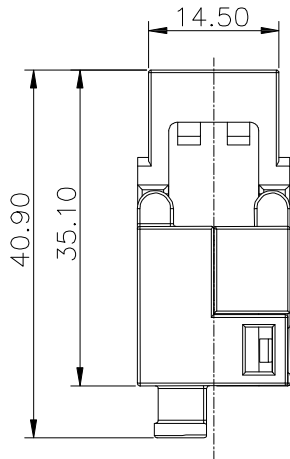
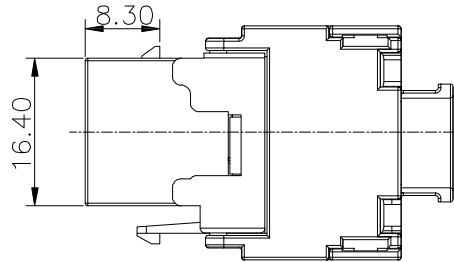



Keystone module, design compatible, CAT 6, shielded



- NOTES:
 General information:
 1. Tool-free Installation
 2. Shielded
 3. Transmission Properties: CAT 6
 4. Area of Application: 250MHz, 1Gbit
 5. Standard: ISO/IEC 11801 ; TIA/EIA 568-C

- ELECTRICAL:
 1. VOLTAGE RATING: 125VAC.
 2. CURRENT RATING: 1.5AMP.
 3. CONTACT RESISTANCE: 100mΩ MAX.
 4. INSULATION RESISTANCE: 1000 MΩ MIN. @ 500 VDC.
 5. DIELECTRIC STRENGTH: 750 VAC 60Hz, 1 MIN.
 6. C6 CONNECTING HARDWARE:
 CONFORM TO ANSI/TIA/EIA-568 B.2-1

- MECHANICAL:
 1. HOUSING MATERIAL: PC UL94V-0 WHITE
 2. INSERT MATERIAL: PBT+30%GF UL94V-0 WHITE
 3. SHELL: Die casting Zinc alloy
 4. PCB MATERIAL: FR-4
 5. CONTACT MATERIAL: PHOSPHOR BRONZE
 50u" selective GOLD PLATING
 6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE t=0.50mm
 7. WIRE: 22~26AWG
 ⑧ MATING CYCLES: 750 CYCLES MIN.
 ⑨ PoE RATING: IEEE 802.3AF AND IEEE 802.3AT

- ENVIRONMENTAL:
 1. STORAGE: -40°C TO +85°C
 2. OPERATION: -40°C TO +85°C

CONFORMING TO TIA/EIA 568B
 MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A

Package: 1pcs/PE bag ; 20pcs/box

RoHS compliant
 Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	12.06.2018	Xavier
X.X	±0.20					Approved	12.06.2019	Amy
X.XX	±0.15							
X.XXX	±0.10							
DIM	TOL	①	Add mating cycles and PoE rating	12.06.2019	Amy			
		②	Drawn	12.06.2018	Xavier			
Angle	±5°	Id.	Modification	Date	Name			

Customer-No.	
ASSMANN WSW-No. A-KEY-8-EG-GIB-S2	
Drawing-No.	rev01
ASS 7981 CO	Sheet
Replace	